

Belt Weighing



4/2	Introduction
4/4	Belt scales
4/4	Milltronics MLC
4/9	Milltronics MUS
4/14	Milltronics MCS
4/19	Milltronics MSI and MMI
4/28	Milltronics WD600
4/31	SITRANS WB300
4/35	SITRANS WB310
4/38	Speed sensors
4/38	Milltronics TASS
4/40	Milltronics RBSS
4/43	SITRANS WS300
4/48	Accessories
4/48	Calibration weight lifter Milltronics MWL
4/53	Milltronics flat bar calibration weights
4/54	Test chain
4/58	Test chain storage reel
4/61	Bend pulleys
4/65	Belt scale peripherals

Belt Weighing


Introduction

Overview

Belt scales help maximize the use of raw materials, control inventories, and aid in the manufacturing of a consistent product. Belt scales from Siemens are easy to install and require little maintenance. They produce repeatable, accurate results. These belt scales show minimal hysteresis and superior linearity, and ignore side loading. Load cell overload protection is a feature of the belt scale design.

Typical system

A typical belt scale system has a weigh bridge structure supported on load cells, an electronic integrator, and a belt speed sensor. The load cells measure the material weight on the belt, and send a signal to the integrator. The integrator also receives input in the form of electrical pulses from a belt speed sensor connected to a tail or bend pulley. Using these two sources of data, the integrator calculates the rate of material transferred along the belt using the equation $\text{weight} \times \text{speed} = \text{rate}$.

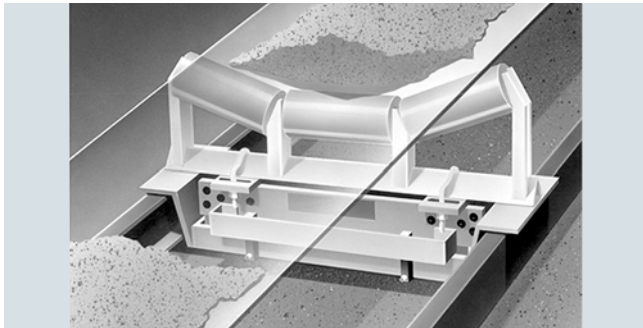


Belt scale operation

Mode of operation

Siemens belt scales only measure the vertical component of the applied force. As material moves down the conveyor belt and travels over the belt scale, it exerts a force proportional to the material load through the suspended idler directly to the load cells. The resulting force applied in each load cell is sensed by its strain gauges. When the strain gauges are excited by voltage from the electronic integrator, they produce an electrical signal proportional to belt loading, which is then applied to the integrator.

The vertical movement of the load cells is limited by the positive overload stop incorporated into the design of the belt scale or load cells. The stops protect the load cells from failure in the event of extreme overload forces.

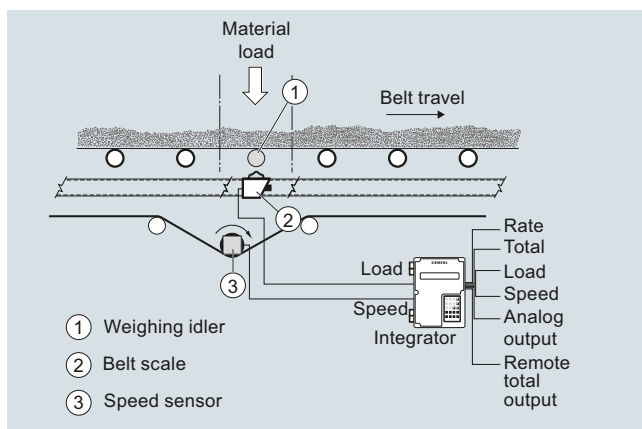

Installation tips

Position the scale

Locate the scale close to the tail section of the conveyor belt where tension is minimal and more consistent. Mount the scale on rigid mountings, away from equipment that may produce measurement disturbing vibrations. Avoid variable tension points, transition points, or slope change. The ideal location is a horizontal, even belt section, but you can achieve good results on slopes if the idlers are properly aligned. If the conveyor curves, locate the scale a proper distance from the tangent points of the curve. For concave curved conveyors, the recommended minimum distance is 12 m (40 ft) from the tangent points of the curve. With convex conveyors, the minimum distance is 6 m (20 ft) on the approach side, and 12 m (40 ft) on the retreat side. Be sure to install the scale a sufficient distance from the infeed section (at least one idler space) so the material has time to settle properly on the belt.

Reduce variable belt tension

With temperature variations, load, and other circumstances, the belt tension will change. To maintain proper tension, a gravity take-up is recommended. This is a weight designed to take up slack on the belt. A gravity take-up should move freely and place consistent tension on the belt. The use of screw take-ups should be limited to conveyors with pulley centers to 18.3 m (60 ft) or less. The amount of weight should conform to the conveyor design specifications.

Align the idlers

Precise idler alignment is essential. At least two idlers on each side of the scale should be aligned with the belt scale; use three or more for high accuracy applications. To check alignment, use wire, string, or fishing line across the top outer edges of the rollers and tighten enough to eliminate sag. Adjust the height of the rollers with shims until they are all even, or at least within $\pm 0.8 \text{ mm}$ (1/32 inch). All of the scale-area idlers should be the same type (size, diameter, style, trough angle, and manufacture) and should be spaced at equal distances. Locate training idlers a minimum of 9 m (30 ft) from the belt scale idler.

Install speed sensors

The speed sensor should be attached to the tail pulley or bend pulley shaft so the connection does not slip. It is important that the speed sensor be properly mounted as described in the Operating Instructions and free of excessive vibration. Whenever possible, mount the speed sensor on a solid face pulley. The use of wing- or beater-type pulleys is not recommended.

Wheel driven speed sensors, that are applied to the return strand of the belt, should be located close to a return idler to ensure a stable drive surface.

Wire the scale

Follow good instrumentation wiring practices to protect the load cell and speed sensor signals from radio frequency interference and induction. Use terminal blocks, shielded cable, and grounded metal conduit for all wiring.

Technical specifications

Criteria	Typical industries	Typical applications	Maximum capacity	Maximum belt speed	Loading range	Accuracy ¹⁾		Approvals
						Value	Specified range	
Milltronics MLC	<ul style="list-style-type: none"> Animal feed Fertilizers Food processing Tobacco 	Secondary industries	50 t/h (55 STPH) at max. belt speed	2.0 m/s (400 fpm)	Light	± 0.5 ... 1 %	25 ... 100 %	CE, RCM, EAC
Milltronics MUS	<ul style="list-style-type: none"> Aggregates Agricultural Mining Cement 	<ul style="list-style-type: none"> Aggregates Medium- to heavy-duty 	5 000 t/h (5 500 STPH) at max. belt speed	3.0 m/s (600 fpm)	Light to heavy	± 0.5 ... 1 %	25 ... 100 %	CE, RCM, EAC
Milltronics MCS	Aggregates	<ul style="list-style-type: none"> Mobile crushers Aggregates Screening plants Heavy-duty 	2 400 t/h (2 640 STPH) at max. belt speed	3.0 m/s (600 fpm)	Light to heavy	± 0.5 ... 1 %	25 ... 100 %	CE, CSA/FM, ATEX, IECEx, RCM, EAC
Milltronics MSI	<ul style="list-style-type: none"> Cement Chemicals Coal Food processing Mineral processing Mining 	<ul style="list-style-type: none"> Industrial heavy-duty Custody transfer 	12 000 t/h (13 200 STPH) at max. belt speed	5.0 m/s (984 fpm)	Moderate to heavy	± 0.5 % or better	20 ... 100 %	SABS, MID, OIML, Measurement Canada, CE, CSA/FM, ATEX, IECEx, RCM, EAC
Milltronics MMI	<ul style="list-style-type: none"> Cement Chemicals Coal Food processing Mineral processing Mining 	<ul style="list-style-type: none"> Industrial heavy-duty Custody transfer 	12 000 t/h (13 200 STPH) at max. belt speed	5.0 m/s (984 fpm)	Moderate to heavy	MMI-2 (2 idler): ± 0.25 % or better MMI-3 (3 idler): ± 0.125 % or better	20 ... 100 % 25 ... 10 %	NTEP, MID, OIML, Measurement Canada, CE, CSA/FM, ATEX, IECEx, RCM, EAC
Milltronics WD600	<ul style="list-style-type: none"> Food Pharmaceutical and tobacco industries 	<ul style="list-style-type: none"> Process and load-out control Light- to medium-duty 	Up to 100 t/h	2.0 m/s (400 fpm) maximum	Light to moderate	± 0.5 ... 1 %	25 ... 100 %	CE, meets FDA/USDA requirements for food processors, RCM, EAC
SITRANS WB300	Cement	Heavy-duty pan conveyors	Up to 5 000 t/h	1 m/s (200 fpm) maximum	Heavy	± 2 %	33 ... 100 %	CE, RCM
SITRANS WB310	Recycle	Light-duty	Up to 5 000 t/h	1 m/s (200 fpm) maximum	Light to moderate	± 5 %	25 ... 100 %	CE, RCM

¹⁾ Accuracy subject to: on factory approved installations the belt scale system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

Belt Weighing

Belt scales

Milltronics MLC

Overview



Milltronics MLC is a low-capacity scale for light belt loading.

Application

The MLC is suitable for monitoring such products as fertilizer, tobacco, animal feed pellets, or sugar.

The MLC's proven use of parallelogram style load cells results in fast reaction to vertical forces, ensuring instant response to product loading. This enables it to provide outstanding accuracy and repeatability even with very light loading. The MLC may be easily installed in existing flat belt conveyors or belt feeders.

Operating with Milltronics BW500, SIWAREX WT241, WP241, or FTC microprocessor-based integrators, the MLC provides indication of flow rate, total weight, belt load and belt speed of bulk solids materials on a belt conveyor. A speed sensor monitors conveyor belt speed for input to the integrator. When used in conjunction with Milltronics BW500 integrator with PID controller, the MLC may also be used in the food industry as part of a pre-feed control system for extruders, cookers and de-hydrators.

Benefits

- Unique parallelogram style load cell design
- Designed for light product loading
- Compact and easy to install
- System includes weighing idler
- Stainless steel option
- Low cost of ownership

Technical specifications

Milltronics MLC		Milltronics MLC	
Mode of operation		Load cell	
Measuring principle	Strain gauge load cell measuring load on flat belt conveyor idler	Construction	17-4 PH (1.4568) stainless steel construction with 304 (1.4301) stainless steel cover Strain gauge protection: polybutadiene
Typical application	Monitor fertilizer, tobacco, animal feed pellets, sugar, cereal	Degree of protection	IP67
Performance		Cable length	3 m (10 ft)
Accuracy ¹⁾	± 0.5 ... 1.0 % of totalization over 25 ... 100 % operating range	Excitation	10 V DC nominal, 15 V DC maximum
Repeatability	± 0.1 %	Output	2 mV/V excitation at rated load cell capacity
Medium conditions		Non-linearity	0.03 % of rated output
Max. material temperature	85 °C (185 °F)	Hysteresis	0.05 % of rated output
Belt design		Non-repeatability	0.03 % of rated output
Belt width	<ul style="list-style-type: none"> • 450 ... 1 200 mm • 18 ... 48 inch 	Capacity	10 or 20 lb
Belt speed	2.0 m/s (400 fpm) maximum ²⁾	Overload	150 % of rated capacity, ultimate 300 % of rated capacity
Capacity	Up to 50 t/h (55 STPH)	Temperature	<ul style="list-style-type: none"> • -40 ... +85 °C (-40 ... +185 °F) operating range • -10 ... +60 °C (14 ... 140 °F) compensated
Conveyor incline		Mounting dimensions	Identical for all capacities
Idlers		Hazardous locations	Consult the factory
Conveyor idler	Horizontal	Approvals	CE, RCM, EAC, KCC
Idler diameter	50 or 60 mm (1.90 or 2.30 inch)		
Idler spacing	0.5 ... 1.5 m (1.6 ... 5.0 ft)		

¹⁾ Accuracy subject to: on factory approved installations the belt scale system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

²⁾ Contact Siemens application engineering (factorysupport.smpi@siemens.com) for consideration of higher belt speeds.

Belt Weighing

Belt scales

Milltronics MLC

Selection and ordering data

Milltronics MLC belt scale

Low-capacity scale for light belt loading that comes complete with a weighing idler.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Belt width/Scale construction

C5-M rated polyester painted mild steel

18 inch (457 mm)

24 inch (610 mm)

30 inch (762 mm)

36 inch (914 mm)

42 inch (1 067 mm)

48 inch (1 219 mm)

500 mm (20 inch)

650 mm (26 inch)

800 mm (32 inch)

1 000 mm (39 inch)

1 200 mm (47 inch)

450 mm (18 inch)

Stainless steel 304 (1.4301), bead blast finish
(1 ... 6 µm, 40 ... 240 µin)

18 inch (457 mm)

24 inch (610 mm)

30 inch (762 mm)

36 inch (914 mm)

42 inch (1 067 mm)

48 inch (1 219 mm)

500 mm (20 inch)

650 mm (26 inch)

800 mm (32 inch)

1 000 mm (39 inch)

1 200 mm (47 inch)

450 mm (18 inch)

Load cell capacity

10 lb (4.55 kg)

20 lb (9.09 kg)

Not specified¹⁾

Weighing idler dimensions

50 mm (1.96 inch)²⁾

60 mm (2.40 inch)³⁾

1.90 inch (48.2 mm)⁴⁾

Article No.

7MH7126-

1 A

1 B

1 C

1 D

1 E

1 F

1 G

1 H

1 J

1 K

1 L

1 M

2 A

2 B

2 C

2 D

2 E

2 F

2 G

2 H

2 J

2 K

2 L

2 M

A

B

X

1

2

5

Further designs

Please add **"-Z"** to article no. and specify order code(s).

Stainless steel tag [69 x 38 mm (2.7 x 1.5 inch)],
Measuring-point number/ identification
(max 27 characters), specify in plain text.

Application Eng. reference number
(max. 15 characters), specify in plain text.

Manufacturer's test certificate: according to EN 10204-2.2

FDA compliant version. Conduit and fittings designed for
food applications conforming to FDA/USDA standards

Operating instructions

All literature is available to download for free, in a
range of languages, at

<http://www.siemens.com/weighing/documentation>

Spare parts

Load cell, 10 lb (4.55 kg), 17-4 PH (1.4568) stainless
steel construction with 304 (1.4301) stainless steel
cover, includes hardware

Load cell, 20 lb (9.09 kg), 17-4 PH (1.4568) stainless
steel construction with 304 (1.4301) stainless steel
cover, includes hardware

Conduit replacement kit

FDA conduit replacement kit

Milltronics MLC calibration weight [Stainless Steel 304 (1.4301)]

For scales with belt width of 18 inch or 500 mm or
450 mm

1.05 lb (0.47 kg)

1.63 lb (0.73 kg)

2.35 lb (1.06 kg)

3.21 lb (1.45 kg)

For scales with belt width of 24 inch or 650 mm

1.38 lb (0.62 kg)

2.15 lb (0.97 kg)

3.11 lb (1.41 kg)

4.24 lb (1.91 kg)

For scales with belt width of 30 inch or 800 mm

1.72 lb (0.77 kg)

2.67 lb (1.21 kg)

3.85 lb (1.73 kg)

5.26 lb (2.37 kg)

For scales with belt width of 36 inch or 1 000 mm

2.05 lb (0.92 kg)

3.19 lb (1.44 kg)

4.56 lb (2.07 kg)

6.29 lb (2.83 kg)

For scales with belt width of 42 inch or 1 000 mm

2.38 lb (1.07 kg)

3.71 lb (1.67 kg)

5.35 lb (2.41 kg)

7.31 lb (3.29 kg)

Order Code

Y15

Y31

C11

K01

Article No.

PBD-23900244

PBD-23900245

7MH7723-1NA

7MH7723-1QL

7MH7724-1AL

7MH7724-1AM

7MH7724-1AN

7MH7724-1AP

7MH7724-1AQ

7MH7724-1AR

7MH7724-1AS

7MH7724-1AT

7MH7724-1AU

7MH7724-1AV

7MH7724-1AW

7MH7724-1AX

7MH7724-1AY

7MH7724-1BA

7MH7724-1BB

7MH7724-1BC

7MH7724-1BD

7MH7724-1BE

7MH7724-1BF

7MH7724-1BG

¹⁾ Only for quotation purposes, not a valid ordering option.

²⁾ Available with Belt width/Scale construction options 1G ... 1M and 2G ... 2M only.

³⁾ Available with Belt width/Scale construction options 1G ... 1M only.

⁴⁾ Available with Belt width/Scale construction options 1A ... 1F and 2A ... 2F only.

Selection and ordering data

Article No.

For scales with belt width of 48 inch or 1 200 mm

2.72 lb (1.22 kg)


4.23 lb (1.92 kg)

6.06 lb (2.75 kg)


8.34 lb (3.75 kg)

 Note: calibration accessories should be ordered as
 a separate item on the order.
7MH7724-1BH**7MH7724-1BJ****7MH7724-1BK****7MH7724-1BL**
Dimensional drawings


Installation

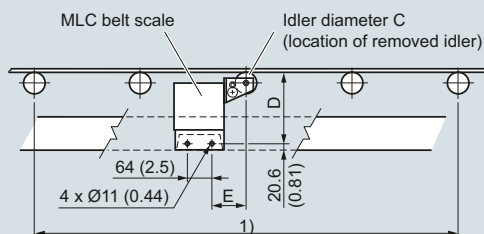

Plan View

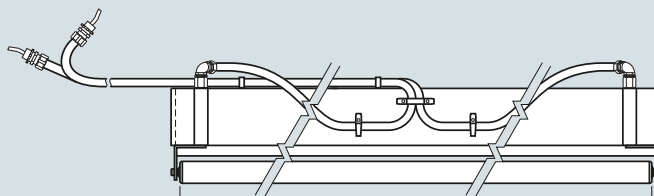

Front View

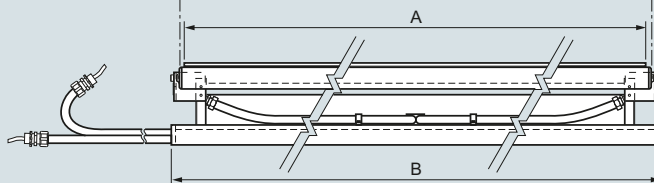

1) For pan supported belts, the belt should be cut out to allow the MLC and at least two (preferably four) other idlers to be installed.

Imperial designs [dimensions in inch (mm)]

Scale size	'A' roller width	'B' dimension	'C' dimension	'D' dimension	'E' dimension
18 (457)	18 (457)	19 (483)	1.90 (48.3)	6.19 (157)	3.5 (89)
24 (610)	24 (610)	25 (635)	1.90 (48.3)	6.19 (157)	3.5 (89)
30 (762)	30 (762)	31 (787)	1.90 (48.3)	6.19 (157)	3.5 (89)
36 (914)	36 (914)	37 (940)	1.90 (48.3)	6.19 (157)	3.5 (89)
42 (1 067)	42 (1 067)	43 (1 092)	1.90 (48.3)	6.19 (157)	3.5 (89)
48 (1 219)	48 (1 219)	49 (1 245)	1.90 (48.3)	6.19 (157)	3.5 (89)

Metric designs [dimensions in mm (inch)]

Scale size	'A' roller width	'B' dimension	'C' dimension	'D' dimension	'E' dimension
450 (17.72)	450 (17.72)	500 (19.69)	50 (1.97)	158 (6.22)	96 (3.78)
500 (19.69)	500 (19.69)	550 (21.65)	50 (1.97)	158 (6.22)	96 (3.78)
650 (25.59)	650 (25.59)	700 (27.56)	50 (1.97)	158 (6.22)	96 (3.78)
800 (31.50)	800 (31.50)	850 (33.46)	50 (1.97)	158 (6.22)	96 (3.78)
1 000 (39.37)	1 000 (39.37)	1 050 (41.34)	60 (2.36)	158 (6.22)	96 (3.78)
1 200 (47.24)	1 200 (47.24)	1 250 (49.21)	60 (2.36)	158 (6.22)	96 (3.78)


MLC, dimensions in mm (inch)

Belt Weighing

Belt scales

Milltronics MLC

Circuit diagrams

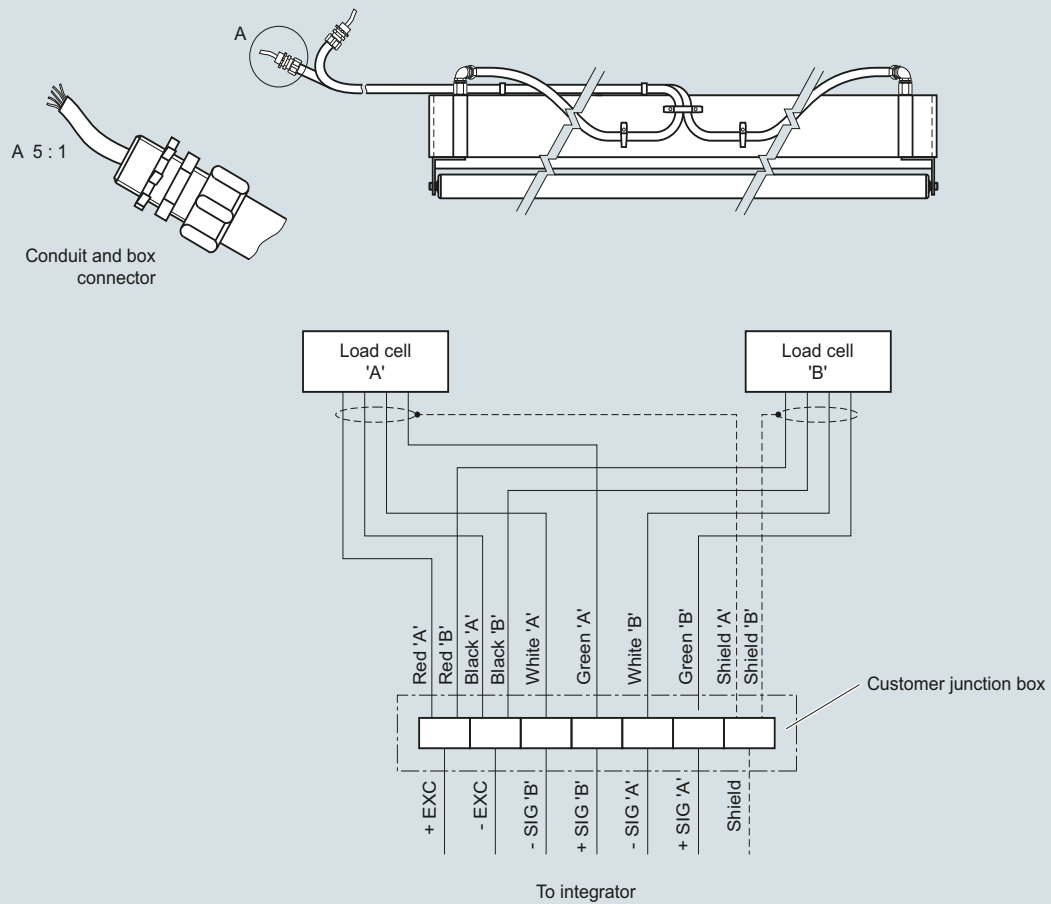

Note:

Conduit and cable arrangement may differ from example shown.

MLC connections

Overview

Milltronics MUS is a modular designed, medium- to heavy-duty belt scale for process indication.

Idler not included with belt scale.

Benefits

- Unique modular design
- Simple installation
- Low cost
- Easy retrofit

Application

Milltronics MUS operates with products like aggregates, sand, or minerals, providing continuous in-line weighing at a minimal cost. With no cross bridge, this versatile unit will fit most conveyor widths and standard idlers, and product build-up is reduced.

The construction and easy assembly of the MUS ensures quick delivery to meet even the tightest of schedules. Where scales are moved from conveyor to conveyor, the MUS also provides unmatched flexibility.

Operating with Milltronics BW500, SIWAREX WT241, WP241, or FTC microprocessor-based integrators, the MUS provides indication of flow rate, total weight, belt load, and speed of bulk solids materials on a belt conveyor. A speed sensor monitors conveyor belt speed for input to the integrator.

Belt Weighing

Belt scales

Milltronics MUS

Technical specifications


Milltronics MUS	
Mode of operation	
Measuring principle	Heavy duty strain gauge load cells measuring load on belt conveyor idlers
Typical applications	<ul style="list-style-type: none"> Monitor fractionated stone on secondary surge belts and recirculating loads Track daily production totals
Measurement accuracy	
Accuracy ¹⁾	± 0.5 ... 1 % of totalization over 25 ... 100 % operating range, application dependent
Repeatability	± 0.1 %
Medium conditions	
Max. material temperature	65 °C (150 °F)
Belt design	
Belt width	<ul style="list-style-type: none"> Standard duty up to 1 000 mm (CEMA width up to 42 inch) Heavy-duty up to 1 524 mm (CEMA width up to 60 inch) Refer to dimensional drawing
Belt speed	Up to 3.0 m/s (600 fpm) ²⁾
Capacity	Up to 5 000 t/h at maximum belt speed
Conveyor incline	<ul style="list-style-type: none"> ± 20° from horizontal, fixed incline Up to ± 30° with reduced accuracy³⁾
Idlers	
Idler profile	<ul style="list-style-type: none"> Flat to 35° To 45° with reduced accuracy³⁾
Idler diameter	50 ... 180 mm (2 ... 7 inch)
Idler spacing	0.6 ... 1.5 m (2.0 ... 5.0 ft)

Milltronics MUS	
Load cell	
Construction	Nickel plated alloy steel Strain gauge protection: silicon
Degree of protection	IP66
Cable length	3 m (10 ft)
Excitation	10 V DC nominal, 15 V DC max.
Output	2 mV/V excitation at rated load cell capacity
Non-linearity and hysteresis	0.02 % of rated output
Non-repeatability	0.01 % of rated output
Capacity	
• Standard duty ranges	20, 30, 50, 75, 100 kg (44, 66, 110, 165, 220 lb)
• Heavy-duty ranges	50, 100, 150, 200, 500 kg (110, 220, 330, 440, 1 100 lb)
Overload	150 % of rated capacity, ultimate 200 % of rated capacity
Temperature	<ul style="list-style-type: none"> -40 ... +65 °C (-40 ... +150 °F) operating range -10 ... +40 °C (15 ... 105 °F) compensated
Weight	
	Standard duty up to 44 lb (20 kg), 22 lb (10 kg) per side
	Heavy-duty up to 64 lb (30 kg), 32 lb (15 kg) per side
Interconnection wiring (to integrator)	
	<ul style="list-style-type: none"> < 150 m (500 ft) 18 AWG (0.75 mm²) 6 conductor shielded cable > 150 m ... 300 m (500 ... 1 000 ft) 18 ... 22 AWG (0.75 ... 0.34 mm²) 8 conductor shielded cable
Hazardous locations	
	Consult the factory
Approvals	
	CE, RCM, EAC, CMC, KCC

¹⁾ Accuracy subject to: on factory approved installations the belt scale system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

²⁾ Contact Siemens application engineering (factorysupport.smpi@siemens.com) for consideration of higher belt speeds.

³⁾ Review by Siemens application engineer required.

Selection and ordering data		Article No.	Article No.	
Milltronics MUS belt scale Modular design, medium- to heavy-duty scale for process indication. Flat bar calibration weights are optional and should be ordered as separate items, see page 4/53. ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		7MH7123-  0	Spare parts <u>Standard Duty Scale Load Cell</u> 20 kg (44.1 lb) 30 kg (66.1 lb) 50 kg (110.2 lb) 75 kg (165.3) 100 kg (220.5 lb) <u>Heavy-Duty Scale Load Cell</u> 50 kg (110.2 lb) 100 kg (220.5 lb) 150 kg (330.7 lb) 200 kg (440.9 lb) 300 kg (661.4 lb) 500 kg (1 120.3 lb) Rock Guard, MUS Standard Duty Scale, spare Conduit replacement kit Calibration weights Milltronics flat bar calibration weights, see page 4/53. Note: calibration accessories should be ordered as a separate item on the order.	
Scale construction Standard for belt width up to 1 000 mm (42 inch), nickel plated steel load cells Heavy-duty for belt width up to 1 524 mm (60 inch), nickel plated steel load cells		1 2	A5E00826934 A5E00826935 A5E00826936 A5E00826938 A5E00826939	
Load cell capacity <u>Standard Duty Scale Load Cell</u> 20 kg (44.1 lb) ¹⁾ 30 kg (66.1 lb) ¹⁾ 50 kg (110.2 lb) ¹⁾ 75 kg (165.3 lb) ¹⁾ 100 kg (220.4 lb) ¹⁾ Not specified ²⁾ <u>Heavy-Duty Scale Load Cell</u> 50 kg (110.2 lb) ³⁾ 100 kg (220.4 lb) ³⁾ 150 kg (330.7 lb) ³⁾ 200 kg (440.9 lb) ³⁾ 300 kg (661.4 lb) ³⁾ 500 kg (1 102.3 lb) ³⁾		AA AB AC AD AE XX BA BB BC BD BE BF	A5E00826941 A5E00826942 A5E00826943 A5E00826944 A5E00826945 A5E00826946	
Fabrication C5-M rated polyester painted mild steel		1	7MH7723-1DM 7MH7723-1NA	
Further designs Please add "-Z" to article no. and specify order code(s). Stainless steel tag [69 x 38 mm (2.7 x 1.5 inch)], Measuring-point number / identification (max. 27 characters), specify in plain text. Application Eng. reference number (max. 15 characters), specify in plain text. Manufacturer's test certificate: According to EN 10204-2.2		Order Code Y15 Y31 C11		
Operating instructions All literature is available to download for free, in a range of languages, at http://www.siemens.com/weighing/documentation				

1) For use with scale construction option 1 only.
 2) Only for quotation purposes, not a valid ordering option.
 3) For use with scale construction option 2 only.

Belt Weighing

Belt scales


Milltronics MUS

Dimensional drawings

Standard duty

Belt direction for all flat or inclined conveyors


Side view

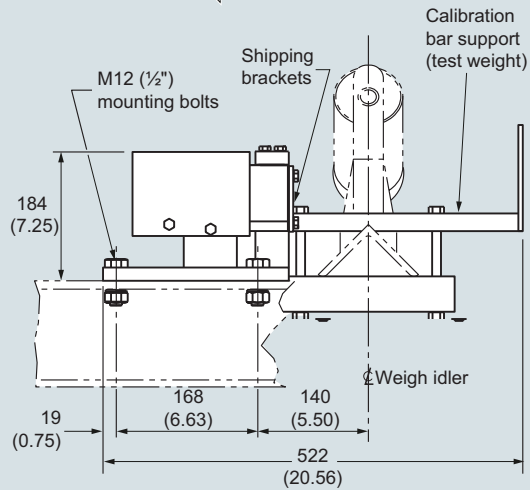

Note:

(2) approach and (2) retreat idlers should be aligned with the weigh idler to within 0.8 (+1/3) to 0 (0).


Front view

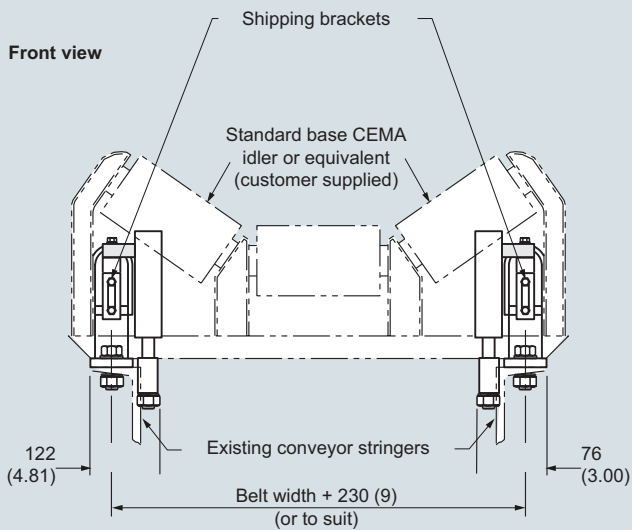

Heavy duty

Belt direction for all flat or inclined conveyors


Side view

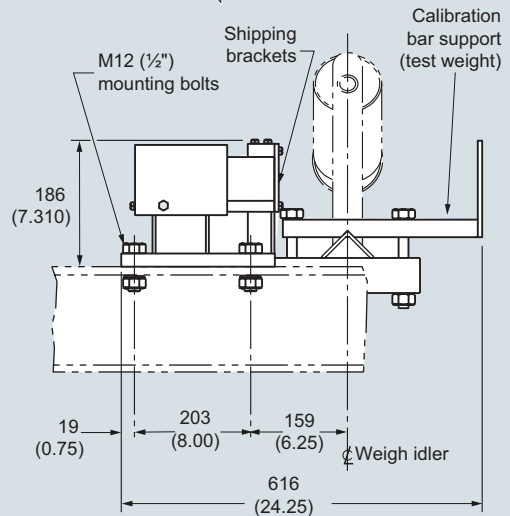

Note:

(2) approach and (2) retreat idlers should be aligned with the weigh idler to within 0.8 (+1/3) to 0 (0).

Front view

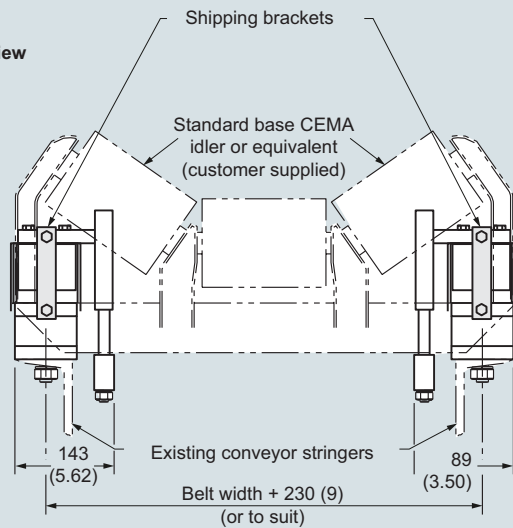


MUS, dimensions in mm (inch)

Belt Weighing

Belt scales

Milltronics MCS

Overview

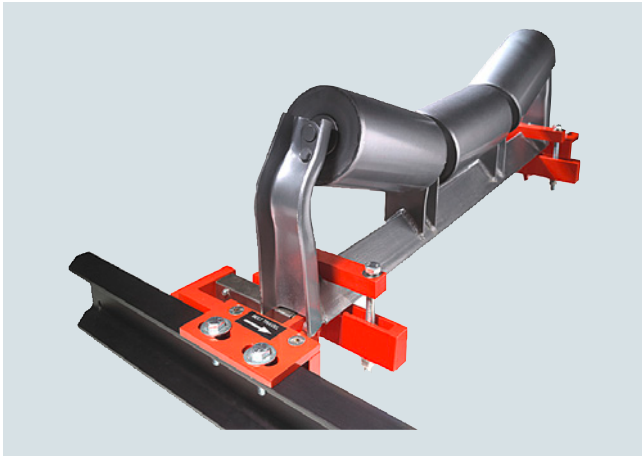

Milltronics MCS is a compact, rugged, modular, heavy-duty belt scale for use in mobile crushers and aggregate screening plants.

Idler not included with belt scale.

Application

Milltronics MCS provides continuous, in-line weighing at minimal cost. The stainless steel load cells ensure long-term, consistent, reliable measurement. The modular construction and easy assembly of the MCS ensures quick delivery to meet even the tightest of schedules.

Operating with Milltronics BW500, SIWAREX WT241, WP241, or FTC microprocessor-based integrators, the MCS provides indication of flow rate, total weight, belt load, and belt speed of bulk solids materials on a belt conveyor.

To complete the weighing system, include a speed sensor to monitor conveyor belt speed for input to the integrator. On mobile crushing equipment, the TASS speed sensor is a compact, rugged speed sensor designed for use with the MCS.

4

Benefits

- Rugged design
- Low profile
- Easy retrofit
- Low cost
- Stainless steel load cells

Technical specifications

Milltronics MCS	
Mode of operation	
Measuring principle	Strain gauge load cells measuring load on belt conveyor idlers
Typical application	Mobile crusher systems
Measurement accuracy	
Accuracy ¹⁾	<ul style="list-style-type: none"> • $\pm 0.5 \dots 1$ % of totalization over 25 ... 100 % operating range, application dependent • ± 2 % of totalization over 25 ... 100 % operating range on mobile crusher applications
Repeatability	± 0.1 %
Belt design	
Belt width	<ul style="list-style-type: none"> • Up to 1 600 mm (60 inch CEMA) width • Refer to the outline dimension section
Belt speed	Up to 4 m/s (800 fpm) ²⁾
Capacity	Up to 2 400 t/h (2 640 STPH) at maximum belt speed
Conveyor incline	<ul style="list-style-type: none"> • $\pm 20^\circ$ from horizontal, fixed incline • Up to $\pm 30^\circ$ with reduced accuracy³⁾
Idlers	
Idler profile	<ul style="list-style-type: none"> • Flat to 35° • To 45° with reduced accuracy³⁾
Idler diameter	100 ... 150 mm (4 ... 6 inch)
Idler spacing	0.6 ... 1.2 m (2.0 ... 4.0 ft)
Load cell	
Construction	17-4 PH (1.4568) stainless steel construction with 304 (1.4301) stainless steel cover Strain gauge protection: polybutadiene
Degree of protection	IP67, IP65 on hazardous approved models
Cable length	3 m (10 ft)
Excitation	10 V DC nominal, 15 V maximum
Output	2 mV/V excitation at rated load cell capacity
Non-linearity and hysteresis	0.02 % of rated output
Non-repeatability	0.01 % of rated output
Capacity	25, 50, 100, 250, 500 lb stainless steel
Overload	150 % of rated capacity, ultimate 300 % of rated capacity
Temperature	<ul style="list-style-type: none"> • $-50 \dots +75$ °C ($-58 \dots +167$ °F) operating range • $-40 \dots +65$ °C ($-40 \dots +150$ °F) compensated

Milltronics MCS	
Weight	Up to 20 kg (44 lb), 10 kg (22 lb) per side
Interconnection wiring (to integrator)	<ul style="list-style-type: none"> • < 150 m (500 ft) 18 AWG (0.75 mm²) 6 conductor shielded cable • > 150 m (500 ft) to 300 m (1 000 ft) 18 ... 22 AWG (0.75 ... 0.34 mm²), 8 conductor shielded cable
Approvals	<ul style="list-style-type: none"> • CSA/FM Class II, Div. 1, Groups E, F, G and Class III • ATEX II 2D, Ex tD A21 IP65 T90 °C • EAC Ex • IEC Ex, Ex tD A21 IP65 T90 °C • CE, RCM, EAC, KCC, RTN

¹⁾ Accuracy subject to: on factory approved installations the belt scale system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

²⁾ Contact Siemens application engineering (factorysupport.smpi@siemens.com) for consideration of higher belt speeds.

³⁾ Review by Siemens application engineer required.

Belt Weighing

Belt scales

Milltronics MCS

Selection and ordering data

Milltronics MCS belt scale

A compact, rugged, modular, heavy-duty belt scale for use in mining and aggregate screening plants

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Scale construction

Standard duty, CE, RCM, EAC, KCC

Hazardous Duty

CSA/FM Class II, Div. 1, Groups E, F, G and Class III, ATEX II 2D, IECEx, EAC Ex, CE, RCM, EAC, KCC

Load cell capacity

50 lb (22.7 kg) (use not recommended for mobile crushers)

100 lb (45.5 kg) (use not recommended for mobile crushers)

250 lb (113.6 kg)

500 lb (226.8 kg)

25 lb (11.3 kg) (use not recommended for mobile crushers)

Not specified¹⁾

Fabrication

C5-M rated polyester painted mild steel

C5-M rated polyester painted mild steel, for use with flat bar or MWL calibration

Further designs

Please add "-Z" to article no. and specify order code(s).

Stainless steel tag [69 x 38 mm (2.7 x 1.5 inch)], Measuring-point number / identification (max 27 characters), specify in plain text.

Application Eng. reference number (max. 15 characters), specify in plain text.

Manufacturer's test certificate: According to EN 10204-2.2

Operating instructions

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/weighing/documentation>

Article No.

7MH7125-

0

1

2

AA

AB

AC

AD

AE

BB

1

2

Order Code

Y15

Y31

C11

Article No.

Spare parts

Stainless steel load cell

[17-4 PH (1.4568) stainless steel construction with 304 (1.4301) stainless steel cover]

25 lb (11.3 kg)

A5E01673047

50 lb (22.7 kg)

A5E01135823

100 lb (45.4 kg)

A5E01135824

250 lb (113.4 kg)

A5E01135825

500 lb (226.8 kg)

A5E01135826

Calibration weights

Flat bar/MWL retrofit kit

7MH7723-1HA

Calibration test arm assembly, c/w one 8.2 kg (18 lb) calibration weight

7MH7723-1FR

Calibration test arm assembly, c/w two 8.2 kg (18 lb) calibration weights

7MH7723-1FS

MCS calibration arm c/w idler clip [holds up to two 8.2 kg (18 lb) weights]

7MH7726-1AD

Calibration weight, 18 lb (8.2 kg)

7MH7724-1AA


Calibration weight, 6 lb (2.7 kg)

7MH7724-1AB

Milltronics flat bar calibration weights, see page 4/53.

Note: calibration accessories should be ordered as a separate item on the order.

¹⁾ Only for quotation purposes, not a valid ordering option.

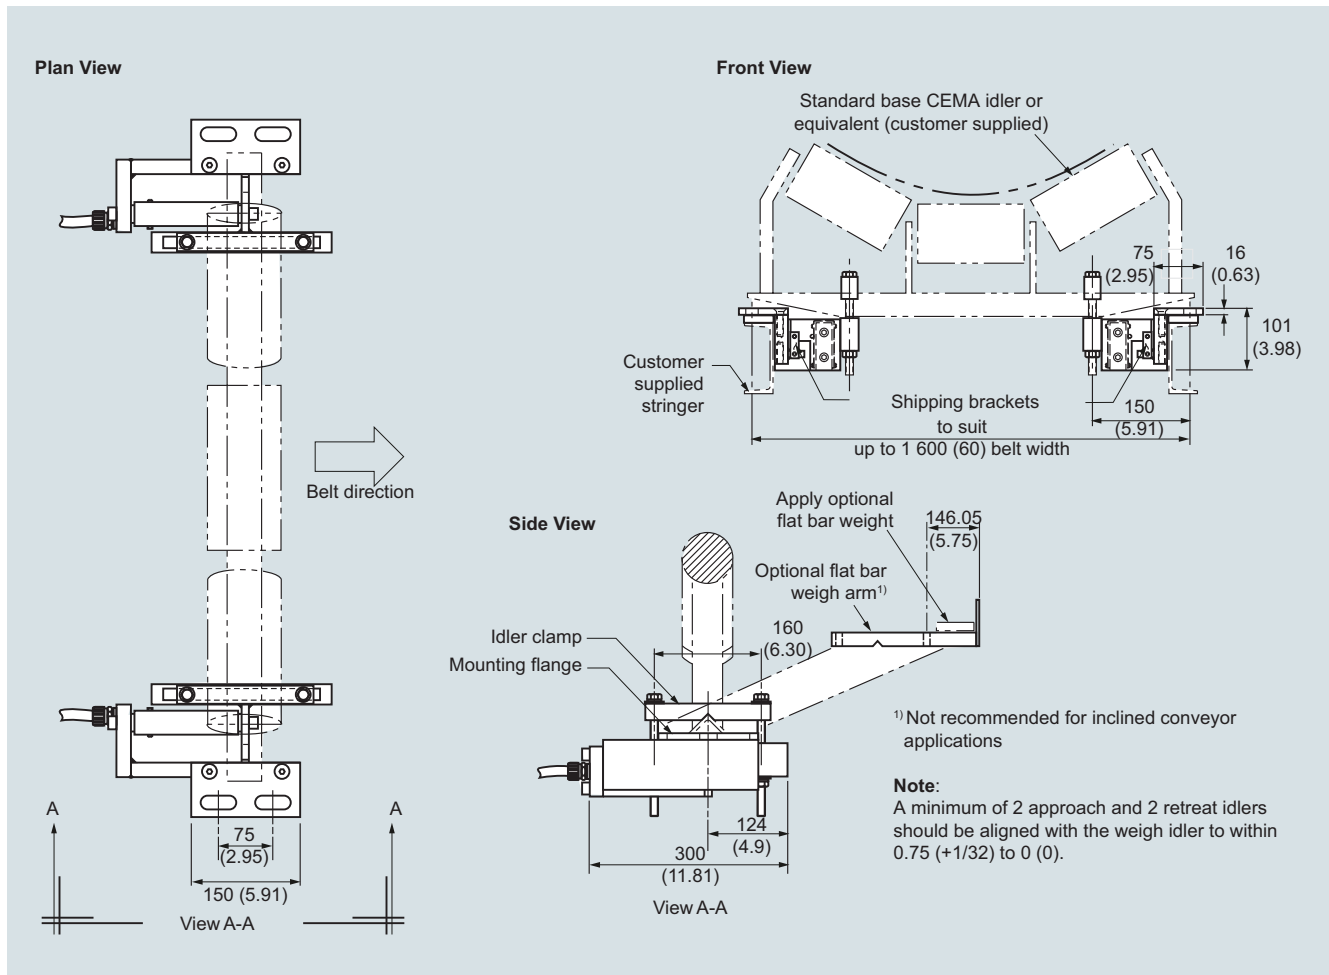Dimensional drawings


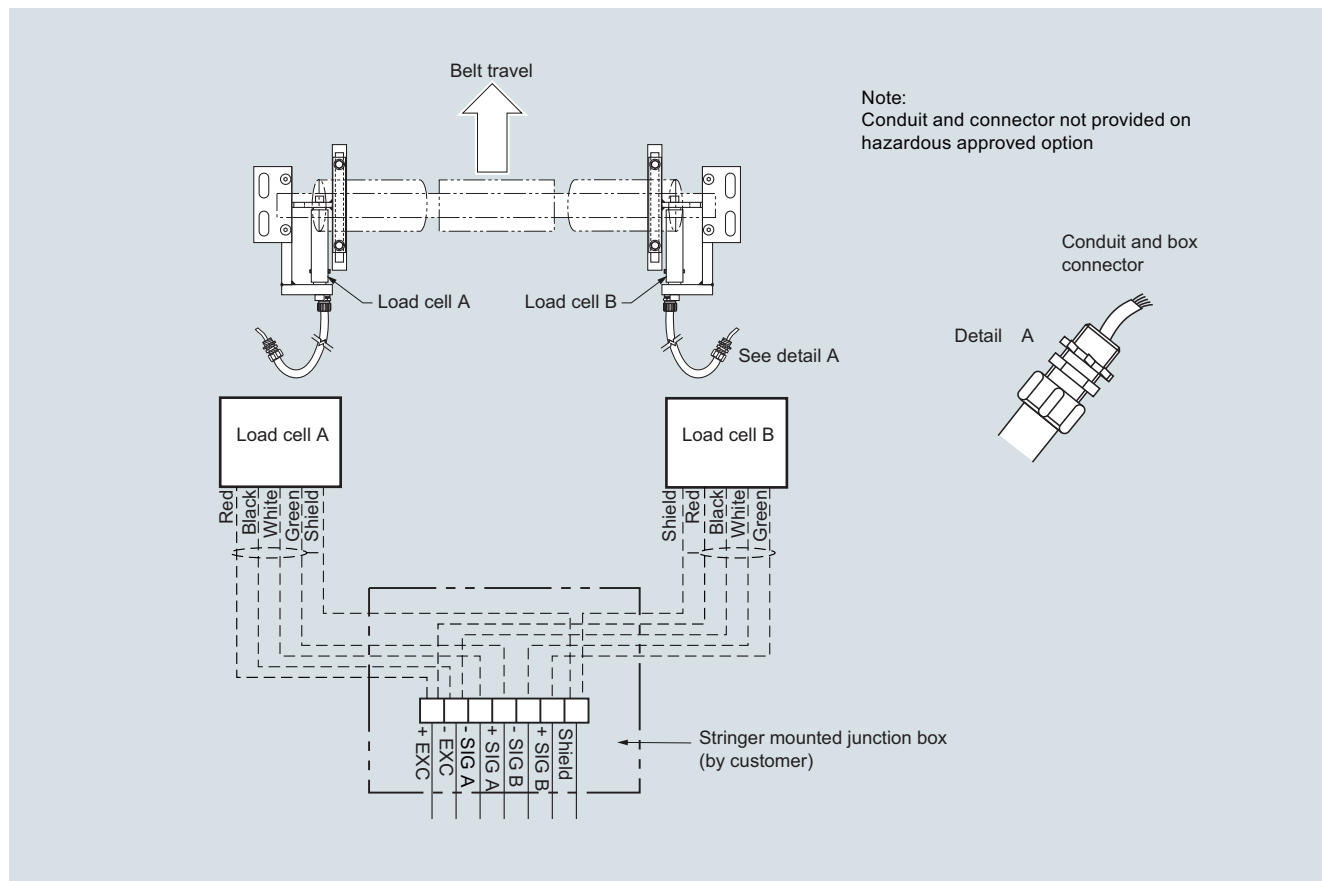
MCS, dimensions in mm (inch)

Belt Weighing

Belt scales

Milltronics MCS

Circuit diagrams



MCS connections

Overview



Milltronics MSI is a heavy-duty, high accuracy full-frame single idler belt scale used for process and load-out control. Idler not included with belt scale.



Milltronics MMI is a heavy-duty, high accuracy multiple idler belt scale used for critical process and load-out control. Idler not included with belt scale.

Benefits

Milltronics MSI belt scale

- Outstanding accuracy and repeatability
- Unique parallelogram style load cell design
- Fast reaction to product loading; capable of monitoring fast moving belts
- Rugged construction
- SABS approval (South Africa), OIML, MID, and Measurement Canada

Milltronics MMI belt scale

- Exceptional accuracy and repeatability
- Unique parallelogram style load cell design
- Suitable for uneven or light product loading
- Capable of monitoring fast moving belts
- Low cost of ownership
- NTEP, OIML, MID, and Measurement Canada approved

Application

Milltronics MSI belt scale

Milltronics MSI belt scale provides continuous in-line weighing on a variety of products in primary and secondary industries. It is proven in a wide range of tough applications from extraction (in mines, quarries and pits), to power generation, iron and steel, food processing and chemicals. The MSI is suitable for monitoring such diverse products as sand, flour, coal, or sugar.

The MSI's proven use of parallelogram-style load cells results in fast reaction to vertical forces, ensuring instant response to product loading. This enables it to provide outstanding accuracy and repeatability even with uneven loading and fast belt speeds.

Operating with Milltronics BW500, SIWAREX WT241, WP241, or FTC microprocessor-based integrators, the MSI provides indication of flow rate, totalized weight, belt load, and belt speed of bulk solid materials. A speed sensor monitors conveyor belt speed for input to the integrator.

The MSI is installed in a simple drop-in operation and may be secured with just four bolts. An existing idler is then attached to the MSI dynamic beam. With no moving parts, maintenance is kept to a minimum, with just periodic calibration checks required.

Milltronics MMI belt scale

Milltronics MMI belt scale consists of two or more MSI single idler belt scales installed in series. It provides high accuracy continuous in-line weighing on a variety of products in primary and secondary industries. The MMI system is proven in a wide range of tough applications from extraction to power generation, iron and steel, food processing and chemicals. The MMI is suitable for monitoring such diverse products as fertilizer, sand, grain, flour, coal, or sugar.

The MMI's proven use of parallelogram-style load cells results in fast reaction to vertical forces, ensuring instant response to product loading. This enables it to provide outstanding accuracy and repeatability even with uneven or light loading, short idler spacing and fast belt speeds. Operating with Milltronics BW500 integrator (for custody transfer applications), the MMI provides indication of flow rate, total weight, belt load and belt speed of bulk solids materials on a belt conveyor. A speed sensor monitors conveyor belt speed for input to the integrator.

The MMI is installed in a simple drop-in operation and may be secured with just eight bolts and existing idler sets, secured to the dynamic beam. With no moving parts, maintenance is kept to a minimum, with just periodic calibration checks required.

Belt Weighing

Belt scales


Milltronics MSI and MMI

Design

Mounting

Note:

Conduit and cable arrangement may differ from example shown

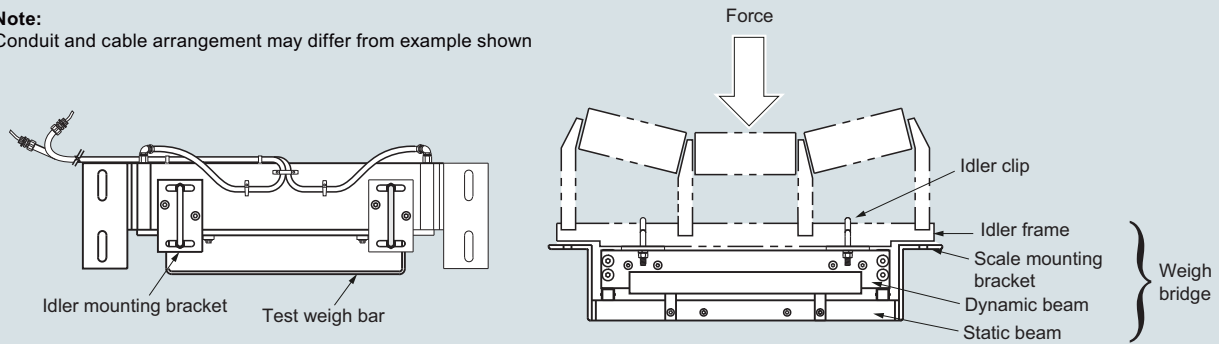


MSI/MMI mounting

Applications with 2 MSIs (MMI-2)

450 ... 1 525 mm (18 ... 60 inch) idler spacing


Belt travel →



Applications with 3 MSIs (MMI-3)

450 ... 1 525 mm (18 ... 60 inch) idler spacing

Belt travel →



Mounting (two or more MSI units)

Technical specifications

Milltronics MSI/MMI	
Mode of operation	
Measuring principle	Strain gauge load cells measuring load on belt conveyor idler(s)
Typical application	
• MSI	Control in fractionated stone blending tunnels
• MMI	Custody transfer
Measurement accuracy	
Accuracy ¹⁾	
• MSI	± 0.5 % or better of totalization over 20 ... 100 % operating range
• MMI-2 (2 idler)	± 0.25 % or better of totalization over 20 ... 100 % operating range
• MMI-3 (3 idler)	± 0.125 % or better of totalization over 25 ... 100 % operating range
Note: available with system specification option D only	
Repeatability	± 0.1 %
Medium conditions	
Material temperature	-50 ... +200 °C (-58 ... +392 °F)
Belt design	
Belt width	<ul style="list-style-type: none"> • 18 ... 96 inch in CEMA sizes • Equivalent to 500 ... 2 000 mm in metric size • Refer to dimensions section
Belt speed	Up to 5 m/s (1 000 fpm) ²⁾
Capacity	
	Up to 12 000 t/h (13 200 STPH) at maximum belt speed. Please contact a Siemens representative for higher rates.
Conveyor incline	
	<ul style="list-style-type: none"> • ± 20° from horizontal, fixed incline • Up to ± 30° with reduced accuracy³⁾
Idlers	
Idler profile	<ul style="list-style-type: none"> • Flat to 35° • Up to 45° with reduced accuracy³⁾
Idler diameter	50 ... 180 mm (2 ... 7 inch)
Idler spacing	0.5 ... 1.5 m (1.5 ... 5.0 ft)

Milltronics MSI/MMI	
Load cell	
Construction	Stainless steel construction with 304 (1.4301) stainless steel cover Strain gauge protection: polybutadiene
Degree of protection	IP67, IP65 on hazardous approved models
Cable length	3 m (10 ft) Note: to calculate installation cable length subtract 3 048 mm (120 inch) from the "A" dimension
Excitation	10 V DC nominal, 15 V DC maximum
Output	2 ± 0.002 mV/V excitation (nominal) at rated load cell capacity
Non-linearity and hysteresis	0.02 % of rated output
Non-repeatability	0.01 % of rated output
Capacity	
• Maximum ranges	25, 50, 100, 250, 500, 750, 1 000, 1 250, 1 500, 2 000 lb
Overload	150 % of rated capacity, ultimate 300 % of rated capacity
Temperature	<ul style="list-style-type: none"> • -50 ... +75 °C (-58 ... +167 °F) operating range, optional -50 ... +175 °C (-58 ... 347 °F) • -40 ... +65 °C (-40 ... +150 °F) compensated • -10 ... +40 °C (14 ... 104 °F) compensated on trade approved versions
Weight	
	See dimensions section
Interconnection wiring (to integrator, per MSI)	
	< 150 m (500 ft) 18 AWG (0.75 mm ²) 6 conductor shielded cable > 150 m ... 300 m (500 ft ... 1 000 ft) 18 ... 22 AWG (0.75 ... 0.34 mm ²), 8 conductor shielded cable
Approvals	
	<ul style="list-style-type: none"> • CSA/FM Class I, Div. 1, Groups A, B, C, Class II, Div. 1, Groups E, F, G, and Class III • ATEX II 1GD, Ex ia IIC T4 Ga, Ex ia IIIC T135 °C Da, ATEX I M1, Ex ia I Ma • ATEX II 2D Ex tD A21 IP65 T90 °C • EAC Ex • IEC Ex 1G Ex ia IIC T4 Ga, Ex ia IIIC T135 °C Da M1, Ex ia I Ma • MSHA • CE, RCM, EAC, KCC, CMC, RTN
Metrology approvals	
	Measurement Canada, MID, OIML, SABS ⁴⁾ , NTEP ⁵⁾ , STAMEQ, GOST

¹⁾ Accuracy subject to: on factory approved installations the belt scale system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

²⁾ Contact Siemens application engineering (factorysupport.smpi@siemens.com) for consideration of higher belt speeds.

³⁾ Review by Siemens application engineer required.

⁴⁾ MSI only.

⁵⁾ MMI only.

Belt Weighing

Belt scales

Milltronics MSI and MMI

Selection and ordering data

Milltronics MSI belt scale

A heavy-duty, high-accuracy single idler belt scale for process and load-out control. For Milltronics MMI belt scale system, two or more MSI belt scales are required. Calibration weights are required and ordered as separate items.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Scale construction

Standard duty, CE, RCM, EAC, KCC

Hazardous Duty

CSA/FM Class II, Div. 1, Groups E, F, G and Class III, ATEX II 2D, EAC Ex, IECEx, CE, RCM

CSA/FM Class I, Div. 1, Groups A, B, C, D, Class II, Div. 1, Groups E, F, G and Class III, ATEX II 1GD IEC Ex 1GD

MSHA, ATEX I M1, IEC Ex I M1

Belt width and 'A' dimension

18 inch, 'A' = 27 inch (686 mm)	AA
19 inch, 'A' = 28 inch (711 mm)	AB
20 inch, 'A' = 29 inch (737 mm)	AC
21 inch, 'A' = 30 inch (762 mm)	AD
22 inch, 'A' = 31 inch (787 mm)	AE
23 inch, 'A' = 32 inch (813 mm)	AF
24 inch, 'A' = 33 inch (838 mm)	AG
25 inch, 'A' = 34 inch (864 mm)	AH
26 inch, 'A' = 35 inch (889 mm)	AJ
27 inch, 'A' = 36 inch (914 mm)	AK
28 inch, 'A' = 37 inch (940 mm)	AL
29 inch, 'A' = 38 inch (965 mm)	AM
30 inch, 'A' = 39 inch (991 mm)	AN
31 inch, 'A' = 40 inch (1 016 mm)	AP
32 inch, 'A' = 41 inch (1 041 mm)	AQ
33 inch, 'A' = 42 inch (1 067 mm)	AR
34 inch, 'A' = 43 inch (1 092 mm)	AS
35 inch, 'A' = 44 inch (1 118 mm)	AT
36 inch, 'A' = 45 inch (1 143 mm)	AU
37 inch, 'A' = 46 inch (1 168 mm)	AV
38 inch, 'A' = 47 inch (1 194 mm)	AW
39 inch, 'A' = 48 inch (1 219 mm)	BA
40 inch, 'A' = 49 inch (1 245 mm)	BB
41 inch, 'A' = 50 inch (1 270 mm)	BC
42 inch, 'A' = 51 inch (1 295 mm)	BD
43 inch, 'A' = 52 inch (1 321 mm)	BE
44 inch, 'A' = 53 inch (1 346 mm)	BF
45 inch, 'A' = 54 inch (1 372 mm)	BG
46 inch, 'A' = 55 inch (1 397 mm)	BH
47 inch, 'A' = 56 inch (1 422 mm)	BJ
48 inch, 'A' = 57 inch (1 448 mm)	BK
49 inch, 'A' = 58 inch (1 473 mm)	BL
50 inch, 'A' = 59 inch (1 499 mm)	BM
51 inch, 'A' = 60 inch (1 524 mm)	BN
52 inch, 'A' = 61 inch (1 549 mm)	BP
53 inch, 'A' = 62 inch (1 575 mm)	BQ
54 inch, 'A' = 63 inch (1 600 mm)	BR

Article No.

7MH7122-

Milltronics MSI belt scale

A heavy-duty, high-accuracy single idler belt scale for process and load-out control. For Milltronics MMI belt scale system, two or more MSI belt scales are required. Calibration weights are required and ordered as separate items.

55 inch, 'A' = 64 inch (1 626 mm)	BS
56 inch, 'A' = 65 inch (1 651 mm)	BT
57 inch, 'A' = 66 inch (1 676 mm)	BU
58 inch, 'A' = 67 inch (1 702 mm)	BV
59 inch, 'A' = 68 inch (1 727 mm)	BW
60 inch, 'A' = 69 inch (1 753 mm)	CA
61 inch, 'A' = 70 inch (1 778 mm)	CB
62 inch, 'A' = 71 inch (1 803 mm)	CC
63 inch, 'A' = 72 inch (1 829 mm)	CD
64 inch, 'A' = 73 inch (1 854 mm)	CE
65 inch, 'A' = 74 inch (1 880 mm)	CF
66 inch, 'A' = 75 inch (1 905 mm)	CG
67 inch, 'A' = 76 inch (1 930 mm)	CH
68 inch, 'A' = 77 inch (1 956 mm)	CJ
69 inch, 'A' = 78 inch (1 981 mm)	CK
70 inch, 'A' = 79 inch (2 007 mm)	CL
71 inch, 'A' = 80 inch (2 032 mm)	CM
72 inch, 'A' = 81 inch (2 057 mm)	CN
73 inch, 'A' = 82 inch (2 083 mm)	CP
74 inch, 'A' = 83 inch (2 108 mm)	CQ
75 inch, 'A' = 84 inch (2 134 mm)	CR
76 inch, 'A' = 85 inch (2 159 mm)	CS
77 inch, 'A' = 86 inch (2 184 mm)	CT
78 inch, 'A' = 87 inch (2 210 mm)	CU
79 inch, 'A' = 88 inch (2 235 mm)	CV
80 inch, 'A' = 89 inch (2 261 mm)	CW
81 inch, 'A' = 90 inch (2 286 mm)	DA
82 inch, 'A' = 91 inch (2 311 mm)	DB
83 inch, 'A' = 92 inch (2 337 mm)	DC
84 inch, 'A' = 93 inch (2 362 mm)	DD
85 inch, 'A' = 94 inch (2 388 mm)	DE
86 inch, 'A' = 95 inch (2 413 mm)	DF
87 inch, 'A' = 96 inch (2 438 mm)	DG
88 inch, 'A' = 97 inch (2 464 mm)	DH
89 inch, 'A' = 98 inch (2 489 mm)	DJ
90 inch, 'A' = 99 inch (2 515 mm)	DK
91 inch, 'A' = 100 inch (2 540 mm)	DL
92 inch, 'A' = 101 inch (2 565 mm)	DM
93 inch, 'A' = 102 inch (2 591 mm)	DN
94 inch, 'A' = 103 inch (2 616 mm)	DP
95 inch, 'A' = 104 inch (2 642 mm)	DQ
96 inch, 'A' = 105 inch (2 667 mm)	DR

Article No.

7MH7122-

Belt Weighing

Belt scales

Milltronics MSI and MMI

Selection and ordering data

Article No.

Article No.

Spare parts

Flat bar/MWL retrofit kit

7MH7723-1FW

Conduit replacement kit

7MH7723-1NA

FDA conduit replacement kit

7MH7723-1QL

MWL calibration weight support brackets
galvanized

7MH7723-1JT

Stainless steel load cells

Standard load cell with 304 (1.4301) stainless steel
cover

25 lb (11.3 kg)

A5E35801457

50 lb (22.7 kg)

PBD-23900246

100 lb (45.4 kg)

PBD-23900247

250 lb (113.4 kg)

PBD-23900248

500 lb (226.8 kg)

PBD-23900249

750 lb (340.2 kg)

PBD-23900250

1 000 lb (453.6 kg)

PBD-23900251

1 250 lb (567 kg)

A5E02235671

1 500 lb (680.4 kg)

A5E02239623

2 000 lb (907.2 kg)

A5E35801460

25 lb (11.3 kg), NTEP, OIML/MID

A5E35801462

50 lb (22.7 kg), NTEP, OIML/MID

A5E03324790

100 lb (45.4 kg), NTEP, OIML/MID

PBD-23900261

250 lb (113.4 kg), NTEP, OIML/MID

PBD-23900262

500 lb (226.8 kg), NTEP, OIML/MID

PBD-23900263

750 lb (340.2 kg), NTEP, OIML/MID

PBD-23900264

1 000 lb (453.6 kg), NTEP, OIML/MID

PBD-23900265

1 250 lb (567 kg), NTEP, OIML/MID

A5E02235672

1 500 lb (680.4 kg), NTEP, OIML/MID

A5E02239620

2 000 lb (907.2 kg), NTEP, OIML/MID

A5E35801463

Load cell with 316 (1.4401) stainless steel cover

25 lb (11.3 kg)

PBD-25851-A8H53

50 lb (22.7 kg)

PBD-25851-A0H53

100 lb (45.4 kg)

PBD-25851-A1H53

250 lb (113.4 kg)

PBD-25851-A2H53

500 lb (226.8 kg)

PBD-25851-A3H53

750 lb (340.2 kg)

PBD-25851-A4H53

1 000 lb (453.6 kg)

PBD-25851-A5H53

1 250 lb (567 kg)

PBD-25851-A6H53

1 500 lb (680.4 kg)

PBD-25851-A7H53

2 000 lb (907.2 kg)

PBD-25851-A9H53

100 lb (45.4 kg), NTEP, OIML/MID

PBD-25851-B1H53

250 lb (113.4 kg), NTEP, OIML/MID

PBD-25851-B2H53

500 lb (226.8 kg), NTEP, OIML/MID

PBD-25851-B3H53

750 lb (340.2 kg), NTEP, OIML/MID

PBD-25851-B4H53

1 000 lb (453.6 kg), NTEP, OIML/MID

PBD-25851-B5H53

Load cell, high temperature up to 175 °C (347 °F)

25 lb (11.3 kg)

PBD-25851-A8T50

50 lb (22.7 kg)

PBD-25851-A0T50

100 lb (45.4 kg)

PBD-25851-A1T50

250 lb (113.4 kg)

PBD-25851-A2T50

500 lb (226.8 kg)

PBD-25851-A3T50

750 lb (340.2 kg)

PBD-25851-A4T50

1 000 lb (453.6 kg)

PBD-25851-A5T50

1 250 lb (567 kg)

PBD-25851-A6T50

1 500 lb (680.4 kg)

PBD-25851-A7T50

2 000 lb (907.2 kg)

PBD-25851-A9T50

Load cell, high temperature up to 175 °C (347 °F) with 316 (1.4401) stainless steel cover

25 lb (11.3 kg)

PBD-25851-A8TH

50 lb (22.7 kg)

PBD-25851-A0TH

100 lb (45.4 kg)

PBD-25851-A1TH

250 lb (113.4 kg)

PBD-25851-A2TH

500 lb (226.8 kg)

PBD-25851-A3TH

750 lb (340.2 kg)

PBD-25851-A4TH

1 000 lb (453.6 kg)

PBD-25851-A5TH

1 250 lb (567 kg)

PBD-25851-A6TH

1 500 lb (680.4 kg)

PBD-25851-A7TH

2 000 lb (907.2 kg)

PBH-25851-A9TH

Load cell with 15 m (49.2 ft) cable length

25 lb (11.3 kg)

PBD-25851-A8A08

50 lb (22.7 kg)

PBD-25851-A0A08

100 lb (45.4 kg)

PBD-25851-A1A08

250 lb (113.4 kg)

PBD-25851-A2A08

500 lb (226.8 kg)

PBD-25851-A3A08

750 lb (340.2 kg)

PBD-25851-A4A08

1 000 lb (453.6 kg)

PBD-25851-A5A08

1 250 lb (567 kg)

PBD-25851-A6A08

1 500 lb (680.4 kg)

PBD-25851-A7A08

2 000 lb (907.2 kg)

PBD-25851-A9A08

100 lb (45.4 kg), NTEP, OIML/MID

PBD-25851-B1A08

250 lb (113.4 kg), NTEP, OIML/MID

PBD-25851-B2A08

500 lb (226.8 kg), NTEP, OIML/MID

PBD-25851-B3A08

750 lb (340.2 kg), NTEP, OIML/MID

PBD-25851-B4A08

1 000 lb (45.4 kg), NTEP, OIML/MID

PBD-25851-B5A08

Load cell with 15 m (49.2 ft) cable length and 316 (1.4401) stainless steel cover

25 lb (11.3 kg)

PBD-25851-A8AH

50 lb (22.7 kg)

PBD-25851-A0AH

100 lb (45.4 kg)

PBD-25851-A1AH

250 lb (113.4 kg)

PBD-25851-A2AH

500 lb (226.8 kg)

PBD-25851-A3AH

750 lb (340.2 kg)

PBD-25851-A4AH

1 000 lb (453.6 kg)

PBD-25851-A5AH

Selection and ordering data	Article No.		Article No.
1 250 lb (567 kg)	PBD-25851-A6AH	<i>Idler clips</i>	
1 500 lb (680.4 kg)	PBD-25851-A7AH	5 inch (127 mm) for 27 ... 62 inch (686 ... 1 575 mm) "A" dimensions	7MH7723-1BT
2 000 lb (907.2 kg)	PBD-25851-A9AH	7 inch (178 mm) for 63 ... 74 inch (1 600 ... 1 880 mm) "A" dimensions	7MH7723-1DF
100 lb (45.4 kg), NTEP, OIML/MID	PBD-25851-B1AH	<i>Calibration weights</i>	
250 lb (113.4 kg), NTEP, OIML/MID	PBD-25851-B2AH	6.0 lb/ 2.7 kg	7MH7724-1AB
500 lb (226.8 kg), NTEP, OIML/MID	PBD-25851-B3AH	18 lb/ 8.2 kg	7MH7724-1AA
750 lb (340.2 kg), NTEP, OIML/MID	PBD-25851-B4AH	18 lb/ 8.2 kg certified weight	A5E32423812
1 000 lb (453.6 kg), NTEP, OIML/MID	PBD-25851-B5AH	Milltronics flat bar calibration weights, see page 4/53	
<u>Load cell, high temperature up to 175 °C (347 °F) with 15 m (49.2 ft) cable length</u>		Note: calibration accessories should be ordered as a separate line order	
25 lb (11.3 kg)	PBD-25851-A8TA		
50 lb (22.7 kg)	PBD-25851-A0TA		
100 lb (45.4 kg)	PBD-25851-A1TA		
250 lb (113.4 kg)	PBD-25851-A2TA		
500 lb (226.8 kg)	PBD-25851-A3TA		
750 lb (340.2 kg)	PBD-25851-A4TA		
1 000 lb (453.6 kg)	PBD-25851-A5TA		
1 250 lb (567 kg)	PBD-25851-A6TA		
1 500 lb (680.4 kg)	PBD-25851-A7TA		
2 000 lb (907.2 kg)	PBD-25851-A9TA		
<u>Load cell, high temperature up to 175 °C (347 °F) with 15 m (49.2 ft) cable length and 316 (1.4401) stainless steel cover</u>			
25 lb (11.3 kg)	PBD-25851-A8AHT		
50 lb (22.7 kg)	PBD-25851-A0AHT		
100 lb (45.4 kg)	PBD-25851-A1AHT		
250 lb (113.4 kg)	PBD-25851-A2AHT		
500 lb (226.8 kg)	PBD-25851-A3AHT		
750 lb (340.2 kg)	PBD-25851-A4AHT		
1 000 lb (453.6 kg)	PBD-25851-A5AHT		
1 250 lb (567 kg)	PBD-25851-A6AHT		
1 500 lb (680.4 kg)	PBD-25851-A7AHT		
2 000 lb (907.2 kg)	PBD-25851-A9AHT		


- 1) Only for quotation purposes, not a valid ordering option.
- 2) Available with Fabrication options 11 ... 18 and 41 ... 48 only, and with System specification option A only.
- 3) Two MSI are required to make the NTEP approved MMI.
- 4) Approval available with load cell options 2 ... 6 only and applicable BW500.
- 5) Complete specification data sheet on page 4/27 and submit with order "legal for trade" version.
- 6) Includes metrological approved load cells.
- 7) Not available with construction option 2, or system specification options B, C, D.

Belt Weighing

Belt scales

Milltronics MSI and MMI

Dimensional drawings

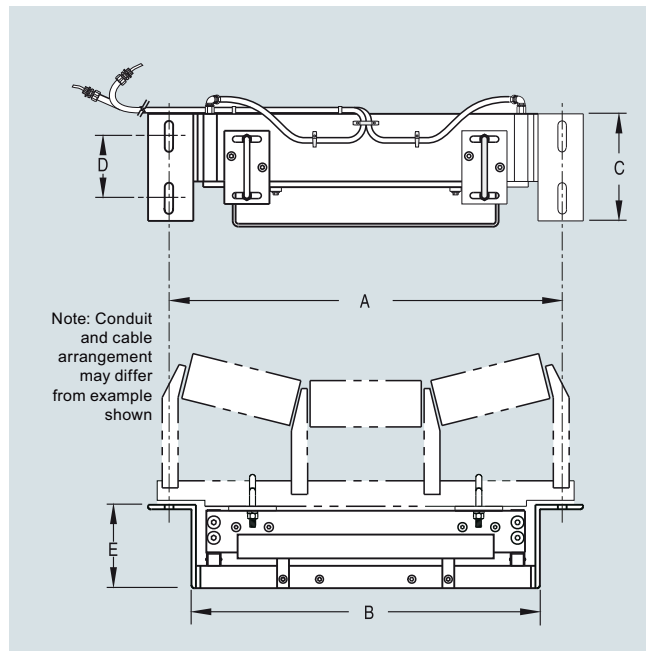


MSI dimensions

Conveyor belt width	Mounting scale width A	Minimum drop-in width B	C	D	E	Weight (approx.)
18 inch (457 mm)	27 inch (686 mm)	23.25 inch (591 mm)	9.5 inch (241 mm)	5.5 inch (140 mm)	7 inch (178 mm)	82 lb (37 kg)
20 inch (508 mm)	29 inch (737 mm)	25.25 inch (641 mm)	9.5 inch (241 mm)	5.5 inch (140 mm)	7 inch (178 mm)	85 lb (39 kg)
24 inch (610 mm)	33 inch (838 mm)	29.25 inch (743 mm)	9.5 inch (241 mm)	5.5 inch (140 mm)	7 inch (178 mm)	90 lb (41 kg)
30 inch (762 mm)	39 inch (991 mm)	35.25 inch (895 mm)	9.5 inch (241 mm)	5.5 inch (140 mm)	7 inch (178 mm)	99 lb (45 kg)
36 inch (914 mm)	45 inch (1 143 mm)	41.25 inch (1 048 mm)	9.5 inch (241 mm)	5.5 inch (140 mm)	7 inch (178 mm)	107 lb (49 kg)
42 inch (1 067 mm)	51 inch (1 295 mm)	47.25 inch (1 200 mm)	9.5 inch (241 mm)	5.5 inch (140 mm)	7 inch (178 mm)	116 lb (53 kg)
48 inch (1 219 mm)	57 inch (1 448 mm)	53.25 inch (1 353 mm)	9.5 inch (241 mm)	5.5 inch (140 mm)	7 inch (178 mm)	125 lb (57 kg)
54 inch (1 372 mm)	63 inch (1 600 mm)	59.25 inch (1 505 mm)	12 inch (305 mm)	8 inch (203 mm)	7 inch (178 mm)	175 lb (79 kg)
60 inch (1 524 mm)	69 inch (1 753 mm)	65.25 inch (1 657 mm)	12 inch (305 mm)	8 inch (203 mm)	7 inch (178 mm)	193 lb (88 kg)
66 inch (1 676 mm)	75 inch (1 905 mm)	71.25 inch (1 810 mm)	12 inch (305 mm)	8 inch (203 mm)	8 inch (203 mm)	229 lb (104 kg)
72 inch (1 829 mm)	81 inch (2 057 mm)	77.25 inch (1 962 mm)	12 inch (305 mm)	8 inch (203 mm)	8 inch (203 mm)	247 lb (112 kg)

Other widths available - check configuration information.
 Sizes are from 18 inch (457 mm) to 96 inch (2 438 mm) in 1 inch (25.4 mm) increments.
 All sizes are nominal.

Note: dimension B must be approx. 3/8 inch or 10 mm less than Y dimension of the conveyor
 (see Application Questionnaire at <http://www.siemens.com/weighing/application-questionnaires>)

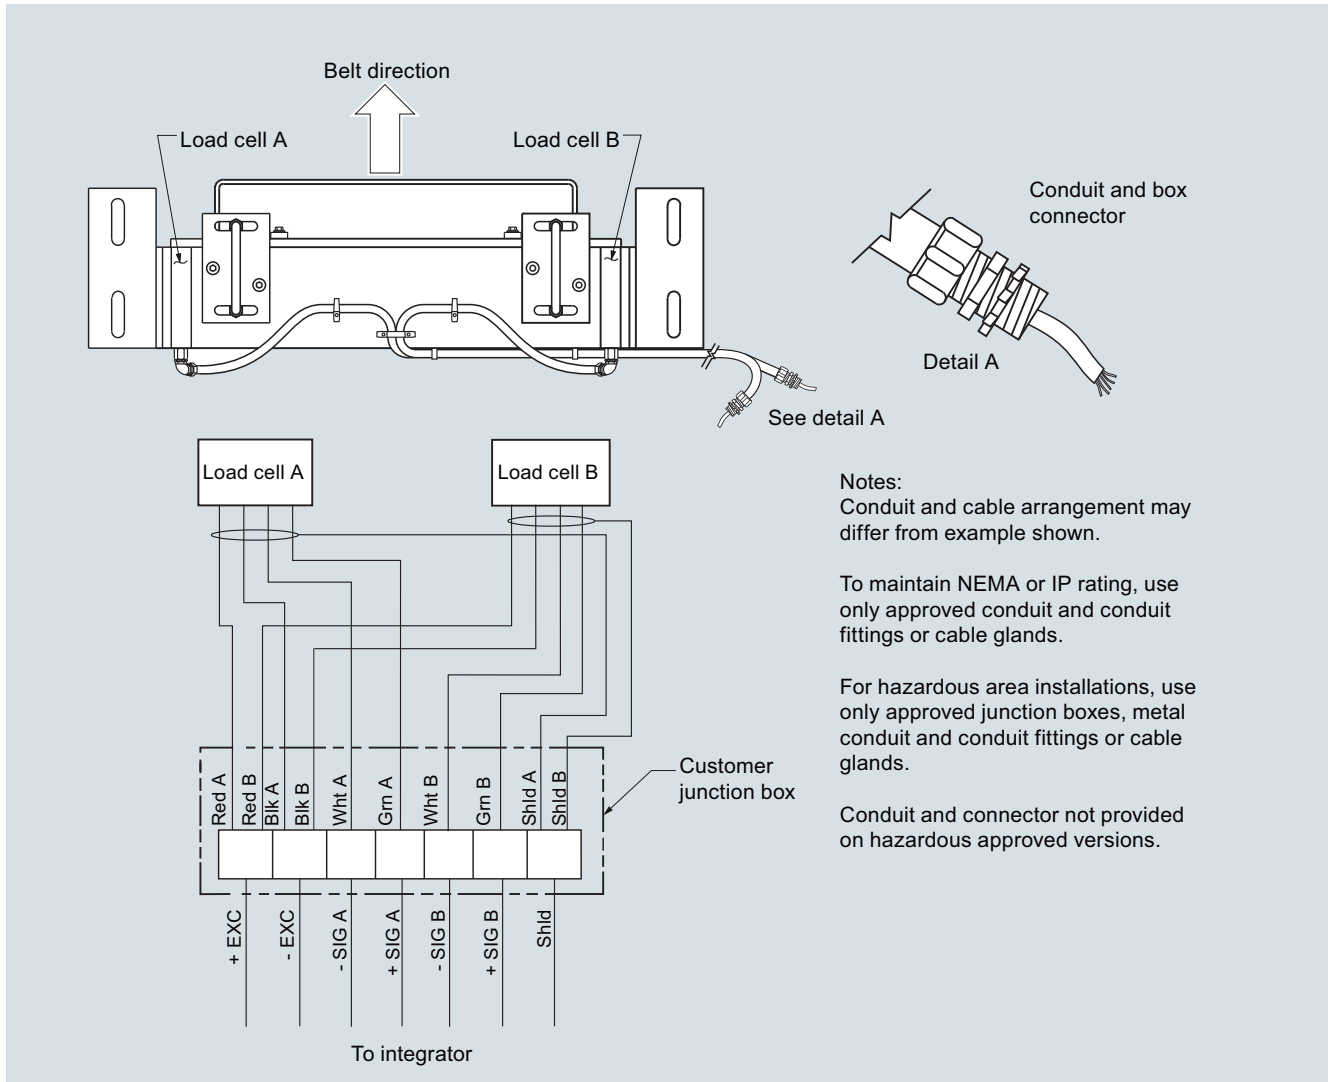Circuit diagrams


MSI/MMI connections

More information
NTEP/Measurement Canada/OIML & MID Specification Data

Please complete and submit the relevant details listed below when ordering NTEP, Measurement Canada, or OIML & MID approval options	Value
NTEP	
Maximum rated capacity (TPH)	
Minimum rated capacity (TPH)	
Belt speed (FPM)	
Scale division (tons)	
Maximum loading (lb/ft)	
Measurement Canada	
Rate	
Speed (min/max m/s, FPM)	
Test load (kg/m, lb/ft)	

Please complete and submit the relevant details listed below when ordering NTEP, Measurement Canada, or OIML & MID approval options	Value
OIML & MID	
Totalization scale interval (tonnes)	
Belt speed max/min (m/s)	
Maximum flow rate (MTPH)	
Minimum flow rate (MTPH)	
Minimum totalized load (tonnes)	
Product to be weighed	
Maximum capacity (tonnes)	
Weigh length (m)	
Ratio between minimum net load and maximum capacity	
Zero testing should have a duration of at least (____) revolutions	

Belt Weighing

Belt scales

Milltronics WD600

Overview



Milltronics WD600 is a light- to medium-duty slider bed belt scale used for process and load-out control in manufacturing, including the food, pharmaceutical and tobacco industries.

Benefits

- Simple installation
- Long weigh span for more retention time on load cells

Application

WD600 belt scale works with an existing flat belt conveyor and the selected Siemens integrator. As material is moving along the conveyor belt and travels over the belt scale, it exerts a force proportional to the material load through the suspended weigh-bridge to the load cells.

WD600 belt scale reacts only to the vertical component of the applied force. The resulting movement in each load cell is sensed by its strain gauges. When the strain gauges are excited by voltage from the electronic integrator, they produce an electrical signal proportional to weight, which is then applied to the integrator.

The vertical movement of the load cells is limited by the positive overload stop incorporated into the design of the load cell mount.

Technical specifications

Milltronics WD600	
Accuracy¹⁾	± 0.5 ... 1 % totalization over 25 ... 100 % operating range, application dependent
Repeatability	± 0.1 %
Belt width	12, 18, 24, 30, 36, 42, 48 inch (300, 450, 600, 750, 900, 1 000, 1 200 mm)
Belt speed	2.0 m/s (400 fpm) maximum ²⁾
Capacity	Up to 100 t/h
Conveyor incline	<ul style="list-style-type: none"> • ± 20° from horizontal, fixed incline • Up to ± 30° with reduced accuracy³⁾
Conveyor idler/slider profile	Horizontal
Loading	<ul style="list-style-type: none"> • Minimum 1.0 kg/m (0.6 lb/ft) • Maximum 76 kg/m (51 lb/ft)
Load cell	
Construction	17-4 PH (1.4568) stainless steel or nickel plated alloy steel Strain gauge protection: silicon (nickel plated version only)
Degree of protection	<ul style="list-style-type: none"> • Stainless steel: IP68 • Nickel plated alloy steel: IP66
Cable length	3 m (10 ft)
Excitation	10 V DC nominal, 15 V DC maximum
Output	2 mV/V
Non-linearity	0.02 % of rated output
Non-repeatability	0.01 % of rated output
Capacity	Stainless steel range: 6, 12, 30 kg Nickel-plated range: 10, 15, 20, 30, 50 kg
Overload	150 % of rated capacity
Temperature	<ul style="list-style-type: none"> • -40 ... +65 °C (-40 ... +149 °F) operating range • -10 ... +40 °C (14 ... 104 °F) compensated
Scale construction	<ul style="list-style-type: none"> • Stainless steel construction, bead blast finish (1 ... 6 µm, 40 ... 240 µin) • Acetal sliders
Hazardous locations	Consult the factory
Approvals	CE, meets FDA/USDA requirements for food processing, RCM, EAC, KCC

¹⁾ Accuracy subject to: on factory approved installations the belt scale system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

²⁾ Contact Siemens application engineering (factorysupport.smpi@siemens.com) for consideration of higher belt speeds.

³⁾ Review by Siemens application engineer required.


Selection and ordering data		Article No.		Article No.
Milltronics WD600 A low- to medium- capacity scale for light to medium belt loading. 304 stainless steel construction with Delrin sliders. Load cells are available in nickel plated, or stainless steel. Two calibration weights are required and are ordered as separate line item. Refer to Calibration weights. Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		7MH7185-		
		A0		
Belt width 12 inch (300 mm) 18 inch (450 mm) 24 inch (600 mm) 30 inch (750 mm) 36 inch (900 mm) 42 inch (1 000 mm) 48 inch (1 200 mm)		1 2 3 4 5 6 7		
Load cell capacity <u>Nickel plated</u> 10 kg (22 lb) 15 kg (33.1 lb) 20 kg (44 lb) 30 kg (66.2 lb) 50 kg (110 lb) <u>Stainless steel</u> 6 kg (13.2 lb) 12 kg (26.4 lb) 30 kg (66.2 lb)		D E F G L H J K		
Further designs Please add "-Z" to article no. and specify order code(s). Stainless steel tag [69 x 38 mm (2.7 x 1.5 inch)], Measuring-point number / identification (max 27 characters), specify in plain text. Application Eng. reference number (max. 15 characters), specify in plain text. Manufacturer's test certificate: According to EN 10204-2.2		Order Code Y15 Y31 C11		
Operating instructions All literature is available to download for free, in a range of languages, at http://www.siemens.com/weighing/documentation				
			Spare parts Load cells <u>Stainless steel</u> 6 kg (13.2 lb) 12 kg (26.4 lb) 30 kg (66.2 lb) <u>Nickel plated</u> 10 kg (22 lb) 15 kg (33.1 lb) 20 kg (44 lb) 30 kg (66.2 lb) 50 kg (110 lb) Slider bar middle UHMW PE (for old style WD600) Slider bar side UHMW PE (for old style WD600) Slider bar acetal Test chain 1.62 lb/ft (2.41 kg/m), 60 inch	7MH7725-1EG 7MH7725-1EH 7MH7725-1EJ 7MH7725-1EK 7MH7725-1EL 7MH7725-1EM 7MH7725-1EN 7MH7725-1EP 7MH7723-1KF 7MH7723-1KE 7MH7723-1KG 7MH7723-1NF
			Calibration Hanger Weights 200 g (0.4 lb) 500 g (1.1 lb) 1 000 g (2.2 lb) 2 000 g (4.4 lb) 3 500 g (7.7 lb) 5 000 g (11 lb) 7 500 g (16.5 lb) 8 500 g (18.7 lb) 10 000 g (22 lb) 12 000 g (26.5 lb) 15 000 g (33.1 lb) Note: calibration accessories should be ordered as a separate item on the order.	7MH7724-1AF 7MH7724-1AG 7MH7724-1AH 7MH7724-1AJ 7MH7724-1BQ 7MH7724-1AK 7MH7724-1BR 7MH7724-1BS 7MH7724-1BT 7MH7724-1BU 7MH7724-1BV

Belt Weighing

Belt scales

Milltronics WD600

Dimensional drawings

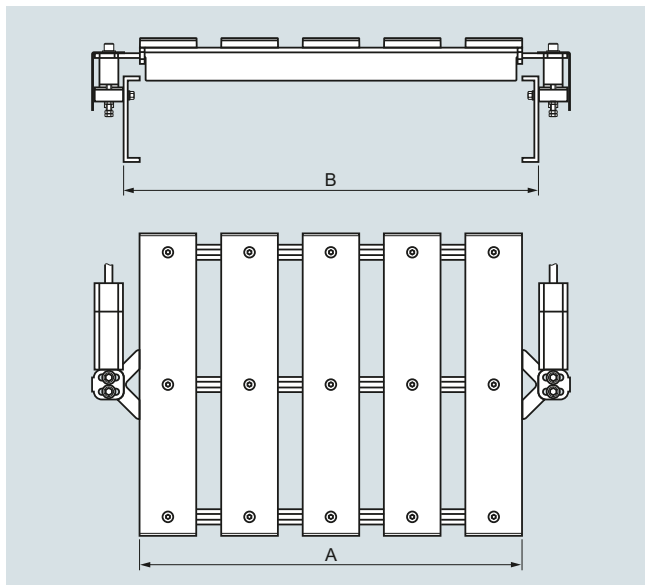


Belt width	A	B (min.)	B (max.)
12 (300)	14.25 (362)	15 (381)	16.5 (419)
18 (450)	20.25 (514)	21 (533)	22.5 (572)
24 (600)	26.25 (667)	27 (686)	28.5 (724)
30 (750)	32.25 (819)	33 (838)	34.5 (876)
36 (900)	38.25 (972)	39 (991)	40.5 (1 029)
42 (1 000)	44.25 (1 124)	45 (1 143)	46.5 (1 181)
48 (1 200)	50.25 (1 276)	51 (1 295)	52.5 (1 334)

WD600, dimensions in mm (inch)


4

Circuit diagrams

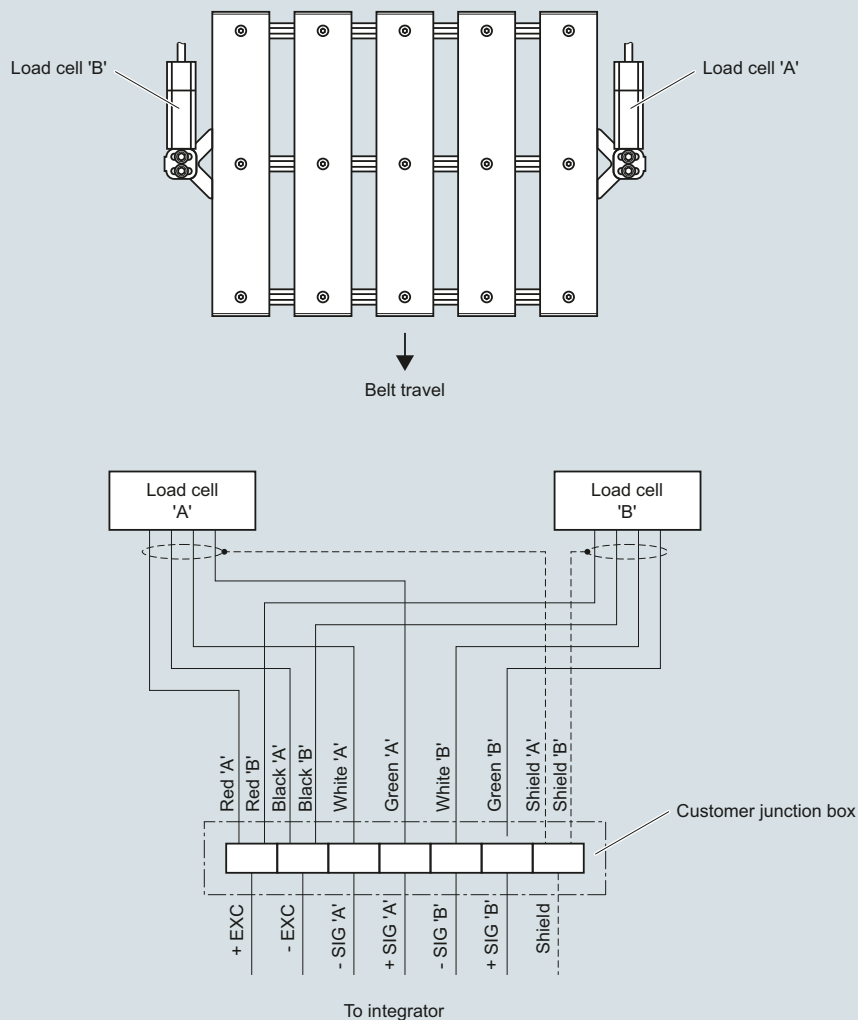

WD600 connections

Overview

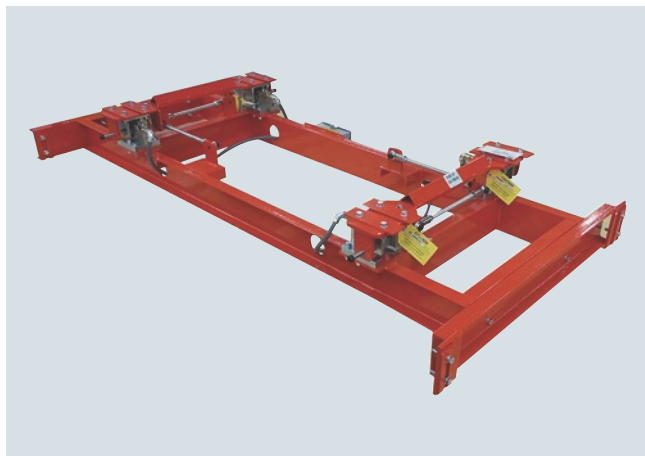

SITRANS WB300 is a heavy-duty, full-frame four load cell belt scale used for process and load-out control. Rails not included with belt scale.

Benefits

- Outstanding reliability and repeatability
- Fast reaction to product loading; capable of monitoring high product temperatures
- Rugged construction
- Shear beam design load cells with unique mounting do not react to horizontal forces from rollers/aprons

Application

SITRANS WB300 belt scale provides continuous in-line weighing on a variety of products in primary and secondary industries. It is proven in a wide range of tough applications from clinker (in cement production), to mining, iron, and steel.

The WB300's proven use of shear beam style load cells results in fast reaction to vertical forces, ensuring instant response to product loading. This enables it to provide optimum accuracy and repeatability even with uneven loading and fast pan speeds.

Operating with Milltronics BW500, SIWAREX WT241, WP241, or FTC microprocessor-based integrators, the WB300 provides indication of flow rate, totalized weight, belt load, and belt speed of bulk solid materials. A speed sensor monitors conveyor pan speed for input to the integrator.

The WB300 is installed in a simple drop-in assembly and has a complete full length frame to ensure support during operation. Existing rails are then attached to the mounting points. Maintenance is kept to a minimum, with just periodic calibration checks required.

Technical specifications

SITRANS WB300	
Mode of operation	
Measuring principle	Strain gauge load cells measuring load on pan conveyor rails
Typical application	Control in cement production
Measurement accuracy	
Accuracy ¹⁾	± 2 % or better of totalization over 33 ... 100 % operating range
Repeatability	± 0.1 %
Medium conditions	
Material temperature	-40 ... +150 °C (-40 ... +300 °F)
Apron design	
Pan width	<ul style="list-style-type: none"> • 24 ... 72 inch • Equivalent to 600 ... 1 800 mm in metric size
Pan speed	Up to 1 m/s (200 fpm) ²⁾
Capacity	
Up to 5 000 t/h (5 500 STPH) at maximum pan speed. Please contact a Siemens representative for higher rates.	
Conveyor incline	
<ul style="list-style-type: none"> • ± 20° from horizontal, fixed incline • Up to ± 30° with reduced accuracy³⁾ 	
Load cell	
Construction	17-4 PH (1.4568) stainless steel construction
Degree of protection	IP67
Cable length	3 m (10 ft)
Excitation	10 V DC nominal, 15 V DC maximum
Output	2 ± 0.002 mV/V excitation (nominal) at rated load cell capacity
Non-linearity and hysteresis	0.02 % of rated output
Non-repeatability	0.01 % of rated output
Capacity	
• Maximum ranges	500, 1 000, 2 500, 4 000, 5 000 lb
Overload	150 % of rated capacity, ultimate 300 % of rated capacity
Temperature	<ul style="list-style-type: none"> • -40 ... +75 °C (-40 ... +167 °F) operating range • -10 ... +40 °C (14 ... 104 °F) compensated
Weight	
Contact factory	
Interconnection wiring (to integrator)	
<ul style="list-style-type: none"> • < 150 m (500 ft) 18 AWG (0.75 mm²) 10 conductor shielded cable • > 150 ... 300 m (500 ... 1 000 ft) 18 ... 22 AWG (0.75 ... 0.34 mm²), 12 conductor shielded cable 	
Approvals	
CE, RCM	

¹⁾ Accuracy subject to: on factory approved installations the belt scale system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

²⁾ Contact Siemens application engineering (factorysupport.smpi@siemens.com) for consideration of higher belt speeds.





³⁾ Review by Siemens application engineer required.

Belt Weighing
Belt scales

SITRANS WB300

Selection and ordering data

SITRANS WB300	
SITRANS WB300 is a heavy-duty, full-frame four load cell belt scale used for process and load-out control. Rails not included with belt scale.	
Contact factory factorysupport.smpi@siemens.com	

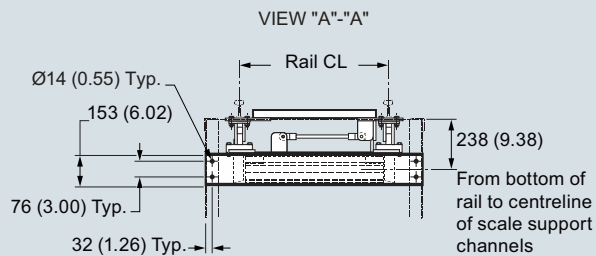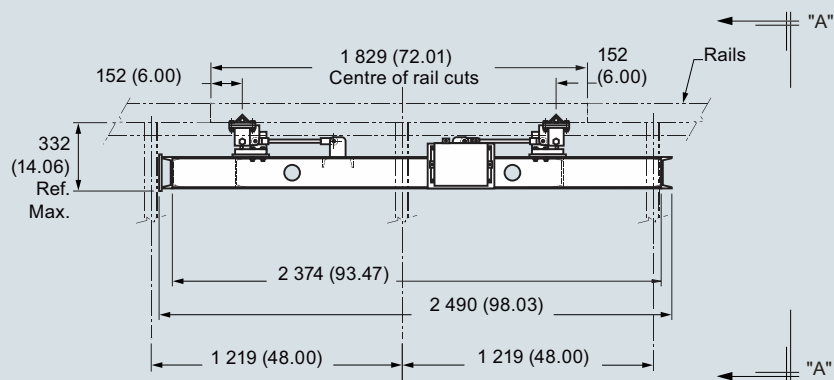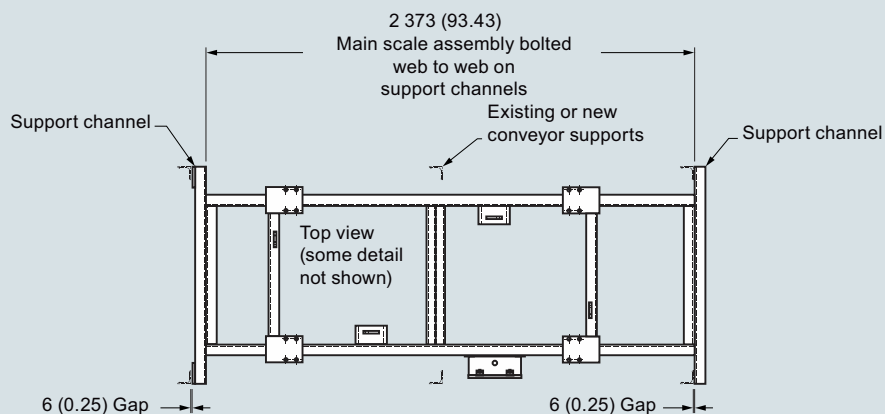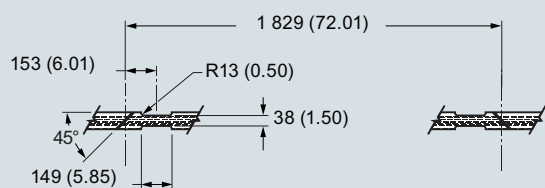Dimensional drawings


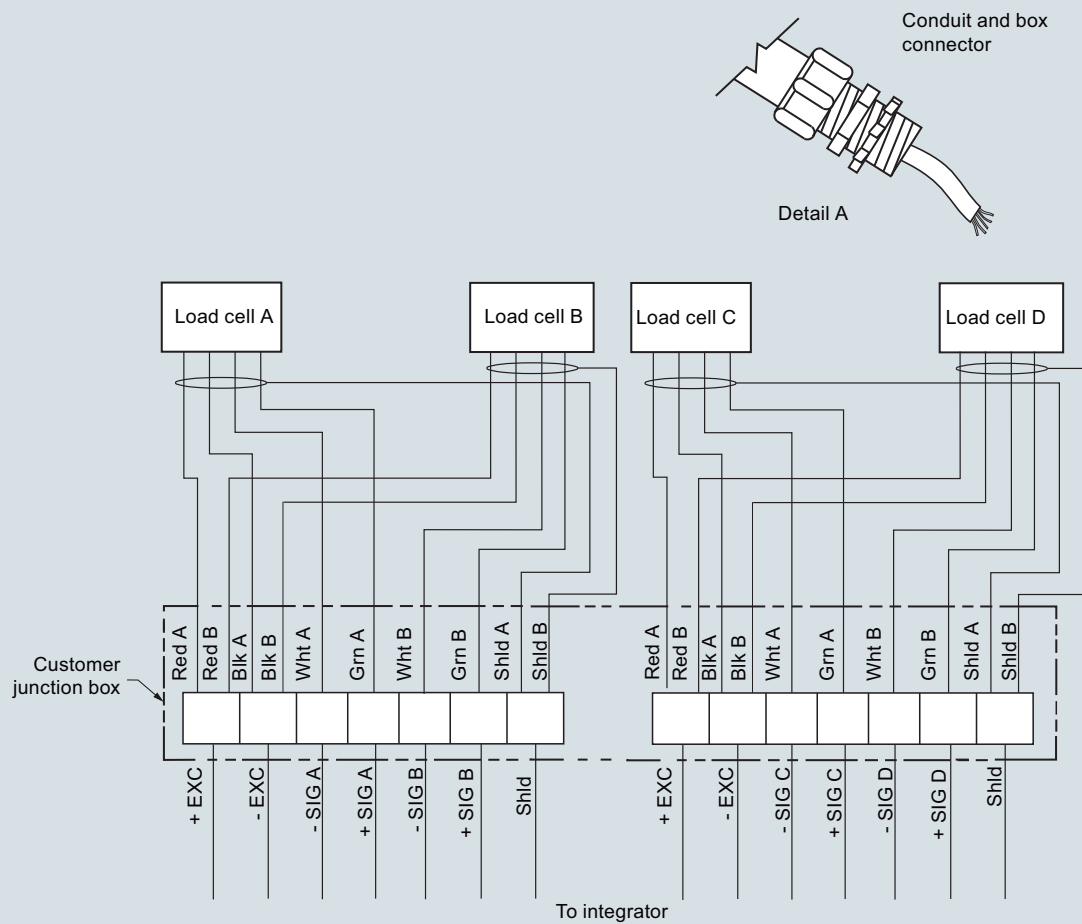
SITRANS WB300, dimensions in mm (inch)

Belt Weighing

Belt scales

SITRANS WB300

Circuit diagrams



Notes:

Conduit and cable arrangement may differ from example shown.

To maintain NEMA or IP rating, use only approved conduit and conduit fittings or cable glands.

SITRANS WB300 connections

Overview



SITRANS WB310 is a heavy-duty, full-frame two load cell, pivoted pan based, belt scale used for process monitoring.

Benefits

- Outstanding reliability and repeatability
- Unique parallelogram style load cell design
- Fast reaction to product loading; capable of monitoring low to high material loads
- Rugged construction
- Heavy duty slider pan with counter weight-pivoted design to minimized dead loads
- Suitable for uneven or light product loading

Application

SITRANS WB310 belt scale provides continuous in-line weighing on a variety of products in recycling industries. It is proven in a wide range of tough applications from sorting (in-coming processes) to production monitoring.

SITRANS WB310 uses parallelogram-style load cells that result in fast reaction to vertical forces, ensuring instant response to product loading. This enables it to provide optimum accuracy and repeatability even with uneven loading.

Operating with Milltronics BW500, SIWAREX WT241, WP241, or FTC microprocessor-based integrators, WB310 provides indication of flow rate, totalized weight, belt load, and belt speed of bulk solid materials. A speed sensor monitors conveyor belt speed for input to the integrator.

SITRANS WB310 is installed in a simple drop-in operation and has a complete full length frame to ensure support during operation. With minimal rotating parts, maintenance is kept simple and easy, with just periodic calibration checks and greasing of bearings required.

Technical specifications

SITRANS WB310	
Mode of operation	
Measuring principle	Strain gauge load cells measuring load on belt conveyor pan
Typical application	Control in recycling
Measurement accuracy	
Accuracy ¹⁾	± 5 % or better of totalization over 25 ... 100 % operating range
Repeatability	± 0.1 %
Medium conditions	
Material temperature	-40 ... +75 °C (-40 ... +167 °F)
Belt design	
Belt width	<ul style="list-style-type: none"> • 54 ... 72 inch • Equivalent to 1 300 ... 1 800 mm in metric size
Belt speed	Up to 1 m/s (200 fpm) ²⁾
Capacity	
	Up to 5 000 t/h (5 500 STPH) at maximum belt speed. Please contact a Siemens representative for higher rates.
Conveyor incline	
	<ul style="list-style-type: none"> • ± 20° from horizontal, fixed incline • Up to ± 30° with reduced accuracy³⁾
Load cell	
Construction	17-4 PH (1.4568) stainless steel construction with 304 (1.4301) stainless steel cover.
Degree of protection	IP67
Cable length	3 m (10 ft)
	Note: to calculate installation cable length subtract 3 048 mm (120 inch) from the "A" dimension
Excitation	10 V DC nominal, 15 V DC maximum
Output	2 ± 0.002 mV/V excitation (nominal) at rated load cell capacity
Non-linearity and hysteresis	0.02 % of rated output
Non-repeatability	0.01 % of rated output
Capacity	
• Maximum ranges	50, 100, 250, 500 lb
Overload	150 % of rated capacity, ultimate 300 % of rated capacity
Temperature	<ul style="list-style-type: none"> • -50 ... +75 °C (-58 ... +167 °F) operating range • -40 ... +65 °C (-40 ... +149 °F) compensated
Weight	
Contact factory	
Interconnection wiring (to integrator)	
<ul style="list-style-type: none"> • < 150 m (500 ft) 18 AWG (0.75 mm²) 6 conductor shielded cable • > 150 ... 300 m (500 ... 1 000 ft) 18 ... 22 AWG (0.75 ... 0.34 mm²), 8 conductor shielded cable 	
Approvals	
CE, RCM	

¹⁾ Accuracy subject to: on factory approved installations the belt scale system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

²⁾ Contact Siemens application engineering (factorysupport.smpi@siemens.com) for consideration of higher belt speeds.

³⁾ Review by Siemens application engineer required.

Belt Weighing

Belt scales

SITRANS WB310

Selection and ordering data


SITRANS WB310

SITRANS WB310 is a heavy-duty, full-frame two load cell, pivoted pan based, belt scale used for process monitoring.


Contact factory

factorysupport.smpi@siemens.com

Dimensional drawings

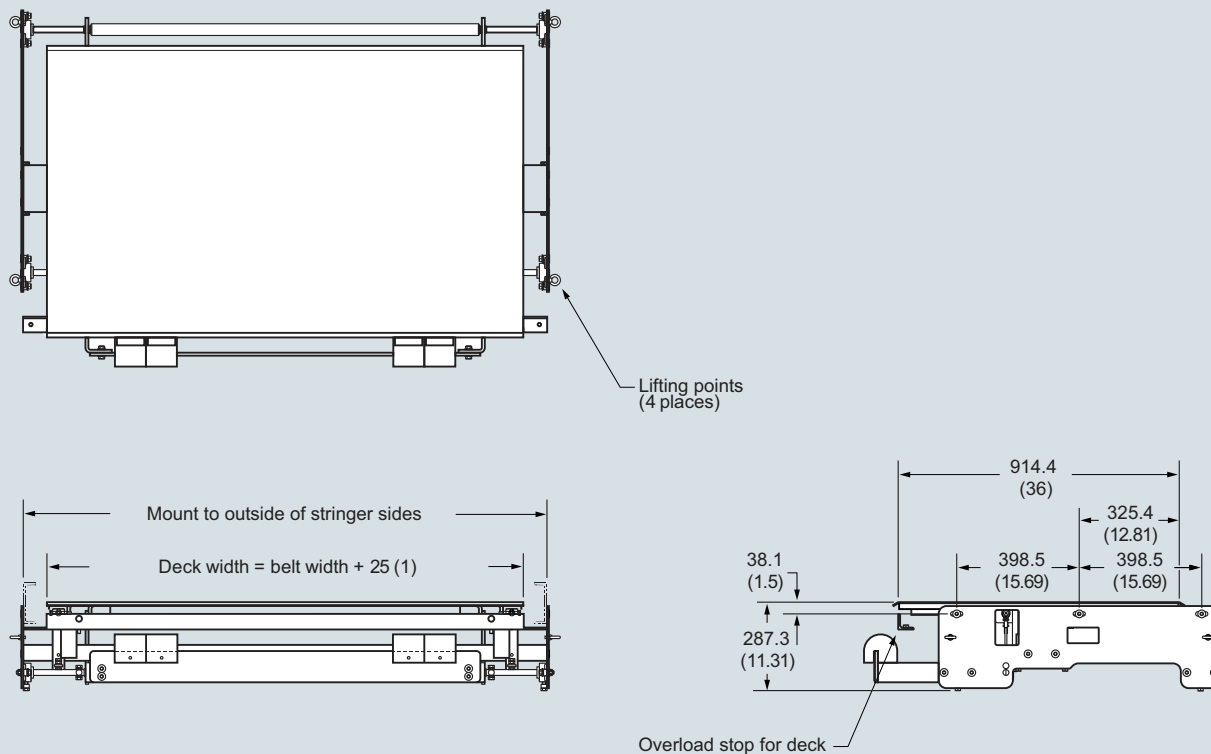

SITRANS WB310, dimensions in mm (inch)

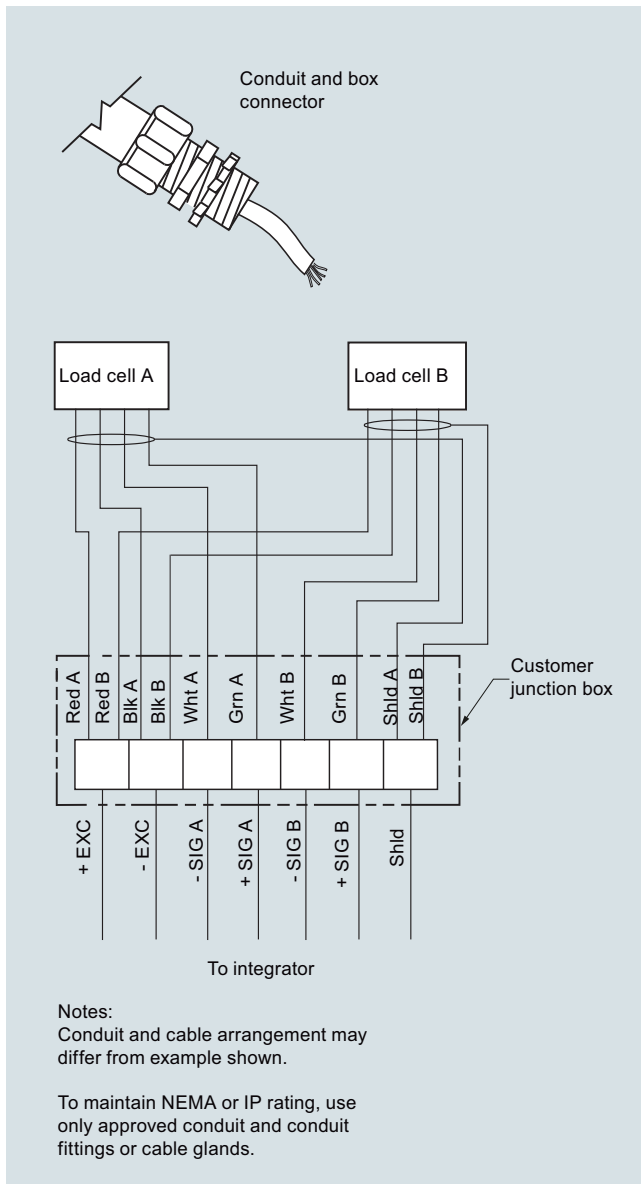Circuit diagrams


SITRANS WB310 connections

Belt Weighing

Speed sensors

Milltronics TASS

Overview



Milltronics TASS is a compact low-profile, wheel-driven return belt speed sensor, ideal for use on mobile crushers and in constricted spaces.

Benefits

- Rugged design
- Easy, low cost installation
- Compact, low-profile speed sensor
- IP67 rated


Application

Milltronics TASS speed sensor operates in conjunction with a conveyor belt scale, providing signals to an integrator (Milltronics BW500, or SIWAREX FTC) which computes the rate of material being conveyed. The trailing arm speed sensor monitors conveyor belt speed, with the output signal transmitted by cable connection to the integrator.

Easily installed close to the belt scale assembly, the TASS provides a signal generated as the wheel rotates on the return belt. Pulses are generated by the internal proximity switch detecting the rotation of the five spoked wheel. The TASS is mounted to the static beam of the belt scale or to a structural cross member via a pivoting bracket assembly.

The TASS is a compact, low-profile, rugged speed sensor, most often used on mobile crusher applications where space is limited. The TASS output can be applied to any Milltronics belt scale integrator.

Design

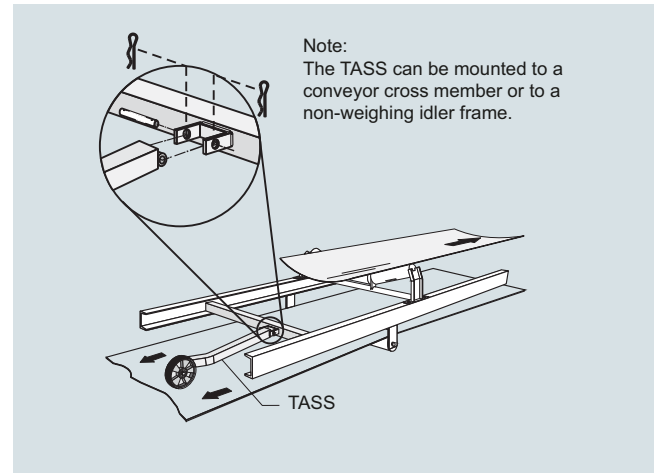

TASS Installation

Technical specifications

Milltronics TASS	
Mode of operation	
Measuring principle	Inductive proximity sensor provides pulse to integrator
Typical application	Mobile crusher
Input	<ul style="list-style-type: none"> • Bi-directional wheel rotation • 25 ... 350 rpm
Output	<ul style="list-style-type: none"> • Inductive proximity sensor • Open collector, NPN, sinking output, max. 200 mA • Pulses: 5 per revolution • 9.947 pulses/m, 3.03 pulses/ft
Rated operating conditions	
Operating temperature	-25 ... +70 °C (-13 ... +158 °F)
Max. belt speed	3 m/s (590 fpm)
Degree of protection	IP67
Design	
Trailing arm assembly	Painted mild steel
Wheel	160 mm (6.3 inch) diameter cast aluminum with polyurethane tread
Power supply	10 ... 35 V DC, 15 mA at 24 V DC maximum
Wiring	
Brown	+ Excitation (10 ... 35 V DC)
Black	+ Signal
Blue	- Common
Interconnection wiring (to integrator)	<ul style="list-style-type: none"> • 5 m, 3 conductor shielded PVC cable, 3 x 0.25 mm² (23 AWG), protected with 1 000 mm of flexible conduit • 300 m (1 000 ft) maximum cable run
Approvals	CE, RCM, EAC, KCC

Selection and ordering data

Article No.

Order Code

Milltronics TASS speed sensor

Compact, low-profile, wheel driven return belt speed sensor for belt conveyors; ideal for use on mobile crushers and in constricted spaces.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Model

5 pulses per revolution

Fabrication

Standard, C5-M rated polyester painted mild steel

Stainless steel 304 (1.4301), bead blast finish (1 ... 6 µm, 40 ... 240 µin)

Note: wheel is aluminum for all versions

Mounting options

Complete with standard mounting kit

Approvals

CE, RCM, EAC, KCC

7MH7131-

0

1

A

B

A

1

Further designs

Please add '-Z' to article no. and specify order code(s).

Stainless steel tag [69 x 38 mm (2.7 x 1.5 inch)]
Measuring-point number / identification (max 27 characters), specify in plain text.

Manufacturer's test certificate:
According to EN 10204-2.2

Operating instructions

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/weighing/documentation>

Spare parts

TASS wheel

TASS proximity switch

TASS wheel, stainless steel sealed bearing

Conduit replacement kit

Y15

C11


Article No.

7MH7723-1AN

7MH7723-1AP

7MH7723-1GW

7MH7723-1NA

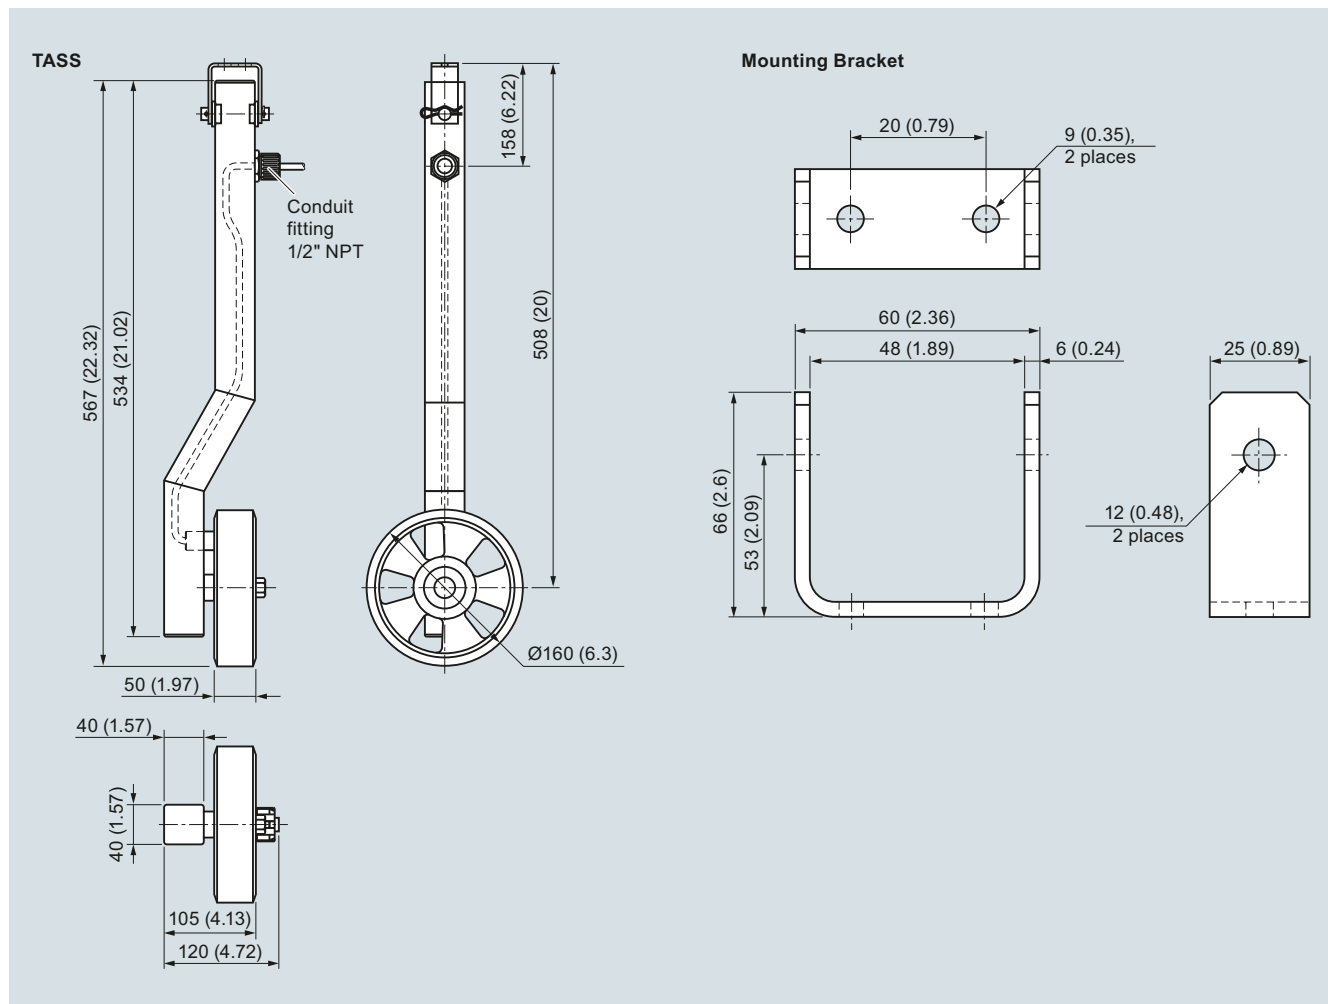Dimensional drawings


TASS, dimensions in mm (inch)

Belt Weighing

Speed sensors

Milltronics RBSS

Overview



Milltronics RBSS is a high resolution, wheel-driven return belt speed sensor.

Benefits

- Rugged design
- IP67 rated
- Easy, low cost installation
- Accurate belt speed detection

Application



Milltronics RBSS monitors conveyor belt speed, with the output signal transmitted by cable connection to the integrator (Milltronics BW500, or SIWAREX FTC).

Easily installed close to the belt scale assembly, the RBSS provides a signal generated as the wheel on the sensor rotates on the return belt. To secure this cost-effective unit in place, position a cross bar between stringers - either just before or after a return belt idler, or use the optional mounting bracket. The weight of the RBSS ensures positive rotation of the wheel in the middle of the return belt, and pulses from the magnetic sensor are generated by the rotation of the 60 toothed speed sprocket driven by the wheel.

The RBSS output can be applied to any belt scale integrator.

Design

RBSS Standard Mounting

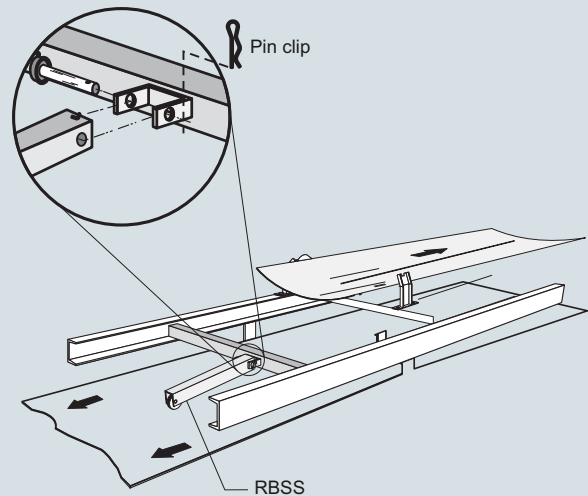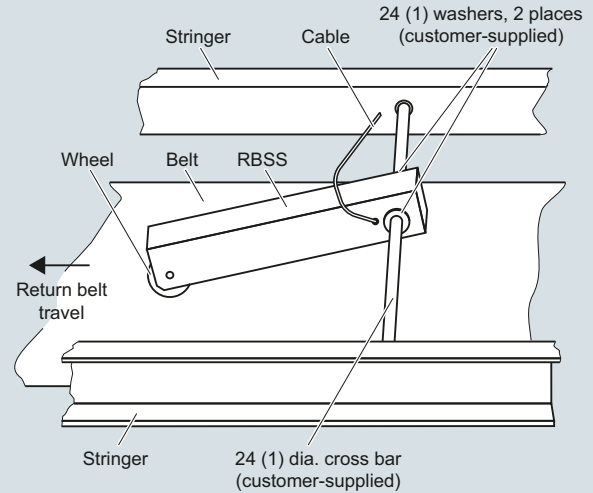

RBSS installation, dimensions in mm (inch)

Technical specifications

Milltronics RBSS	
Mode of operation	
Measuring principle	Magnetic proximity sensor provides pulse to integrator
Typical application	Aggregate belt conveyors
Input	Wheel rotation 2 ... 450 rpm, bi-directional
Output	<ul style="list-style-type: none"> 60 pulses per revolution, 2 ... 450 Hz, 150.4 pulses/m (4.58 pulses/ft) RBSS: open collector, NPN sinking output, max. 17 mA RBSS IS: NAMUR NC, load current, 0 ... 15 mA
Rated operating conditions	
Ambient temperature	<ul style="list-style-type: none"> RBSS: -40 ... +105 °C (-40 ... +220 °F) RBSS IS: -25 ... +100 °C (-14 ... +212 °F)
Max. belt speed	3 m/s (590 fpm)
Degree of protection	IP67
Design	
Trailing arm	Painted mild steel
Sensor wheel	127 mm (5 inch) diameter, polyurethane tread
Power supply	<ul style="list-style-type: none"> RBSS: 4.5 ... 28 V DC, 16 mA RBSS IS: 5 ... 25 V DC from IS switch isolator
Interconnection wiring (to integrator)	<ul style="list-style-type: none"> RBSS: 3 m, 3 conductor 22 AWG shielded cable <ul style="list-style-type: none"> - 300 m (1 000 ft) maximum cable run RBSS IS: 2 m, 2 conductor 26 AWG PVC covered cable <ul style="list-style-type: none"> - 300 m (1 000 ft) maximum cable run to IS switch isolator - 300 m (1 000 ft) maximum cable run from IS switch isolator and integrator
Approvals	
RBSS	CE, RCM, EAC, KCC ¹⁾
RBSS IS (with suitable IS switch isolator or switch amplifier) ²⁾	<ul style="list-style-type: none"> ATEX II 1G Eex ia IIC T6 ATEX II 1D Ex iaD 20 T 108 °C CSA/UL: Class I, Div. 1, Groups A, B, C, and D; Class II, Div. 1, Groups E, F, and G; Class III, Div. 1, EAC Ex CE, RCM, EAC, KCC²⁾
Proximity switch approval ratings (Pepperl+Fuchs #NJ0.8-5GM-N)	<ul style="list-style-type: none"> ATEX II 1G EEx ia IIC T6 ATEX II 1D Ex iaD 20 T 108 °C CE, CSA, UL²⁾
Optional switch isolator (required for RBSS IS) ³⁾	<ul style="list-style-type: none"> ATEX II (1) G [EEx ia] IIC CSA/UL: Class 1, Div. 1, Groups A, B, C, and D; Class II, Div. 1, Groups E, F, and G, Class III, EAC Ex CE, RCM, EAC, KCC²⁾
• Pepperl+Fuchs #KFA5-SOT2-Ex2 or #KFA6-SOT2-Ex2	

Selection and ordering data

Article No.

Milltronics RBSS speed sensor	7MH7134-
A high resolution wheel-driven return belt speed sensor	
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
Model	
60 pulses per revolution	2
Fabrication	
Standard, C5-M rated polyester painted mild steel	A
Mounting options	
With mounting kit	B
Approvals	
CE, RCM, KCC, ATEX II 1G, Ex ia IIC T6, ATEX II 1D Ex iaD 20 T108 °C, CSA/UL Class I, Div. 1, Groups A, B, C, and D; Class II, Div. 1, Groups E, F, and G; Class III, Div. 1, EAC Ex ⁶⁾	2
CE, RCM, EAC, KCC	3
Switch isolator	
Not required	0
115 V AC ⁴⁾	1
230 V AC ⁴⁾	2
Further designs	Order Code
Please add "-Z" to article no. and specify order code(s).	
Stainless steel tag [69 x 38 mm (2.7 x 1.5 inch)], Measuring-point number / identification (max 27 characters), specify in plain text.	Y15
Manufacturer's test certificate: According to EN 10204-2.2	C11
Operating instructions	
All literature is available to download for free, in a range of languages, at http://www.siemens.com/weighing/documentation	
Spare parts	Article No.
Wheel, 127 dia-polyurethane, sealed bearing	7MH7723-1FX
Magnetic proximity switch	7MH7723-1GA
Switch, inductive, NJ0.8-5GM-N (approvals option 2) ⁴⁾	7MH7723-1AS
P & F switch isolator, 115 V AC ⁴⁾	7MH7723-1EB
P & F switch isolator, 230 V AC ⁴⁾	7MH7723-1EC
Wheel and shaft, 152 mm diameter ⁵⁾	7MH7723-1EN
60 tooth gear ⁵⁾	7MH7723-1EQ
Bearing (two required) ⁵⁾	7MH7723-1ER
Accessories	
Conduit kit	7MH7723-1NA

¹⁾ EMC performance available upon request.

²⁾ Approvals for RBSS IS are based on internally mounted NAMUR slotted proximity switch (Pepperl+Fuchs #NJ0.8-5GM-N) and use of suitable IS switch isolator (amplifier). Please see RBSS operating Instructions for more information.

³⁾ Approval ratings for the proximity switch and IS switch isolator are the property of Pepperl+Fuchs. Copies of these Approval Certificates may be obtained at <http://www.siemens.com/processautomation>.

⁴⁾ Required with RBSS IS.

⁵⁾ For use with old style RBSS PBD-51033452.

⁶⁾ Switch isolator required.


Belt Weighing

Speed sensors


Milltronics RBSS

Dimensional drawings

RBSS

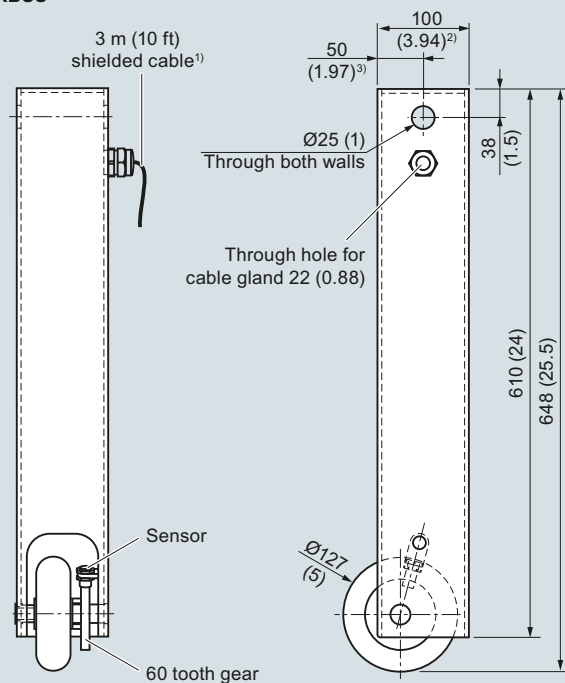

Mounting Bracket

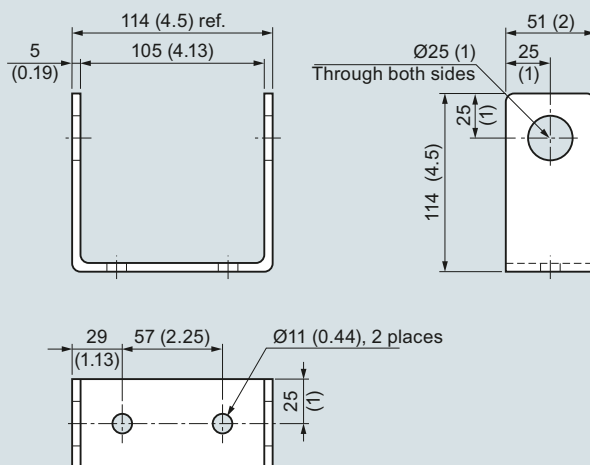

¹⁾ Cable for RBSS (IS, 5 ... 25 V) and RBSS (CE, 10 ... 30 V) is 2 m (6.5 ft).

²⁾ Dimension equals 102 (4) if manufactured in Canada.

³⁾ Dimension equals 51 (2) if manufactured in Canada.

RBSS, dimensions in mm (inch)

Overview

SITRANS WS300 is a low- to high-resolution shaft-driven speed sensor.

Benefits

- Compact and economical
- Easy, low-cost installation
- Accurate belt speed detection
- Optional resolutions for measurement over a range of belt speeds
- Corrosion resistant

Application

SITRANS WS300 speed sensor operates in conjunction with a conveyor belt scale, providing a signal to an integrator which computes the rate of material being conveyed. At only 1.22 kg (2.68 lb), it is one of the lightest and most durable units ever developed for monitoring conveyor belt speed. With its rugged cast aluminum housing, it is suitable for outdoor installation, and its low weight prolongs bearing life.

It is directly coupled to a rotating tail or bend pulley shaft to ensure accurate belt-travel readout, eliminating problems caused by belt slippage or material build-up. The WS300 converts shaft rotation into a pulse train of 32, 256, 1 000 or 2 000 pulses per revolution using a high precision rotary optical encoder. The digital signal is transmitted as speed input to any Siemens integrator for calculation of belt speed, flow rate and totalized weight.

This low- to high-resolution speed sensor provides a frequency signal proportional to the shaft speed, enabling a range of speeds to be read accurately. The quadrature type shaft encoder prevents erroneous speed signals due to vibration or shaft oscillation. The WS300 is easily mounted and is bi-directional for either clockwise or counter-clockwise belt travel.

The IS version uses an inductive proximity switch detecting rotating targets.

Belt Weighing



Speed sensors

SITRANS WS300

Design

Mounting

Mounting to a Tail Pulley

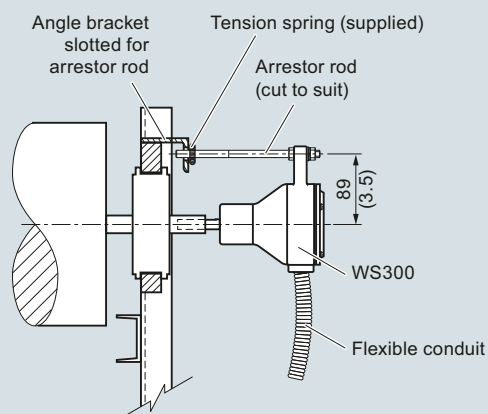
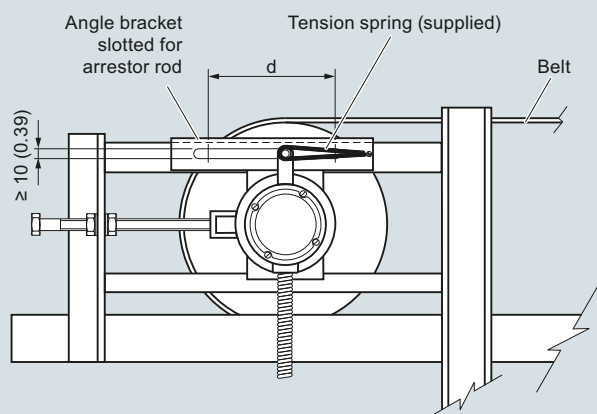


Notes:

Distance 'd' is the take-up travel on the tail pulley.

When adjusting the belt take-up, ensure that there is play on the arrestor rod. If the arrestor rod is pushed against the end of its travel slot, premature bearing wear may result.

Mounting to a Bend or Snub Pulley

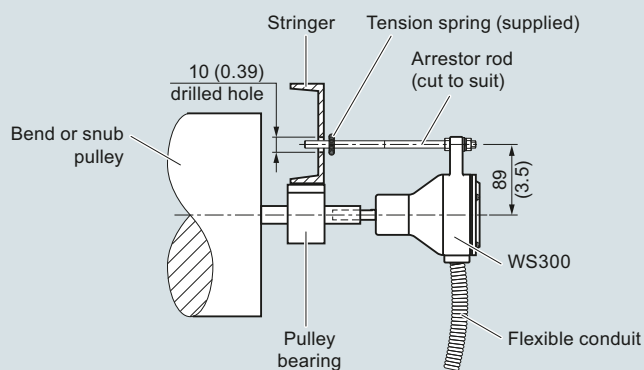
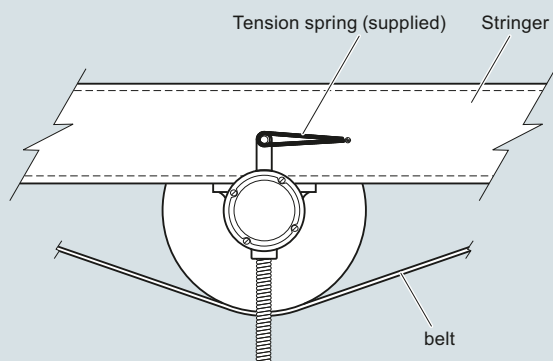


Notes:

When mounting to a bend or a snub pulley only, a 10 mm (0.39 inch) drilled hole is required for the arrestor rod.

WS300 mounting, in mm (inch)

Mounting using optional threaded shaft coupling

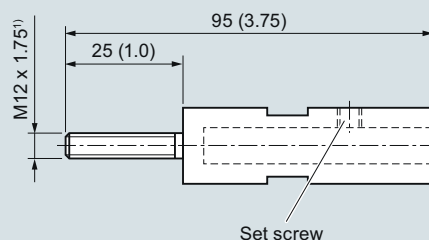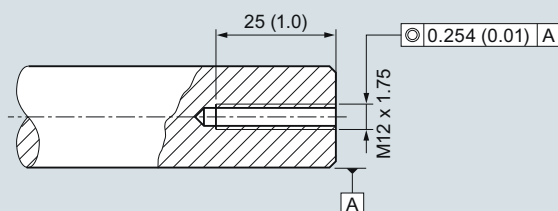

¹⁾ Use adhesive when installing threaded shaft coupling (e.g. Loctite).

WS300 mounting using threaded shaft coupling, in mm (inch)

Technical specifications

SITRANS WS300	
Mode of operation	
Measuring principle	Standard: pulse from shaft rotation using high precision rotary optical encoder IS: pulse from inductive proximity switch
Typical application	When a low- to high-resolution speed sensor is required
Input	Shaft rotation 0.3 ... 2 000 rpm, bi-directional, resolution dependent
Output	<ul style="list-style-type: none"> Unidirectional open collector, NPN, sinking output Standard: 10 ... 30 V DC, 25 mA max. IS: NAMUR NC, load current, 0 ... 15 mA 32, 256, 1 000, or 2 000 pulses per revolution (ppr) 32 ppr: 2 000 max. rpm, 1 066 Hz 256 ppr: 2 000 max. rpm, 8 530 Hz 1 000 ppr: 900 max. rpm, 15 000 Hz 2 000 ppr: 450 max. rpm, 15 000 Hz
Rated operating conditions	
Ambient temperature	Standard: -40 ... +70 °C (-40 ... +158 °F) IS: -25 ... +100 °C (-13 ... +212 °F)
Degree of protection	NEMA 4X, Type 4X, IP65
Design	
Enclosure	<ul style="list-style-type: none"> Rated NEMA 4X, Type 4X, IP65 Painted aluminum Stainless steel (optional)
Power supply	<ul style="list-style-type: none"> Standard: 10 ... 30 V DC, 60 mA max. IS: 5 ... 16 V DC, 25 mA max. (from IS switch isolator)
Cable	
Recommended	<ul style="list-style-type: none"> Standard: 3-wire shielded, 0.82 mm² (18 AWG) IS: 2-wire shielded 0.324 mm² (22 AWG) Max. run 305 m (1 000 ft)

SITRANS WS300	
Approvals	
WS300 Standard	<ul style="list-style-type: none"> General
Hazardous	<ul style="list-style-type: none"> CE, RCM, EAC, KCC CSA/FM Class II, Div. 1, Groups E, F, G; Class III ATEX I M1, ATEX II 2D Ex tD A21 IP65 T170 °C MSHA EAC Ex, RTN IEC Ex, Ex tD A21 IP65 T70 °C
WS300 IS (with suitable IS switch isolator or switch amplifier) ¹⁾	<ul style="list-style-type: none"> ATEX II 1G EEx ia IIC T6 ATEX II 1D Ex iaD 20 T 108 °C CSA/UL: Class I, Div. 1, Groups A, B, C and D; Class II, Div. 1, Groups E, F and G; Class III, Div. 1 CE, RCM²⁾
Proximity switch approval ratings (Pepperl+Fuchs #NJ0.8-5GM-N)	<ul style="list-style-type: none"> ATEX II 1G EEx ia IIC T6 ATEX II 1D Ex iaD 20 T 108 °C CSA, UL CE²⁾
Optional switch isolator (required for WS300 IS) ³⁾	<ul style="list-style-type: none"> Pepperl+Fuchs #KFA5-SOT2-Ex2 or #KFA6-SOT2-Ex2 ATEX II (1) G [EEx ia] IIC CSA/UL: Class 1, Div. I, Groups A, B, C, and D. Class II, Div. 1, Groups E, F, and G, Class III CE²⁾

¹⁾ Approvals for WS300 IS are based on internally mounted NAMUR proximity switch (Pepperl+Fuchs #NJ0.8-5GM-N) and use of suitable IS switch isolator (amplifier). Please see WS300 operating instructions for more information.
²⁾ Approvals for WS300 IS are based on internally mounted NAMUR slotted proximity switch (Pepperl+Fuchs #NJ0.8-5GM-N) and use of suitable IS switch isolator (amplifier). Please see WS300 operating instructions for more information.
³⁾ Approval ratings for the proximity switch and IS switch isolator are the property of Pepperl+Fuchs. Copies of these approval certificates may be obtained at <http://www.siemens.com/processautomation>.

Belt Weighing

Speed sensors

SITRANS WS300

Selection and ordering data

SITRANS WS300 speed sensor

A medium- to high-resolution shaft-driven speed sensor used with Milltronics belt scales.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Resolution (pulses per revolution)

32

256

1 000

2 000

Enclosure

C5-M rated polyester painted aluminum, NEMA 4X

304 (1.4301) stainless steel, vibra finish NEMA 4X

Approvals

CSA/FM Class II, Div. 1, Groups E, F, G Class III

ATEX II 2D, Ex tD A21 IP65 T70 °C, EAC Ex CE, RCM, IEC Ex, Ex tD A21 IP65 T70 °C

CSA/UL Class I, Div. 1, Groups A, B, C, and D; Class II, Div. 1, Groups E, F, and G; Class III, Div. 1, ATEX II 1G, EEx ia IIC T6, ATEX II 1D Ex iaD 20 T108 °C, CE, RCM¹⁾²⁾

MSHA, ATEX II 1GD, Ex ia IIC T4 Ga, Ex ia IIIC T135 °C Da, ATEX I M1, Ex ia I Ma, IEC Ex 1GD, Ex ia IIC T4 Ga, Ex ia IIIC T135 °C Da, IEC Ex I M1, Ex ia I Ma

CE, RCM, EAC, KCC

Connections

Standard, up to 2 integrators

Multiple, up to 10 integrators

Switch isolator

Not required

115 V AC³⁾

230 V AC³⁾

Further designs

Please add **"-Z"** to article no. and specify order code(s).

Acrylic coated, stainless steel tag [13 x 45 mm (0.5 x 1.75 inch)]; Measuring-point number/identification (max. 16 characters), specify in plain text

Manufacturer's test certificate:
According to EN 10204-2.2

Article No.

7MH7177-

0

1

2

3

4

A

B

A

B

C

D

1

2

0

1

2

Y17

C11

Order Code

7MH7177-

0

1

2

Y17

C11

1

2

0

1

2

Y17

C11

Order Code

7MH7177-

0

1

2

Y17

C11

1

2

0

1

2

Y17

C11

1

2

0

1

2

Y17

C11

1

2

0

1

2

Operating instructions

English

Note: the operating instructions should be ordered as a separate item on the order.

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/weighing/documentation>

Spare parts

Circuit card 32 PPR, up to 2 integrators

Circuit card 32 PPR, up to 10 integrators

Circuit card 256 PPR, up to 2 integrators

Circuit card 256 PPR, up to 10 integrators

Circuit card 1 000 PPR, up to 2 integrators

Circuit card 1 000 PPR, up to 10 integrators

Circuit card 2 000 PPR, up to 2 integrators

Circuit card 2 000 PPR, up to 10 integrators

Circuit card 32 PPR, IS

Rubber coupling

Coupling hub for 32, 256 PPR versions

Coupling hub for 1 000, 2 000 PPR versions

Enclosure cover

Enclosure bearing assembly

Enclosure cover, stainless steel

Enclosure bearing assembly, stainless steel

Threaded shaft coupling

Arrestor rod

Arrester rod tension spring

WS300 mounting bracket for MD-36 retrofit

WS300 mounting bracket SS for MD-36 retrofit

Cable for speed sensor connection to termination box 3 cond, 18G (order per meter)⁴⁾

Cable for IS speed sensor connection to termination box 3 cond, 22G (order per meter)⁴⁾

Pepperl+Fuchs IS switch isolator, 115 V AC

Pepperl+Fuchs IS switch isolator, 230 V AC

Article No.

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01

7ML1998-5ML01


¹⁾ The Approval Ratings for the Proximity Switch and the IS switch isolator are the property of Pepperl+Fuchs.

For current approvals, go to: <http://www.am.pepperl-fuchs.com>.

²⁾ Approval option B requires use of switch isolator to interface with the belt scale integrator, and is available with Resolution option 1, and Connections option 1 only.

³⁾ For use with IS approval option B.

⁴⁾ Cable length orders exceeding 150 m (500 ft) may not be supplied as a continuous length.

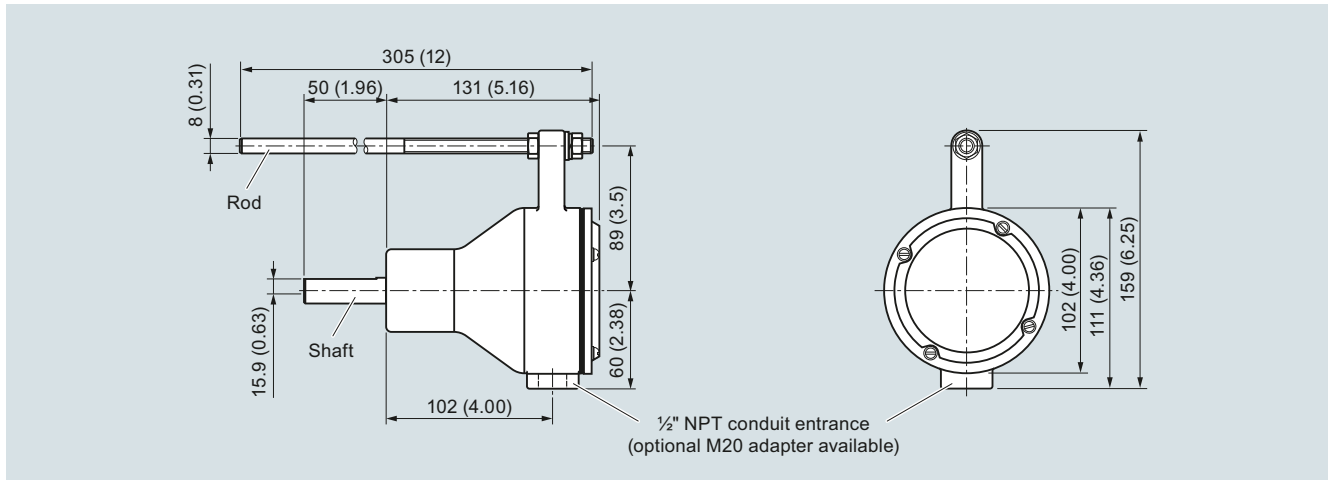Dimensional drawings

WS300, dimensions in mm (inch)

Circuit diagrams**Connections (Standard)**

Description	Terminal
10 ... 30 V DC	1
Speed out-CW	2
Speed out-CCW	3
Common	4
Ground	GND

- Determine the pulley shaft rotation on the end of the pulley shaft to which the WS300 is attached.
- If the pulley shaft is rotating clockwise, connect the appropriate wire to terminal 2. If the pulley shaft is rotating counter-clockwise, connect the appropriate wire to terminal 3.
- Do not connect terminals 2 and 3 at the same time.
- Connection between the WS300 standard unit and the integrator should be made with three-wire shielded, 0.82 mm² (18 AWG) cable.
- Ground shield of cable at integrator only.
- Connect shield to appropriate terminal at the integrator.

Terminal Connections to integrator

WS300	1 +V	2 CW	3 CCW	4 Cmn	GND
Milltronics BW500	19	16	16	17	N/C
SIWAREX FTC	CI+, 1L+	CI-	CI-	1M	N/C
SIWAREX WP241	1L+	DI.0	DI.0	2M, 1M	N/C

Connections (IS)

Description	Terminal
5 ... 16 V DC, 25 mA max. (from IS Switch Isolator)	1
Speed out	2
Ground	GND

- Only terminals 1 and 2 are required; rotation in a clockwise or counter-clockwise direction is not required.
- To connect the switch isolator, use two-wire shielded 0.324 mm² (22 AWG) cable. Use the same cable to connect the switch isolator to the integrator.
- Ground shield of cable at integrator only.
- Connect shield to appropriate terminal at the integrator.

Terminal Connections to integrator

W300 IS	IS Switch Isolator Terminal	Milltronics BW500	SIWAREX FTC	SIWAREX WP241
1	3			
2	1			
	7	16	1L+	1L+
	8	17	CI+	CI+

Connect CI- to Common

Belt Weighing

Accessories

Calibration weight lifter Milltronics MWL

Overview



Milltronics MWL weight lifter is a mechanical calibration weight lifter for MCS, MSI, MMI, and MUS belt scales.

Benefits

- Safe and easy application of belt scale reference weights with the operator remaining external to the conveyor
- Modular construction, easily adaptable to different conveyor widths
- Low profile allowing easy fit into belt conveyor
- Easy to install and apply
- Easy to store drive handle that can be applied to left or right side of MWL
- Security pin used to ensure safe storage of weight
- Can be used with new and existing applications

Application

Milltronics MWL mechanically raises and lowers the static weights and then stores the weights securely above the belt scale calibration arms, and allows the operator to lower and apply them safely without having to lean into the conveyor. The MWL is manually operated, and uses a high mechanical advantage to enable weights up to 340 kg (750 lb) to be applied with very limited effort. The crank handle uses twelve rotations for full range of motion, and can be removed and stored for safety with the locking ball-pin which secures the MWL when it is not in use.

Two lifting arms support a base-bar weight above the calibration (test) weight brackets of the belt scale: either flat bar or round bar style calibration weights are applicable. Locating notches in the base-bar weight engage the calibration weights securely on the lifting arms in the stored position, and the gear drive locks the lifting arms in place.

Installation is easy, just four bolt holes to drill after locating the MWL gear modules (LH and RH) on the conveyor with respect to the belt scale. After running the MWL empty to ensure proper alignment, and then tightening mounting bolts, you are ready for the loading of the calibration weights. This is the last time that they will have to be lifted by hand.

Technical specifications

Milltronics MWL weight lifter

Mode of operation	
Principle of operation	Mechanical gear drive
Typical application	Belt scale calibration
Medium conditions	
Max. ambient temperature	75 °C (167 °F)
Belt design	
Belt width	<ul style="list-style-type: none"> • MCS: up to 1 600 mm (60 inch) CEMA width • MUS-STD standard duty: up to 1 000 mm (42 inch) CEMA width • MUS-HD heavy-duty: up to 1 600 mm (60 inch) CEMA width • MSI: 18 ... 96 inch CEMA belt width
Conveyor incline	± 15° from horizontal
Idlers	20° or more troughed idlers
Idler spacing	Minimum of 610 mm (24 inch)
Calibration weight capacity	Up to 340 kg (750 lb)
Crank arm	
Mechanical advantage	20:1
Number of revolutions required for raising or lowering	12
Mounting dimensions	See reverse for standard and heavy-duty MUS, MCS, and MSI/MMI belt scales
Approvals	
Motorized option	The MWL is in compliance with directive 98/37/EC, CE, RCM CE, RCM, EAC, KCC, CSA _{C/US}

Selection and ordering data		Article No.	Article No.	
Milltronics MWL weight lifter A mechanical calibration weight lifter for MSI, MMI, MCS, and MUS belt scale ¹⁾ For use with MSI, ensure MSI fabrication option 4 1 is selected.		7MH7218-	Milltronics MWL weight lifter A mechanical calibration weight lifter for MSI, MMI, MCS, and MUS belt scale ¹⁾ For use with MSI, ensure MSI fabrication option 4 1 is selected.	
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.				
Actuation				
Manually	1			
Belt width and 'A' dimension				
18 inch, 'A'=27 inch (686 mm)	AA		65 inch, 'A'=74 inch (1 880 mm)	CF
19 inch, 'A'=28 inch (711 mm)	AB		66 inch, 'A'=75 inch (1 905 mm)	CG
20 inch, 'A'=29 inch (737 mm)	AC		67 inch, 'A'=76 inch (1 930 mm)	CH
21 inch, 'A'=30 inch (762 mm)	AD		68 inch, 'A'=77 inch (1 956 mm)	CJ
22 inch, 'A'=31 inch (787 mm)	AE		69 inch, 'A'=78 inch (1 981 mm)	CK
23 inch, 'A'=32 inch (813 mm)	AF		70 inch, 'A'=79 inch (2 007 mm)	CL
24 inch, 'A'=33 inch (838 mm)	AG		71 inch, 'A'=80 inch (2 032 mm)	CM
25 inch, 'A'=34 inch (864 mm)	AH		72 inch, 'A'=81 inch (2 057 mm)	CN
26 inch, 'A'=35 inch (889 mm)	AJ		73 inch, 'A'=82 inch (2 083 mm)	CP
27 inch, 'A'=36 inch (914 mm)	AK		74 inch, 'A'=83 inch (2 108 mm)	CQ
28 inch, 'A'=37 inch (940 mm)	AL		75 inch, 'A'=84 inch (2 134 mm)	CR
29 inch, 'A'=38 inch (965 mm)	AM		76 inch, 'A'=85 inch (2 159 mm)	CS
30 inch, 'A'=39 inch (991 mm)	AN		77 inch, 'A'=86 inch (2 184 mm)	CT
31 inch, 'A'=40 inch (1 016 mm)	AP		78 inch, 'A'=87 inch (2 210 mm)	CU
32 inch, 'A'=41 inch (1 041 mm)	AQ		79 inch, 'A'=88 inch (2 235 mm)	CV
33 inch, 'A'=42 inch (1 067 mm)	AR		80 inch, 'A'=89 inch (2 261 mm)	CW
34 inch, 'A'=43 inch (1 092 mm)	AS		81 inch, 'A'=90 inch (2 286 mm)	DA
35 inch, 'A'=44 inch (1 118 mm)	AT		82 inch, 'A'=91 inch (2 311 mm)	DB
36 inch, 'A'=45 inch (1 143 mm)	AU		83 inch, 'A'=92 inch (2 337 mm)	DC
37 inch, 'A'=46 inch (1 168 mm)	AV		84 inch, 'A'=93 inch (2 362 mm)	DD
38 inch, 'A'=47 inch (1 194 mm)	AW		85 inch, 'A'=94 inch (2 388 mm)	DE
39 inch, 'A'=48 inch (1 219 mm)	BA		86 inch, 'A'=95 inch (2 413 mm)	DF
40 inch, 'A'=49 inch (1 245 mm)	BB		87 inch, 'A'=96 inch (2 438 mm)	DG
41 inch, 'A'=50 inch (1 270 mm)	BC		88 inch, 'A'=97 inch (2 464 mm)	DH
42 inch, 'A'=51 inch (1 295 mm)	BD		89 inch, 'A'=98 inch (2 489 mm)	DJ
43 inch, 'A'=52 inch (1 321 mm)	BE		90 inch, 'A'=99 inch (2 515 mm)	DK
44 inch, 'A'=53 inch (1 346 mm)	BF		91 inch, 'A'=100 inch (2 540 mm)	DL
45 inch, 'A'=54 inch (1 372 mm)	BG		92 inch, 'A'=101 inch (2 565 mm)	DM
46 inch, 'A'=55 inch (1 397 mm)	BH		93 inch, 'A'=102 inch (2 591 mm)	DN
47 inch, 'A'=56 inch (1 422 mm)	BJ		94 inch, 'A'=103 inch (2 616 mm)	DP
48 inch, 'A'=57 inch (1 448 mm)	BK		95 inch, 'A'=104 inch (2 642 mm)	DQ
49 inch, 'A'=58 inch (1 473 mm)	BL		96 inch, 'A'=105 inch (2 667 mm)	DR
50 inch, 'A'=59 inch (1 499 mm)	BM		No width parts ³⁾	XX
51 inch, 'A'=60 inch (1 524 mm)	BN		Weight type	
52 inch, 'A'=61 inch (1 549 mm)	BP		None	00
53 inch, 'A'=62 inch (1 575 mm)	BQ		For use with flat bar weights (weights not included)	11
54 inch, 'A'=63 inch (1 600 mm)	BR		<u>Width based on belt width</u>	
55 inch, 'A'=64 inch (1 626 mm)	BS		3 inch integrated round bar weight (18 ... 29 inch, 15.9 ... 22.7 kg)	31
56 inch, 'A'=65 inch (1 651 mm)	BT		3 inch integrated round bar weight (30 ... 41 inch, 26.8 ... 33.6 kg)	32
57 inch, 'A'=66 inch (1 676 mm)	BU		3 inch integrated round bar weight (42 ... 53 inch, 37.7 ... 44.5 kg)	33
58 inch, 'A'=67 inch (1 702 mm)	BV		3 inch integrated round bar weight (54 ... 65 inch, 48.6 ... 58.6 kg)	34
59 inch, 'A'=68 inch (1 727 mm)	BW		3 inch integrated round bar weight (66 ... 77 inch, 59.5 ... 69.5 kg)	35
60 inch, 'A'=69 inch (1 753 mm)	CA		3 inch integrated round bar weight (78 ... 89 inch, 70.4 ... 80.4 kg)	36
61 inch, 'A'=70 inch (1 778 mm)	CB		3 inch integrated round bar weight (90 ... 96 inch, 81.3 ... 86.8 kg)	37
62 inch, 'A'=71 inch (1 803 mm)	CC		4 inch integrated round bar weight (18 ... 29 inch, 23.3 ... 34.3 kg)	41
63 inch, 'A'=72 inch (1 829 mm)	CD			
64 inch, 'A'=73 inch (1 854 mm)	CE			

Belt Weighing Accessories

Calibration weight lifter Milltronics MWL

Selection and ordering data

Milltronics MWL weight lifter

A mechanical calibration weight lifter for MSI, MMI, MCS, and MUS belt scale¹⁾

For use with MSI, ensure MSI fabrication option 4 1 is selected.

4 inch integrated round bar weight
(30 ... 41 inch, 42.7 ... 53.7 kg)

4 inch integrated round bar weight
(42 ... 53 inch, 62.1 ... 73.1 kg)

4 inch integrated round bar weight
(54 ... 65 inch, 81.5 ... 99.3 kg)

4 inch integrated round bar weight
(66 ... 77 inch, 100.9 ... 118.6 kg)

4 inch integrated round bar weight
(78 ... 89 inch, 120.3 ... 138.0 kg)

4 inch integrated round bar weight
(90 ... 96 inch, 139.6 ... 149.3 kg)

5 inch integrated round bar weight
(18 ... 29 inch, 32.9 ... 49.3 kg)

5 inch integrated round bar weight
(30 ... 41 inch, 63.2 ... 79.6 kg)

5 inch integrated round bar weight
(42 ... 53 inch, 93.5 ... 109.9 kg)

5 inch integrated round bar weight
(54 ... 65 inch, 123.7 ... 151.5 kg)

5 inch integrated round bar weight
(66 ... 77 inch, 154.0 ... 181.8 kg)

5 inch integrated round bar weight
(78 ... 89 inch, 184.3 ... 212.1 kg)

5 inch integrated round bar weight
(90 ... 96 inch, 214.6 ... 229.7 kg)

6 inch integrated round bar weight
(18 ... 29 inch, 44.5 ... 67.6 kg)

6 inch integrated round bar weight
(30 ... 41 inch, 88.2 ... 111.2 kg)

6 inch integrated round bar weight
(42 ... 53 inch, 131.8 ... 154.8 kg)

6 inch integrated round bar weight
(54 ... 65 inch, 175.4 ... 215.3 kg)

6 inch integrated round bar weight
(66 ... 77 inch, 219.0 ... 258.9 kg)

6 inch integrated round bar weight
(78 ... 89 inch, 262.6 ... 302.5 kg)

6 inch integrated round bar weight
(90 ... 96 inch, 306.2 ... 328.0 kg)

Fabrication

Standard, C5-M rated polyester painted mild steel

Electro galvanized mild steel

Other materials available upon request.

Article No.

7MH7218-

4 2

4 3

4 4

4 5

4 6

4 7

5 1

5 2

5 3

5 4

5 5

5 6

5 7

6 1

6 2

6 3

6 4

6 5

6 6

6 7

1

2

Order Code

Further designs

Please add **"-Z"** to article no. and specify order code(s).

Stainless steel tag [69 x 38 mm (2.7 x 1.5 inch)],
Measuring-point number / identification
(max 27 characters), specify in plain text.

Manufacturer's test certificate:
According to EN 10204-2.2

Operating instruction

All literature is available to download for free, in a
range of languages, at

<http://www.siemens.com/weighing/documentation>

Spare parts

MWL handle shaft extension, 3.75 inch (95 mm)

MWL module LH unit

MWL module RH unit

MWL handle

MWL retrofit kit (for Milltronics MSI, MMI belt
scales)

MWL retrofit kit galvanized (for Milltronics MSI,
MMI belt scales)

MWL retrofit kit (for Milltronics MCS belt scales)

MWL handle shaft extension galvanized
[3.75 inch (95 mm)]

MWL module LH unit galvanized

MWL module RH unit galvanized

MWL handle galvanized

Y15

C11

Article No.

7MH7726-1AM

7MH7723-1GU

7MH7723-1GV

7MH7723-1GX

7MH7723-1FW

7MH7723-1JT

7MH7723-1HA

7MH7723-1JS

7MH7723-1HK



7MH7723-1HL

7MH7723-1HM

¹⁾ One MWL is required for each scale (MMI-2 requires 2 MWL).

²⁾ Select motor mounting, order code options M30 or M31.

³⁾ Available with weight type option 00 only.

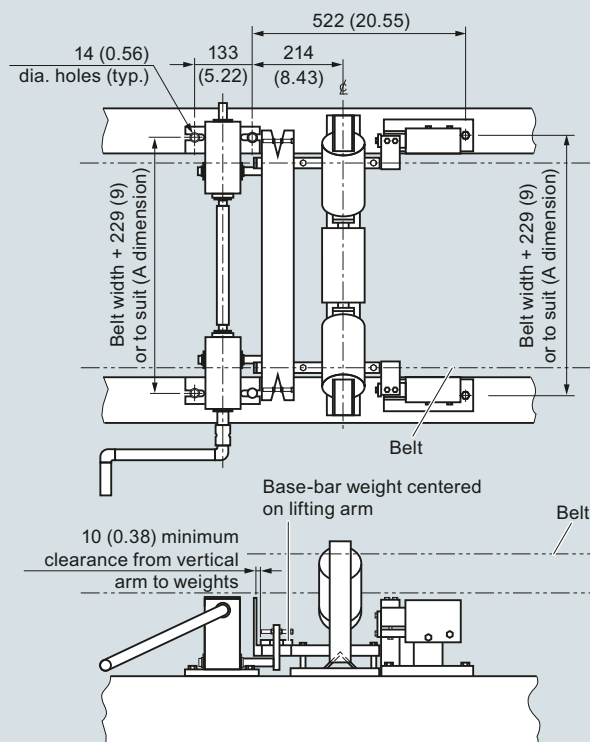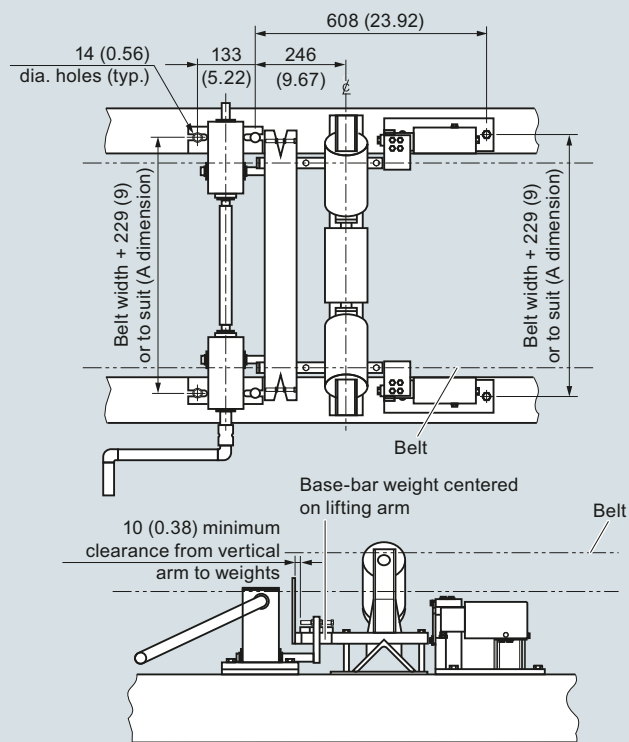
Dimensional drawings
MWL with MUS - STD Standard Duty Belt Scale

MWL with MUS - HD Heavy Duty Belt Scale


MWL, dimensions in mm (inch)

Belt Weighing

Accessories

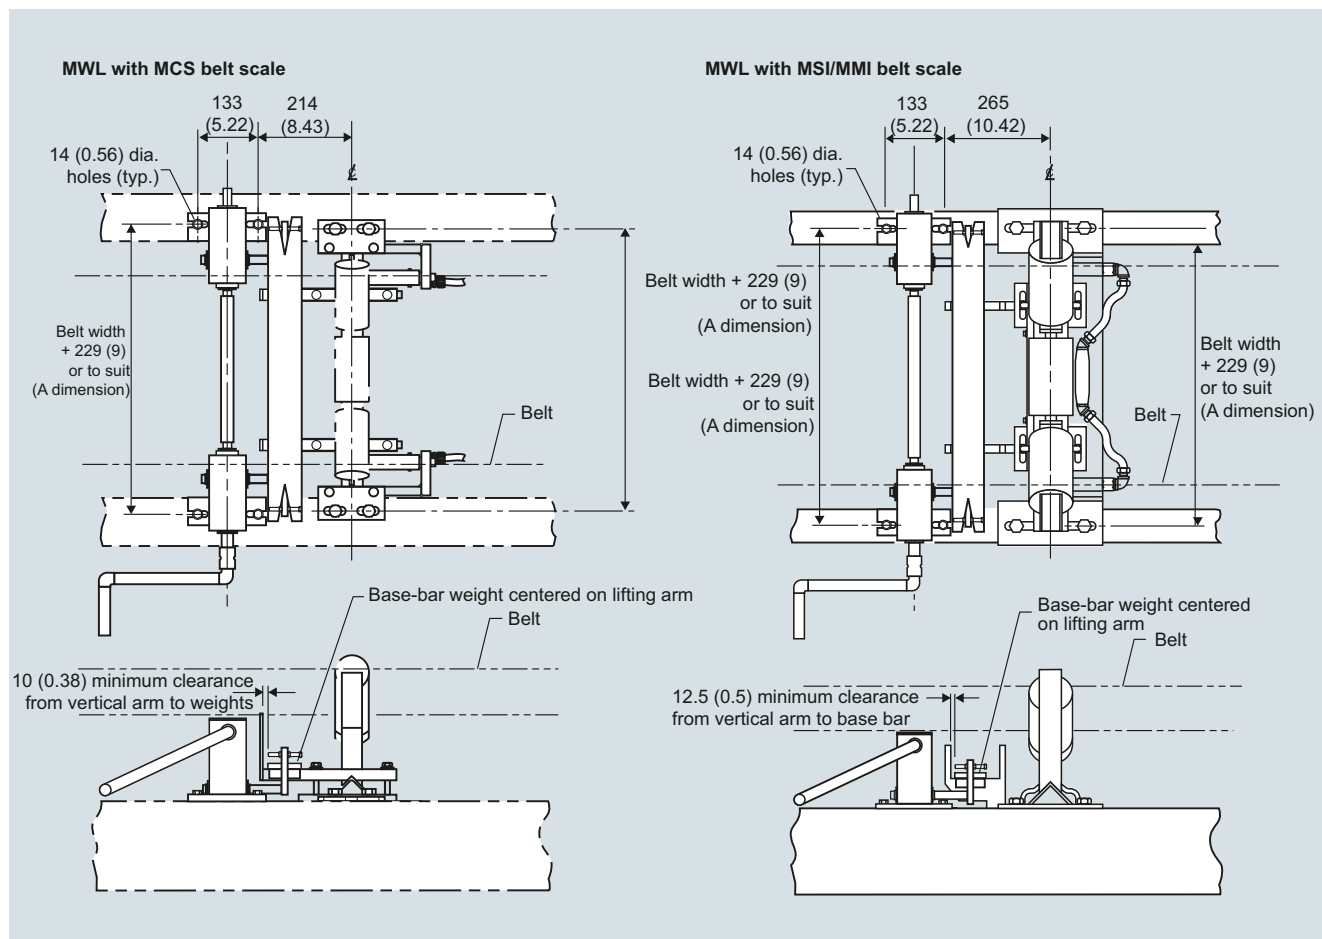Calibration weight lifter Milltronics MWL



MWL, dimensions in mm (inch)

Overview

Roller test chains are used for belt scale calibration when material tests are not practical. All test chains are bushed. Minimum length is 4 feet (1.2 m).

Selection and ordering data

Article No.

Milltronics flat bar calibration weights

Designed for use with Milltronics belt scales.
 Length of bar weight is A dimension minus
 3 inch (76 mm). Listed weight is an approximation.

7MH7127-

➤ Click on the Article No. for the online
 configuration in the PIA Life Cycle Portal.

Bar width, belt width and A dimension, weight

3 inch, 18 inch, A=27 inch (686 mm), 4.63 kg	1 AA
3 inch, 24 inch, A=33 inch (838 mm), 5.78 kg	1 AG
3 inch, 30 inch, A=39 inch (991 mm), 6.94 kg	1 AN
3 inch, 36 inch, A=45 inch (1 143 mm), 8.10 kg	1 AU
3 inch, 42 inch, A=51 inch (1 295 mm), 9.25 kg	1 BD
3 inch, 48 inch, A=57 inch (1 448 mm), 10.41 kg	1 BK
3 inch, 54 inch, A=63 inch (1 600 mm), 11.57 kg	1 BR
3 inch, 60 inch, A=69 inch (1 753 mm), 12.73 kg	1 CA
3 inch, 66 inch, A=75 inch (1 905 mm), 13.89 kg	1 CG
3 inch, 72 inch, A=81 inch (2 057 mm), 15.05 kg	1 CN
3 inch, 78 inch, A=87 inch (2 210 mm), 16.21 kg	1 CU
3 inch, 84 inch, A=93 inch (2 362 mm), 17.37 kg	1 DD
3 inch, 90 inch, A=99 inch (2 515 mm), 18.53 kg	1 DK
3 inch, 96 inch, A=105 inch (2 667 mm), 19.69 kg	1 DR
4 inch, 18 inch, A=27 inch (686 mm), 6.17 kg	2 AA
4 inch, 24 inch, A=33 inch (838 mm), 7.71 kg	2 AG
4 inch, 30 inch, A=39 inch (991 mm), 9.26 kg	2 AN
4 inch, 36 inch, A=45 inch (1 143 mm), 10.80 kg	2 AU
4 inch, 42 inch, A=51 inch (1 295 mm), 12.34 kg	2 BD
4 inch, 48 inch, A=57 inch (1 448 mm), 13.89 kg	2 BK
4 inch, 54 inch, A=63 inch (1 600 mm), 15.42 kg	2 BR
4 inch, 60 inch, A=69 inch (1 753 mm), 16.97 kg	2 CA
4 inch, 66 inch, A=75 inch (1 905 mm), 18.52 kg	2 CG
4 inch, 72 inch, A=81 inch (2 057 mm), 20.07 kg	2 CN
4 inch, 78 inch, A=87 inch (2 210 mm), 21.62 kg	2 CU
4 inch, 84 inch, A=93 inch (2 362 mm), 23.17 kg	2 DD
4 inch, 90 inch, A=99 inch (2 515 mm), 24.72 kg	2 DK
4 inch, 96 inch, A=105 inch (2 667 mm), 26.27 kg	2 DR

Fabrication

Standard, C5-M rated polyester painted mild steel

1

Belt Weighing

Accessories

Test chain

Overview



Roller test chains are used for belt scale calibration when material tests are not practical. All test chains are bushed. Minimum length is 4 feet (1.2 m).

Benefits

- Heavy-duty design for rugged applications and long life
- Precision machined components for accurate calibration
- Bushed rollers to ensure rotation during calibration
- Alternative to material tests when they are not possible

Application

Milltronics calibration test chains provide simulated material flow on a conveyor belt for use with belt scale calibration. Designed for use in environments where material tests cannot be performed, test chains come in a variety of capacity options for use in any application. They ensure constant and uniform belt loading similar to material being conveyed, and can be stored on a storage reel for quick and easy application. The use of a calibration test chain ensures that production totals are guaranteed.

Technical specifications

Test chain

Mode of operation

Principle of operation Rides on carrying side of belt to simulate material loading

Medium conditions

Max. ambient temperature 65 °C (150 °F)

Design

Belt loading to meet any application 5 lb/ft (7.4 kg/m) ... 100 lb/ft (148.8 kg/m)

Length

Made to suit conveyor design

Idler

Flat to 45° troughed idlers

Max belt speed

5 m/s 1 000 fpm

Mounting

Connected to conveyor at start and end of chain at both sides for uniform loading.

Storage and application with test chain storage reel.

Approvals

CE, RCM, EAC, KCC

Selection and ordering data

Article No.

Article No.

Milltronics test chains

Roller test chains are used for belt scale calibration when material tests are not practical. All test chains are bushed. Minimum length is 4 feet (1.2 m).

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

5 lb/ft (7.4 kg/m), 6 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)
8 ... 11 ft (2.4 ... 3.4 m)
12 ... 15 ft (3.7 ... 4.6 m)
16 ... 19 ft (4.9 ... 5.8 m)
20 ... 23 ft (6.1 ... 7.0 m)
24 ... 27 ft (7.3 ... 8.2 m)
28 ... 31 ft (8.5 ... 9.4 m)
32 ... 35 ft (9.8 ... 10.7 m)

7.5 lb/ft (11.2 kg/m), 6 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)
8 ... 11 ft (2.4 ... 3.4 m)
12 ... 15 ft (3.7 ... 4.6 m)
16 ... 19 ft (4.9 ... 5.8 m)
20 ... 23 ft (6.1 ... 7.0 m)
24 ... 27 ft (7.3 ... 8.2 m)
28 ... 31 ft (8.5 ... 9.4 m)
32 ... 35 ft (9.8 ... 10.7 m)

10 lb/ft (14.9 kg/m), 4 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)
8 ... 11 ft (2.4 ... 3.4 m)
12 ... 15 ft (3.7 ... 4.6 m)
16 ... 19 ft (4.9 ... 5.8 m)
20 ... 23 ft (6.1 ... 7.0 m)
24 ... 27 ft (7.3 ... 8.2 m)
28 ... 31 ft (8.5 ... 9.4 m)
32 ... 35 ft (9.8 ... 10.7 m)

15 lb/ft (22.3 kg/m), 4 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)
8 ... 11 ft (2.4 ... 3.4 m)
12 ... 15 ft (3.7 ... 4.6 m)
16 ... 19 ft (4.9 ... 5.8 m)
20 ... 23 ft (6.1 ... 7.0 m)
24 ... 27 ft (7.3 ... 8.2 m)
28 ... 31 ft (8.5 ... 9.4 m)
32 ... 35 ft (9.8 ... 10.7 m)

20 lb/ft (29.8 kg/m), 4 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)
8 ... 11 ft (2.4 ... 3.4 m)
12 ... 15 ft (3.7 ... 4.6 m)
16 ... 19 ft (4.9 ... 5.8 m)
20 ... 23 ft (6.1 ... 7.0 m)
24 ... 27 ft (7.3 ... 8.2 m)
28 ... 31 ft (8.5 ... 9.4 m)
32 ... 35 ft (9.8 ... 10.7 m)

7MH7161-

0 0

AA 1

AA 2

AA 3

AA 4

AA 5

AA 6

AA 7

AA 8

BB 1

BB 2

BB 3

BB 4

BB 5

BB 6

BB 7

BB 8

CC 1

CC 2

CC 3

CC 4

CC 5

CC 6

CC 7

CC 8

DD 1

DD 2

DD 3

DD 4

DD 5

DD 6

DD 7

DD 8

EE 1

EE 2

EE 3

EE 4

EE 5

EE 6

EE 7

EE 8

Milltronics test chains

Roller test chains are used for belt scale calibration when material tests are not practical. All test chains are bushed. Minimum length is 4 feet (1.2 m).

25 lb/ft (37.2 kg/m), 4 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)
8 ... 11 ft (2.4 ... 3.4 m)
12 ... 15 ft (3.7 ... 4.6 m)
16 ... 19 ft (4.9 ... 5.8 m)
20 ... 23 ft (6.1 ... 7.0 m)
24 ... 27 ft (7.3 ... 8.2 m)
28 ... 31 ft (8.5 ... 9.4 m)
32 ... 35 ft (9.8 ... 10.7 m)

30 lb/ft (44.6 kg/m), 4 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)
8 ... 11 ft (2.4 ... 3.4 m)
12 ... 15 ft (3.7 ... 4.6 m)
16 ... 19 ft (4.9 ... 5.8 m)
20 ... 23 ft (6.1 ... 7.0 m)
24 ... 27 ft (7.3 ... 8.2 m)
28 ... 31 ft (8.5 ... 9.4 m)
32 ... 35 ft (9.8 ... 10.7 m)

35 lb/ft (52.1 kg/m), 4 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)
8 ... 11 ft (2.4 ... 3.4 m)
12 ... 15 ft (3.7 ... 4.6 m)
16 ... 19 ft (4.8 ... 5.8 m)
20 ... 23 ft (6.1 ... 7.0 m)
24 ... 27 ft (7.3 ... 8.2 m)
28 ... 31 ft (8.5 ... 9.4 m)
32 ... 35 ft (9.8 ... 10.7 m)

40 lb/ft (59.5 kg/m), 4 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)
8 ... 11 ft (2.4 ... 3.4 m)
12 ... 15 ft (3.7 ... 4.6 m)
16 ... 19 ft (4.9 ... 5.8 m)
20 ... 23 ft (6.1 ... 7.0 m)
24 ... 27 ft (7.3 ... 8.2 m)
28 ... 31 ft (8.5 ... 9.4 m)
32 ... 35 ft (9.8 ... 10.7 m)

45 lb/ft (67.0 kg/m), 4 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)
8 ... 11 ft (2.4 ... 3.4 m)
12 ... 15 ft (3.7 ... 4.6 m)
16 ... 19 ft (4.9 ... 5.8 m)
20 ... 23 ft (6.1 ... 7.0 m)
24 ... 27 ft (7.3 ... 8.2 m)
28 ... 31 ft (8.5 ... 9.4 m)
32 ... 35 ft (9.8 ... 10.7 m)

7MH7161-

0 0

FF 1

FF 2

FF 3

FF 4

FF 5

FF 6

FF 7

FF 8

GG 1

GG 2

GG 3

GG 4

GG 5

GG 6

GG 7

GG 8

HH 1

HH 2

HH 3

HH 4

HH 5

HH 6

HH 7

HH 8

JJ 1

JJ 2

JJ 3

JJ 4

JJ 5

JJ 6

JJ 7

JJ 8

KK 1

KK 2

KK 3

KK 4

KK 5

KK 6

KK 7

KK 8

Belt Weighing

Accessories

Test chain

Selection and ordering data

Milltronics test chains

Roller test chains are used for belt scale calibration when material tests are not practical. All test chains are bushed. Minimum length is 4 feet (1.2 m).

↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

50 lb/ft (74.4 kg/m), 4 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)

8 ... 11 ft (2.4 ... 3.4 m)

12 ... 15 ft (3.7 ... 4.6 m)

16 ... 19 ft (4.9 ... 5.8 m)

20 ... 23 ft (6.1 ... 7.0 m)

24 ... 27 ft (7.3 ... 8.2 m)

28 ... 31 ft (8.5 ... 9.4 m)

32 ... 35 ft (9.8 ... 10.7 m)

60 lb/ft (89.3 kg/m), 6 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)

8 ... 11 ft (2.4 ... 3.4 m)

12 ... 15 ft (3.7 ... 4.6 m)

16 ... 19 ft (4.9 ... 5.8 m)

20 ... 23 ft (6.1 ... 7.0 m)

24 ... 27 ft (7.3 ... 8.2 m)

28 ... 31 ft (8.5 ... 9.4 m)

32 ... 35 ft (9.8 ... 10.7 m)

70 lb/ft (104.2 kg/m), 6 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)

8 ... 11 ft (2.4 ... 3.4 m)

12 ... 15 ft (3.7 ... 4.6 m)

16 ... 19 ft (4.9 ... 5.8 m)

20 ... 23 ft (6.1 ... 7.0 m)

24 ... 27 ft (7.3 ... 8.2 m)

28 ... 31 ft (8.5 ... 9.4 m)

32 ... 35 ft (9.8 ... 10.7 m)

80 lb/ft (119.1 kg/m), 6 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)

8 ... 11 ft (2.4 ... 3.4 m)

12 ... 15 ft (3.7 ... 4.6 m)

16 ... 19 ft (4.9 ... 5.8 m)

20 ... 23 ft (6.1 ... 7.0 m)

24 ... 27 ft (7.3 ... 8.2 m)

28 ... 31 ft (8.5 ... 9.4 m)

32 ... 35 ft (9.8 ... 10.7 m)

90 lb/ft (133.9 kg/m), 6 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)

8 ... 11 ft (2.4 ... 3.4 m)

12 ... 15 ft (3.7 ... 4.6 m)

16 ... 19 ft (4.9 ... 5.8 m)

20 ... 23 ft (6.1 ... 7.0 m)

24 ... 27 ft (7.3 ... 8.2 m)

28 ... 31 ft (8.5 ... 9.4 m)

32 ... 35 ft (9.8 ... 10.7 m)

Article No.

7MH7161-

0 0

LL 1

LL 2

LL 3

LL 4

LL 5

LL 6

LL 7

LL 8

NN 1

NN 2

NN 3

NN 4

NN 5

NN 6

NN 7

NN 8

PP 1

PP 2

PP 3

PP 4

PP 5

PP 6

PP 7

PP 8

QQ 1

QQ 2

QQ 3

QQ 4

QQ 5

QQ 6

QQ 7

QQ 8

RR 1

RR 2

RR 3

RR 4

RR 5

RR 6

RR 7

RR 8

Article No.

7MH7161-

0 0

SS 1

SS 2

SS 3

SS 4

SS 5

SS 6

SS 7

SS 8

Order Code

Y01

Milltronics test chains

Roller test chains are used for belt scale calibration when material tests are not practical. All test chains are bushed. Minimum length is 4 feet (1.2 m).

100 lb/ft (148.8 kg/m), 6 inch pitch

4 ... 7 ft (1.2 ... 2.1 m)

8 ... 11 ft (2.4 ... 3.4 m)

12 ... 15 ft (3.7 ... 4.6 m)

16 ... 19 ft (4.9 ... 5.8 m)

20 ... 23 ft (6.1 ... 7.0 m)

24 ... 27 ft (7.3 ... 8.2 m)

28 ... 31 ft (8.5 ... 9.4 m)

32 ... 35 ft (9.8 ... 10.7 m)

Further models

Please add **"-Z"** to article no. and specify order codes(s)



Total length

Enter the total length in plain text description:
Y01: Total length ... mm (must be equivalent to whole feet, e.g. 1 ft = 304.8 mm)

Operating instructions

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/weighing/documentation>

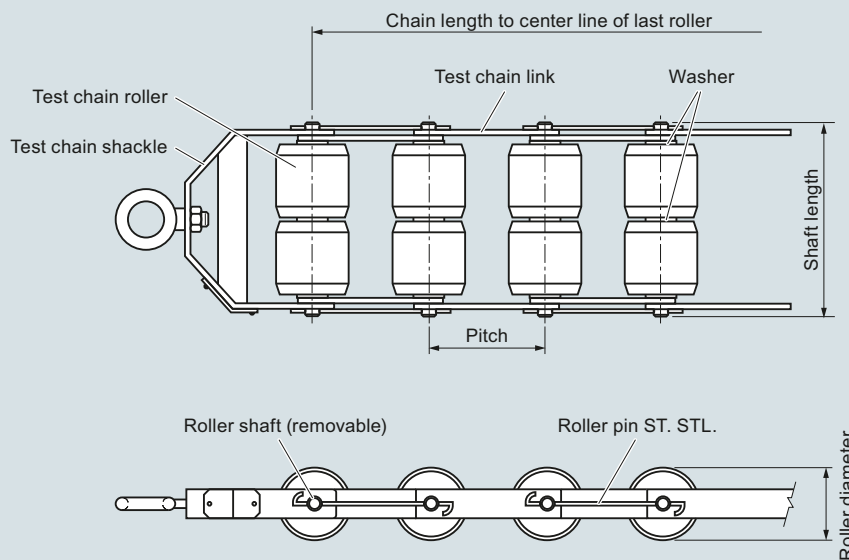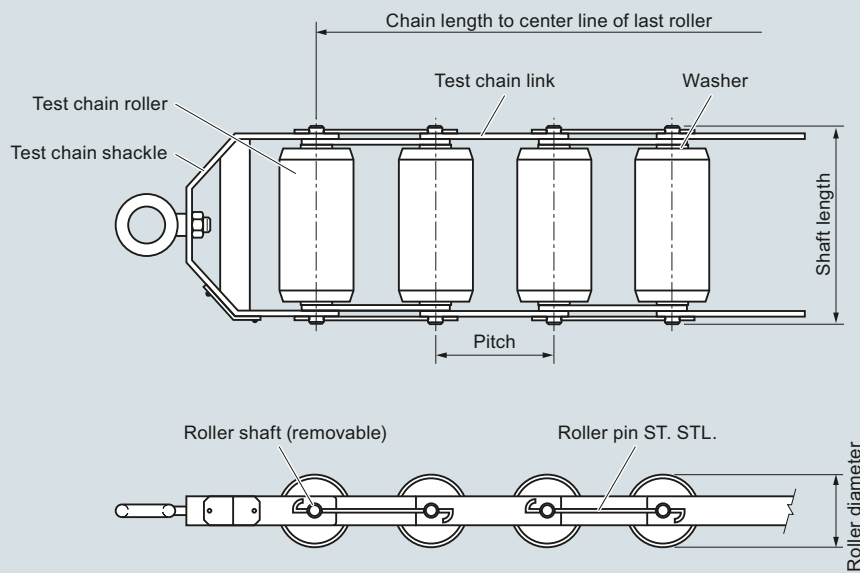Dimensional drawings**Double roller****Single roller**


Test chain dimensions

Belt Weighing

Accessories

Test chain storage reel

Overview

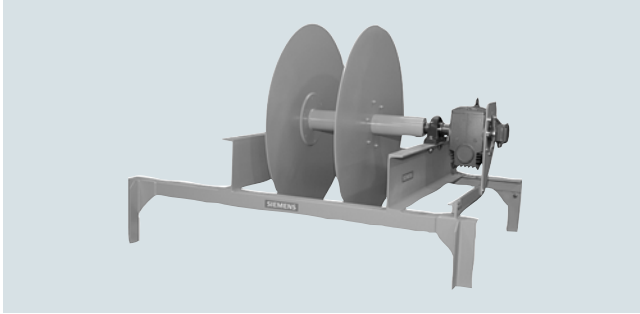

Test chain storage reels are used to store roller test chains. All test chain storage reels come with a geared brake motor.

Benefits

- Mounts to existing conveyor structure above belt
- Motorized application and retraction of test chains for calibration
- Fast and easy calibration

Application

Milltronics calibration test chain storage reels provide motorized application and retraction of test chains. Complete with an AC motorized storage reel, test chain reels ensure safe and quick use of calibration test chains. Designed for use in environments where material tests cannot be performed, test chain storage reels are available in any belt width to meet existing customer conveyor geometry. For linearity tests dual compartment reels are available for different chain weight calibration. Test chain storage reels have a brake integral to the motor ensuring that test chains do not un-reel during power outages or material running.

Technical specifications

Test chain storage reel	
Medium conditions	
Operating temperature	-10 ... +60 °C (14 ... 140 °F)
Design	<ul style="list-style-type: none"> • C5-M rated polyester painted structural steel • 10 mm (3/8 inch) galvanized rope provided for chain spooling • Self-aligning pillow block bearings
Reel	Up to 1 524 mm (60 inch) Chain application at 7 ... 10 RPM
Drive motor	TEFC, AC, three phase motor with shaft mounted helical bevel gear reducer
Approvals	CE, RCM, EAC, KCC

Selection and ordering data

Article No.

Test chain storage reel

7MH7163-

Test chain storage reels are used to store roller test chains. All test chain storage reels come with a geared brake motor.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Compartment size

5 inch (127 mm) for chain sizes: 5 lb/ft (7.4 kg/m), 10 lb/ft (14.9 kg/m)

0

6 inch (152 mm) for chain sizes: 7.5 lb/ft (11.2 kg/m)

1

7 inch (178 mm) for chain sizes: 15 lb/ft (22.3 kg/m), 20 lb/ft (29.8 kg/m), 25 lb/ft (37.2 kg/m)

2

8 inch (203 mm) for chain sizes: 30 lb/ft (44.6 kg/m), 35 lb/ft (52.1 kg/m)

3

11 inch (279 mm) for chain sizes: 40 lb/ft (59.5 kg/m), 45 lb/ft (67.0 kg/m), 50 lb/ft (74.4 kg/m)

4

12 inch (305 mm) for chain sizes: 55 lb/ft (81.9 kg/m), 60 lb/ft (89.3 kg/m)

5

13 inch (330 mm) for chain sizes: 70 lb/ft (104.2 kg/m)

6

14 inch (356 mm) for chain sizes: 80 lb/ft (119.1 kg/m), 100 lb/ft (148.8 kg/m)

7

16 inch (406 mm) for chain sizes: 90 lb/ft (133.9 kg/m)

8

C dimension

25 inch (635 mm)

AA

26 inch (660 mm)

AB

27 inch (686 mm)

AC

28 inch (711 mm)

AD

29 inch (737 mm)

AE

30 inch (762 mm)

AF

31 inch (787 mm)

AG

32 inch (813 mm)

AH

33 inch (838 mm)

AJ

34 inch (864 mm)

AK

35 inch (889 mm)

AL

36 inch (914 mm)

AM

37 inch (940 mm)

AN

38 inch (965 mm)

AP

39 inch (991 mm)

AQ

40 inch (1 016 mm)

AR

41 inch (1 041 mm)

AS

42 inch (1 067 mm)

AT

43 inch (1 092 mm)

AU

44 inch (1 118 mm)

AV

45 inch (1 143 mm)

AW

46 inch (1 168 mm)

BA

47 inch (1 194 mm)

BB

48 inch (1 219 mm)

BC

49 inch (1 245 mm)

BD

50 inch (1 270 mm)

BE

51 inch (1 295 mm)

BF

52 inch (1 321 mm)

BG

53 inch (1 346 mm)



BH

54 inch (1 372 mm)

BJ

55 inch (1 397 mm)

BK


Selection and ordering data		Article No.	Article No.
Test chain storage reel	7MH7163-	Test chain storage reel	7MH7163-
Test chain storage reels are used to store roller test chains. All test chain storage reels come with a geared brake motor.		Test chain storage reels are used to store roller test chains. All test chain storage reels come with a geared brake motor.	
56 inch (1 422 mm)	BL	3 Phase motor voltage	
57 inch (1 448 mm)	BM	230/460 V 60 Hz	1
58 inch (1 473 mm)	BN	200/400 V 50 Hz	2
59 inch (1 499 mm)	BP	575 V 60 Hz	3
60 inch (1 524 mm)	BQ	190/380 V 50 Hz	4
61 inch (1 549 mm)	BR	190/380 V 60 Hz	5
62 inch (1 575 mm)	BS	220 V 60 Hz	6
63 inch (1 600 mm)	BT	415 V 50 Hz	7
64 inch (1 626 mm)	BU	Reel type	
65 inch (1 651 mm)	BV	Single compartment for 1 calibration test chain	0
66 inch (1 676 mm)	BW	Double compartment for 2 calibration test chains	1
67 inch (1 702 mm)	CA	Reel diameter/motor mount location	
68 inch (1 727 mm)	CB	36 inch (914 mm) / right hand access	0
69 inch (1 753 mm)	CC	42 inch (1 067 mm) / right hand access	1
70 inch (1 778 mm)	CD	48 inch (1 219 mm) / right hand access	2
71 inch (1 803 mm)	CE	60 inch (1 372 mm) / right hand access	3
72 inch (1 829 mm)	CF	36 inch (914 mm) / left hand access	4
73 inch (1 854 mm)	CG	42 inch (1 067 mm) / left hand access	5
74 inch (1 880 mm)	CH	48 inch (1 219 mm) / left hand access	6
75 inch (1 905 mm)	CJ	60 inch (1 372 mm) / left hand access	7
76 inch (1 930 mm)	CK	Motor power	
77 inch (1 956 mm)	CL	0.75 HP (0.56 kW)	A
78 inch (1 981 mm)	CM	1 HP (0.75 kW)	B
79 inch (2 007 mm)	CN	1.5 HP (1.12 kW)	C
80 inch (2 032 mm)	CP	2 HP (1.5 kW)	D
81 inch (2 057 mm)	CQ	3 HP (2.24 kW)	E
82 inch (2 083 mm)	CR	5 HP (3.73 kW)	F
83 inch (2 108 mm)	CS	7.5 HP (5.59 kW)	G
84 inch (2 134 mm)	CT	10 HP (7.5 kW)	H
85 inch (2 159 mm)	CU	15 HP (11.19 kW)	J
86 inch (2 184 mm)	CV	20 HP (14.91 kW)	K
87 inch (2 210 mm)	CW	Operating instructions	
88 inch (2 235 mm)	DA	All literature is available to download for free, in a range of languages, at	
89 inch (2 261 mm)	DB	http://www.siemens.com/weighing/documentation	
90 inch (2 286 mm)	DC	Accessories	
91 inch (2 311 mm)	DD	Local operator station: forward, reverse, e-stop, off/on	7MH7723-1JY
92 inch (2 337 mm)	DE	Note: motor starter and voltage transformer required for use with controller, 120 V AC required for controller	
93 inch (2 362 mm)	DF		
94 inch (2 388 mm)	DG		
95 inch (2 413 mm)	DH		
96 inch (2 438 mm)	DJ		
97 inch (2 464 mm)	DK		
98 inch (2 489 mm)	DL		
99 inch (2 515 mm)	DM		
100 inch (2 540 mm)	DN		
101 inch (2 565 mm)	DP		
102 inch (2 591 mm)	DQ		
103 inch (2 616 mm)	DR		
104 inch (2 642 mm)	DS		
105 inch (2 667 mm)	DT		

Belt Weighing


Accessories

Test chain storage reel

Dimensional drawings

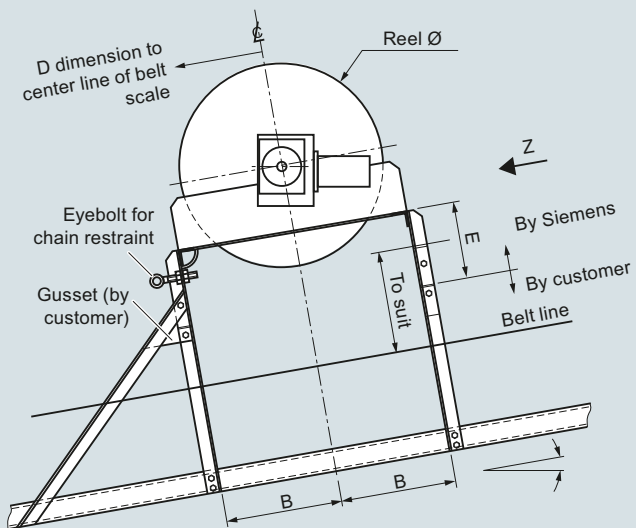

Reel Ø	B	E
915 (36)	520 (20.5)	340 (13.25)
1 070 (42)	600 (23.5)	340 (13.25)
1 220 (48)	670 (26.5)	340 (13.25)
1 520 (60)	830 (32.5)	450 (17.75)

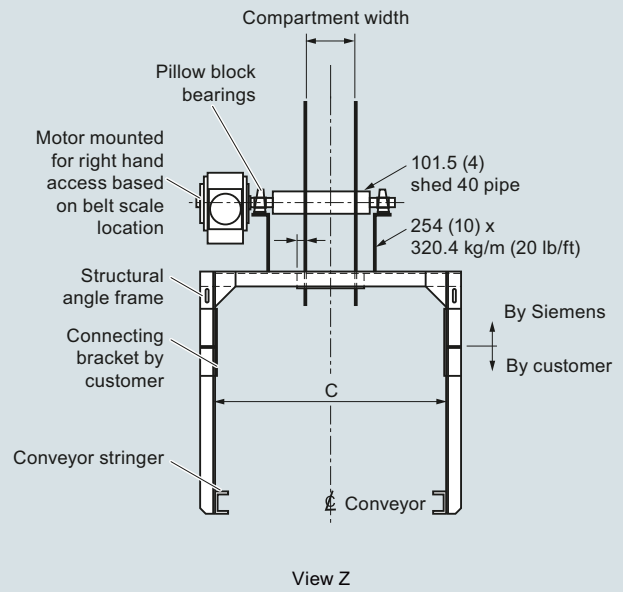

Milltronics test chain storage reel, dimension in mm (inch)

Overview



Return belt driven pulley provides rotation for shaft-driven speed sensors. 4.5 inch size is self-cleaning.

Benefits

- Heavy-duty design for high belt tension
- Self-cleaning 114 mm (4.5 inch) diameter option
- Steel drum 152 mm (6 inch) diameter option
- Steel drum 152 mm (6 inch) with 6 mm (¼ inch) rubber lagged option
- Spherical self-aligning pillow block bearings
- Fast installation, easy maintenance

Application

Milltronics bend pulleys provide constant belt contact for use with Siemens speed sensors. Designed for use in rugged operating environments common to mining, aggregates, cement, minerals, and other process industries. They ensure concentric speed sensor rotation to reduce pre-mature bearing failure. The use of a bend pulley driven speed sensor ensures no modification is required on any existing conveyor shaft. Options include stainless steel construction, epoxy painting, polymer bearings, self-cleaning style, and lagged style.

Technical specifications

Milltronics bend pulleys	
Typical application	Mining, aggregates, cement, minerals, and other process industries
Medium conditions	
Operating temperature	-40 ... +110 °C (-40 ... +230 °F)
Shaft material	Mild steel 316 (1.44) stainless steel, option
Pulleys	
Self-cleaning rubber disc style	114 mm (4.5 inch) diameter
Steel drum	152 mm (6 inch) diameter
Steel drum	152 mm (6 inch) diameter with 6 mm (¼ inch) rubber lagged option
Bearings	<ul style="list-style-type: none"> • Heavy-duty self-aligning pillow block bearings, standard • Polymer self-aligning pillow block bearings option
Belt speed	
Self-cleaning	1.79 m/s (350 fpm) max.
Drum	3 m/s (600 fpm)
Approvals	CE, RCM, EAC, KCC

Belt Weighing Accessories

Bend pulleys

Selection and ordering data

Article No.

Milltronics bend pulley, 4.5 inch and 6 inch diameter

Return belt driven pulley provides rotation for shaft-driven speed sensors. 4.5 inch size is self-cleaning.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Size

4.5 inch diameter self cleaning¹⁾

6 inch diameter

Belt width and 'A' dimension

18 inch, A=27 ... 29.5 inch (686 ... 749 mm),
20 inch, A=29 inch (737 mm)

24 inch, A=33 ... 35.5 inch (838 ... 901 mm)

30 inch, A=39 ... 41.5 inch (991 ... 1 054 mm)

36 inch, A=45 ... 47.5 inch (1 143 ... 1 206 mm)

42 inch, A=51 inch (1 295 mm)

48 inch, A=57 ... 59.5 inch (1 448 ... 1 511 mm)

54 inch, A=63 ... 65.5 inch (1 600 ... 1 663 mm)

60 inch, A=69 ... 71.5 inch (1 753 ... 1 816 mm)

66 inch, A=75 ... 77.5 inch (1 905 ... 1 968 mm)

500 mm, A=29 ... 31.5 inch (740 ... 800 mm)

650 mm, A=35 ... 37.6 inch (890 ... 954 mm)

800 mm, A=41 ... 43.5 inch (1 040 ... 1 104 mm)

800 mm, A=43 ... 45.4 inch (1 090 ... 1 154 mm)

1 000 mm, A=48.8 ... 51.3 inch (1 240 ... 1 304 mm)

1 200 mm, A=56.6 ... 59.2 inch (1 440 ... 1 504 mm)

1 400 mm, A=64.6 ... 67.1 inch (1 640 ... 1 704 mm)

1 450 mm, A=66.5 ... 69.0 inch (1 690 ... 1 754 mm)

1 600 mm, A=72.4 ... 74.9 inch (1 840 ... 1 904 mm)

Finish

Standard, C5-M rated polyester painted mild steel²⁾316 (1.4401) stainless steel³⁾316 (1.4401) stainless steel⁴⁾Epoxy painted⁵⁾Epoxy painted, with corrosion resistant bearings⁵⁾

Bearings

Imperial size

Metric size

No bearings

Operating instructions

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/weighing/documentation>

Article No.

7MH7170-

0

1

2

A

B

C

E

G

H

K

L

M

N

P

Q

R

S

T

U

V

W

A

B

C

D

E

0

1

2

Selection and ordering data

Article No.

Milltronics bend pulley, 6 inch diameter with 1/4 inch lagging

Return belt driven pulley provides rotation for shaft-driven speed sensors.

The lagging offers self-cleaning advantages and ensures positive rotation.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Size

6 inch diameter with 1/4 inch lagging

Belt width and 'A' dimension

18 inch, A=27 ... 29.5 inch (686 ... 749 mm),
20 inch, A=29 inch (737 mm)

24 inch, A=33 ... 35.5 inch (838 ... 901 mm)

30 inch, A=39 ... 41.5 inch (991 ... 1 054 mm)

36 inch, A=45 ... 47.5 inch (1 143 ... 1 206 mm)

42 inch, A=51 ... 53.5 inch (1 295 ... 1 358 mm)

48 inch, A=57 ... 59.5 inch (1 448 ... 1 511 mm)

54 inch, A=63 ... 65.5 inch (1 600 ... 1 663 mm)

60 inch, A=69 ... 71.5 inch (1 753 ... 1 816 mm)

66 inch, A=75 ... 77.5 inch (1 905 ... 1 968 mm)

500 mm, A=29 ... 31.5 inch (740 ... 800 mm)

650 mm, A=35 ... 37.6 inch (890 ... 954 mm)

800 mm, A=41 ... 43.5 inch (1 040 ... 1 104 mm)

800 mm, A=43 ... 45.4 inch (1 090 ... 1 154 mm)

1 000 mm, A=48.8 ... 51.3 inch (1 240 ... 1 304 mm)

1 200 mm, A=56.6 ... 59.2 inch (1 440 ... 1 504 mm)

1 400 mm, A=64.6 ... 67.1 inch (1 640 ... 1 704 mm)

1 450 mm, A=66.5 ... 69.0 inch (1 690 ... 1 754 mm)

1 600 mm, A=72.4 ... 74.9 inch (1 840 ... 1 904 mm)

Finish

Standard, C5-M rated polyester painted mild steel

316 (1.4401) stainless steel

316 (1.4401) stainless steel with corrosion resistant bearings

Bearings

Imperial size

Metric size

No bearings

Operating instructions

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/weighing/documentation>

Article No.

7MH7171-

0

3

A

B

C

E

G

H

K

L

M

N

P

Q

R

S

T

U

V

W

A

B

C

0

1

2

¹⁾ Available with belt width and "A" dimension options A ... H and N ... T only.

²⁾ Not painted with 4.5 inch diameter model.

³⁾ 316 (1.4401) stainless steel shaft on 4.5 inch diameter models only.

⁴⁾ With corrosion resistant bearings, 316 (1.4401) stainless steel shaft on 4.5 inch diameter models only.

⁵⁾ For 6 inch diameter models only.

Selection and ordering data

Article No.

Milltronics bend pulley, 8 inch diameter

Belt driven pulley for WS Series speed sensors.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Size

8 inch diameter

Belt width and 'A' dimension

48 inch, A=57 ... 59.5 inch (1 447.8 ... 1 511 mm)
 54 inch, A=63 ... 65.5 inch (1 600.2 ... 1 663 mm)
 60 inch, A=69 ... 71.5 inch (1 752.6 ... 1 816 mm)
 66 inch, A=75 ... 77.5 inch (1 905 ... 1 968 mm)
 72 inch, A=81 ... 83.5 inch (2 057 ... 2 121 mm)
 78 inch, A=87 ... 89.5 inch (2 210 ... 2 273 mm)
 84 inch, A=93 ... 95.5 inch (2 362 ... 2 426 mm)
 90 inch, A=99 ... 101.5 inch (2 515 ... 2 578 mm)
 96 inch, A=105 ... 107.5 inch (2 667 ... 2 731 mm)
 1 200 mm, A=56.6 ... 59.2 inch (1 440 ... 1 504 mm)
 1 400 mm, A=64.6 ... 67.1 inch (1 640 ... 1 704 mm)
 1 450 mm, A=66.5 ... 69.0 inch (1 690 ... 1 754 mm)
 1 600 mm, A=72.4 ... 74.9 inch (1 840 ... 1 904 mm)
 1 800 mm, A=80.3 ... 82.8 inch (2 040 ... 2 104 mm)
 2 000 mm, A=88.2 ... 90.7 inch (2 240 ... 2 304 mm)
 2 200 mm, A=96.1 ... 98.6 inch (2 440 ... 2 504 mm)
 2 400 mm, A=103.9 ... 106.4 inch (2 640 ... 2 704 mm)
 2 500 mm, A=107.9 ... 110.4 inch (2 740 ... 2 804 mm)

Finish

Standard, C5-M rated polyester painted mild steel
 316 (1.4401) stainless steel
 316 (1.4401) stainless steel with corrosion resistant bearings
 Epoxy painted
 Epoxy painted with corrosion resistant bearings

Bearings

Imperial size
 Metric size
 No bearings

Operating instructions

All literature is available to download for free, in a range of languages, at
<http://www.siemens.com/weighing/documentation>

Article No.

7MH7187-

0

4

A
B
C
E
G
H
J
K
L
M
N
P
Q
R
S
T
U
V

A
B
C
D
E

0
1
2

Selection and ordering data

Article No.

Milltronics bend pulley, 8 inch diameter with 1/4 inch lagging

Belt driven pulley for WS Series speed sensors. The lagging offers self-cleaning advantages and ensures positive rotation.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Size

8 inch diameter with 1/4 inch lagging

Belt width and 'A' dimension

48 inch, A=57 ... 59.5 inch (1 447.8 ... 1 511 mm)
 54 inch, A=63 ... 65.5 inch (1 600.2 ... 1 663 mm)
 60 inch, A=69 ... 71.5 inch (1 752.6 ... 1 816 mm)
 66 inch, A=75 ... 77.5 inch (1 905 ... 1 968 mm)
 72 inch, A=81 ... 83.5 inch (2 057 ... 2 121 mm)
 78 inch, A=87 ... 89.5 inch (2 210 ... 2 273 mm)
 84 inch, A=93 ... 95.5 inch (2 362 ... 2 426 mm)
 90 inch, A=99 ... 101.5 inch (2 515 ... 2 578 mm)
 96 inch, A=105 ... 107.5 inch (2 667 ... 2 731 mm)
 1 200 mm, A=56.6 ... 59.2 inch (1 440 ... 1 504 mm)
 1 400 mm, A=64.6 ... 67.1 inch (1 640 ... 1 704 mm)
 1 450 mm, A=66.5 ... 69.0 inch (1 690 ... 1 754 mm)
 1 600 mm, A=72.4 ... 74.9 inch (1 840 ... 1 904 mm)
 1 800 mm, A=80.3 ... 82.8 inch (2 040 ... 2 104 mm)
 2 000 mm, A=88.2 ... 90.7 inch (2 240 ... 2 304 mm)
 2 200 mm, A=96.1 ... 98.6 inch (2 440 ... 2 504 mm)
 2 400 mm, A=103.9 ... 106.4 inch (2 640 ... 2 704 mm)
 2 500 mm, A=107.9 ... 110.4 inch (2 740 ... 2 804 mm)

Finish

Standard, C5-M rated polyester painted mild steel
 316 (1.4401) stainless steel
 316 (1.4401) stainless steel with corrosion resistant bearings

Bearings

Imperial size
 Metric size
 No bearings

Operating instructions

All literature is available to download for free, in a range of languages, at
<http://www.siemens.com/weighing/documentation>

Article No.

7MH7188-

0

5

A
B
C
E
G
H
J
K
L
M
N
P
Q
R
S
T
U
V

A
B
C


0
1
2

Belt Weighing

Accessories

Bend pulleys

Dimensional drawings

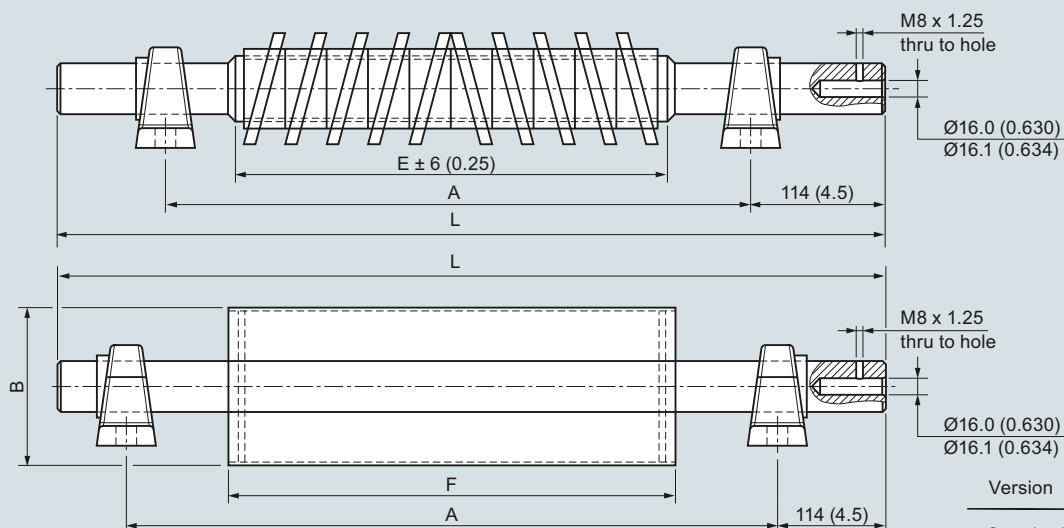









Version	B
Standard	Ø152 (6.0) or 203 (8.0)
Lagged	Ø165 (6.5) or 216 (8.50)

Belt size	E	A	L	F
18 inch, 20 inch	18 inch (460 mm), 20 inch (508 mm)	27 inch (686 mm), 29 inch (737 mm)	34.5 inch (876 mm)	20 inch (508 mm)
24 inch	24 inch (610 mm)	33 inch (838 mm)	40.5 inch (1 029 mm)	26 inch (660 mm)
30 inch	30 inch (762 mm)	39 inch (991 mm)	46.5 inch (1 181 mm)	32 inch (812 mm)
36 inch	36 inch (915 mm)	45 inch (1 143 mm)	52.5 inch (1 334 mm)	38 inch (965 mm)
42 inch	42 inch (1 066 mm)	51 inch (1 295 mm)	58.5 inch (1 486 mm)	44 inch (1 118 mm)
48 inch	48 inch (1 220 mm)	57 inch (1 448 mm)	64.5 inch (1 638 mm)	51 inch (1 296 mm)
54 inch	54 inch (1 371 mm)	63 inch (1 600 mm)	70.5 inch (1 791 mm)	57 inch (1 448 mm)
60 inch	60 inch (1 524 mm)	69 inch (1 753 mm)	76.5 inch (1 943 mm)	63 inch (1 600 mm)
66 inch	66 inch (1 676 mm)	75 inch (1 905 mm)	82.5 inch (2 096 mm)	69 inch (1 752 mm)
72 inch	72 inch (1 828 mm)	81 inch (2 057 mm)	88.5 inch (2 250 mm)	75 inch (1 905 mm)
78 inch	78 inch (1 981 mm)	87 inch (2 210 mm)	94.4 inch (2 400 mm)	81 inch (2 057 mm)
84 inch	84 inch (2 133 mm)	93 inch (2 362 mm)	100.5 inch (2 553 mm)	87 inch (2 210 mm)
90 inch	90 inch (2 286 mm)	99 inch (2 515 mm)	106.5 inch (2 705 mm)	93 inch (2 362 mm)
96 inch	96 inch (2 438 mm)	105 inch (2 667 mm)	112.5 inch (2 858 mm)	99 inch (2 515 mm)
500 mm	500 mm (19.7 inch)	737 mm (29 inch)	34.8 inch (884 mm)	551 mm (21.7 inch)
650 mm	650 mm (25.6 inch)	890 mm (35 inch)	40.7 inch (1 034 mm)	701 mm (27.6 inch)
800 mm	800 mm (31.5 inch)	1 040 mm (41 inch)	46.6 inch (1 184 mm)	851 mm (33.5 inch)
800 mm	800 mm (31.5 inch)	1 090 mm (43 inch)	48.6 inch (1 234 mm)	851 mm (33.5 inch)
1 000 mm	1 000 mm (39.4 inch)	1 240 mm (48.8 inch)	56.3 inch (1 430 mm)	1 052 mm (41.4 inch)
1 200 mm	1 200 mm (47.2 inch)	1 540 mm (60.6 inch)	64.2 inch (1 630 mm)	1 275 mm (50.2 inch)
1 400 mm	1 400 mm (55.1 inch)	1 650 mm (65 inch)	72.0 inch (1 830 mm)	1 476 mm (58.1 inch)
1 450 mm	1 450 mm (57.1 inch)	1 702 mm (67 inch)	74.0 inch (1 880 mm)	1 527 mm (60.1 inch)
1 600 mm	1 600 mm (63.0 inch)	1 940 mm (76.4 inch)	79.9 inch (2 030 mm)	1 676 mm (66 inch)
1 800 mm	1 800 mm (70.7 inch)	80.3 inch (2 040 mm)	87.8 inch (2 230 mm)	73.8 inch (1 875 mm)
2 000 mm	2 000 mm (78.7 inch)	88.2 inch (2 240 mm)	95.7 inch (2 430 mm)	81.7 inch (2 075 mm)
2 200 mm	2 200 mm (86.6 inch)	96.1 inch (2 440 mm)	103.5 inch (2 630 mm)	89.6 inch (2 275 mm)
2 400 mm	2 400 mm (94.5 inch)	103.9 inch (2 640 mm)	111.9 inch (2 830 mm)	97.4 inch (2 475 mm)
2 500 mm	2 500 mm (94.2 inch)	107.9 inch (2 740 mm)	115.4 inch (2 930 mm)	101.4 inch (2 575 mm)

Bend pulley, dimensions in mm (inch)










Selection and ordering data

	Article No.	
Totalizer 150 x 150 x 100D Nema 4 /IP65 enclosure Panel mount totalizer	7MH7723-1GG 7MH7726-1AU	
Ticket printers Ticket printer, TM-U295, 100 ... 240 V	7MH7726-1AK 7MH7723-1GE	
Ribbon Ink EPSON TM-U295	7MH7723-1GE	
Printer cables Printer cables for TM-U295 and TMU220B, RS 232, DB25 ... open end	7MH7726-1AH 7MH7726-1AJ	
Portable Printer FastMark M4DT, USB/BT	A5E36716278	
Roll printer Roll printer, TMU220B, 100 ... 240 V (required for German and Spanish printing)	7MH7726-1AT	
Chart recorder Totalizer with Hi/Low alarm lights, 584 x 483 x 203D Nema 4 /IP65 enclosure	7MH7726-1AL 7ND41211AA011 AA2	 

	Article No.	
Terminal box 1, 2, or 4 load cell(s) / speed sensor, 150 x 200 x 100 NEMA 4 /IP65 enclosure Mild steel Stainless steel Termination board spare Note: For MMI-3, 2 terminal boxes are required	7MH7723-1ND 7MH7723-1NE A5E03623963	
Belt scale connection cable 6 cond, 20 G (order per meter) Note: For use with 1 or 2 load cell belt scales, for 4 or 6 load cell belt scales use 2 cables. This cable is intended for less than 150 m (500 ft). Cable length orders exceeding 150 m (500 ft) may not be supplied as a continuous length.	7MH7723-1JR	
Belt scale installation kit Note: Comes with idler shims, alignment wire, and spacer blocks for idler alignment	7MH7723-1KC	
Inclinometer Celesco model IT9420	7MH7726-1AP	

Belt Weighing Accessories

Belt scale peripherals

Belt scale spare load cells For Milltronics Torque shaft belt scale (MTS), model CD or CFT, mounting hardware included 50 lb (22.7 kg) 75 lb (34 kg) 100 lb (45.4 kg) 150 lb (68 kg) 300 lb (136.1 kg) 500 lb (226.8 kg) 750 lb (340.2 kg) 1 000 lb (453.6 kg) 1 500 lb (680.4 kg)	Article No.		For retrofitting older MMW & MCS belt scales that do not have a conduit adaptor, belt scale mounting hardware included 50 lb 100 lb 250 lb For retrofitting older MIC belt scale, mounting hardware included 25 lb 50 lb (22.7 kg) 100 lb (45.4 kg) 250 lb (113.4 kg) 500 lb (226.8 kg) 1 000 lb (453.6 kg) Kit, 2 idler cable suspension Kit, 2 idler cable suspension, heavy duty Kit, 4 idler cable suspension, heavy duty Kit, 4 idler cable suspension, magnum Kit, 4 idler cable suspension, standard Shock washers Bearing flange 1 3/16	Article No.	
	7MH7725-1BA			7MH7725-1BN	
	7MH7725-1BB			7MH7725-1BP	
	7MH7725-1BC			7MH7725-1BQ	
	7MH7725-1BD				
	7MH7725-1BE			Replace with 50 lb	
	7MH7725-1BF			PBD-61009735	
	7MH7725-1BG			PBD-61009731	
	7MH7725-1BH			PBD-61009732	
	7MH7725-1BJ			PBD-61009733	
				PBD-61009734	
				PBD-61010081	
				PBD-61010082	
				PBD-61010742	
For MSI belt scale with round static beam, low-profile, mounting hardware included, model 60048-XXX-0137 or 60048-XXX-0129 25 lb (11.3 kg) 50 lb (22.7 kg) 100 lb (45.4 kg) 200 lb (90.7 kg) 400 lb (181.4 kg) 500 lb (226.8 kg) 1 000 lb (453.6 kg)				PBD-61010743	
	7MH7725-1AJ			PBD-61010741	
	7MH7725-1AK				
	7MH7725-1AL				
	7MH7725-1AM				
	7MH7725-1AN				
	7MH7725-1AP				
	7MH7725-1AQ				
For retrofitting current and older version of MSI with Group 4, mounting hardware included, sensortronics 60048-xxx-0138, or RTI, Model 6500 50 lb (22.7 kg) 100 lb (45.4 kg) 250 lb (113.4 kg) 500 lb (226.8 kg) 750 lb (340.2 kg) 1 000 lb (453.6 kg)			For MUS HD aluminum, model 7MH71202, mounting hardware included 50 kg (110.2 lb) 100 kg (220.4 lb) 150 kg (330.7 lb) 200 kg (440.9 lb) 300 kg (661.4 lb) 500 kg (1 102.3 lb)	7MH7725-1BW 7MH7725-1BX 7MH7725-1BY 7MH7725-1CA 7MH7725-1CB 7MH7725-1CC	
	7MH7725-1AC				
	7MH7725-1AD				
	7MH7725-1AE				
	7MH7725-1AF				
	7MH7725-1AG				
	7MH7725-1AH				
For retrofitting older version of MSI C462 (transducers incorporated), mounting hardware included 50 lb (22.7 kg) 100 lb (45.4 kg) 250 lb (113.4 kg)			For WD600, model 7MH7185 25 lb (11.3 kg) 50 lb (22.7 kg)	PBD-23900224 PBD-23900225	
	PBD-23900005				
	PBD-23900010				
	PBD-23900012				